

LED floodlight without sensor

LS 300

white
EAN 4007841 069247
Article number 069247



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



IP44



energy saving



plastic free packaging

3 years

manufacturer's warranty
steinel.de/garantie3y



CE

Function description

Extra-powerful illumination. The LS 300 LED floodlight perfectly illuminates entrances and courtyard entries with neutral white light (4,000 K). And for this, it needs just 29,5 W at 2962 lm. The floodlight can be adjusted through 80° horizontally and 150° vertically. Available in black or white. Protection class: IP 44.

Technical specifications

Dimensions (L x W x H)	184 x 213 x 218 mm	Cover material	Glass transparent
With lamp	Yes, STEINEL LED system	Mains power supply	220 – 240 V / 50 – 60 Hz
With motion detector	No	Luminous flux total product	2704 lm
Manufacturer's Warranty	3 years	Measured luminous flux (360°)	2962 lm
Version	white	Total product efficiency	92 lm/W
PU1, EAN	4007841069247	Colour temperature	4000 K
Application, place	Outdoors	Colour variation LED	SDCM6
Application, room	outdoors, garden, courtyard & driveway, multi-storey / underground car park, all round the building, terrace / balcony	Lamp	LED cannot be replaced
Colour	white	LED life expectancy (max. °C)	50000 h
Includes corner wall mount	No	Drop in luminous flux in accordance with LM80	L70B50
Installation site	wall	LED cooling system	Passive Thermo Control
Installation	Wall, Surface wiring	Soft light start	No
Impact resistance	IK03	Basic light level function	No
IP-rating	IP44	Main light adjustable	No
Protection class	I	Interconnection	No
		Output	29,5 W

<https://www.steinell.de>

Subject to technical modifications

02.2023 Page 1 from 2

LED floodlight without sensor

LS 300

white
EAN 4007841 069247
Article number 069247




Technical specifications

Ambient temperature	-10 – 30 °C
Housing material	Aluminium

Colour Rendering Index CRI = 80

Dimension Drawing

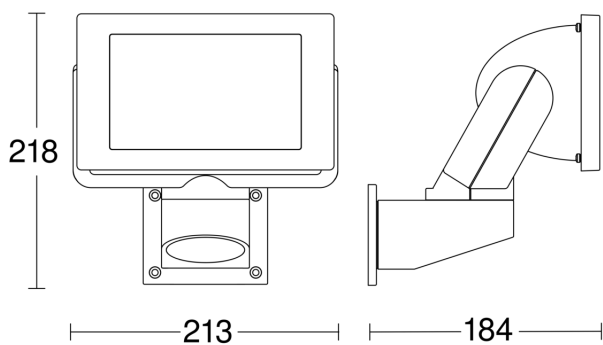

Circuit diagram

