

RS PRO R20 plus Q SC

warm white
 EAN 4007841 067748
 Article number 067748



36 years (Ø 4,5h / day)	Settings via App	3000K warm-white	high frequency sensor 360°	max. 10 m	2 - 2000 lux	IP40	Light source not exchangeable	Control gear not exchangeable	5 sec - 30 min

Function description

Square. Digital. Ingenious. Wirelessly adjustable via app, the digital RS PRO R20 plus Q SC sensor-switched light makes connected lighting incredibly easy. Easily started up, interconnected and adjusted in any chosen way via app, it comes with 4 lighting functions: basic light level, backlight, dimmable main light and emergency light. High-precision HF sensor (10 m reach). The opal diffuser bonnet ensures even light distribution. 15,86 W, 1826 lm. 3000 K, 52 x 300 x 300 mm. Emergency lighting operation is alternatively possible via connection to central battery systems.

Technical specifications

Dimensions (L x W x H)	52 x 300 x 300 mm	Total product efficiency	115 lm/W
With lamp	Yes, STEINEL LED system	Colour temperature	3000 K
With motion detector	Yes	Colour variation LED	SDCM3
Manufacturer's Warranty	5 years	Lamp	LED cannot be replaced
Settings via	Bluetooth	Base	without
With remote control	No	LED cooling system	Passive Thermo Control
Version	warm white	Soft light start	Yes
PU1, EAN	4007841067748	Continuous light	selectable
Application, place	Indoors	Functions	Group parameterisation, Manual ON / ON-OFF, Neighbouring group function, Presence function, Backlight, Orientation light. Connection to central battery systems, Adjustable fade time when switching on and off, Free selection of the light value in a luminaire group, Encrypted communication, Motions sensor, Light sensor
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors		
Colour	white	Twilight setting	2 – 2000 lx
includes sheet of self-adhesive numbers	No		
Installation site	wall, ceiling		
Installation	Wall, Ceiling, Surface wiring		

RS PRO R20 plus Q SC

warm white

EAN 4007841 067748

Article number 067748



Technical specifications

Impact resistance	IK07
IP-rating	IP40
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	PC, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,3 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 10 m (79 m ²)
Reach, tangential	Ø 10 m (79 m ²)
Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	1826 lm

Time setting	5 s – 30 Min.
Basic light level function	Yes
Basic light level function, detail	LED Backlight
Basic light level function time	1-60 min
Main light adjustable	5 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth
Lebensdauer LED nach IEC-62717 (L70)	100000
Lebensdauer LED nach IEC-62717 (L80)	73000
Lebensdauer LED nach IES TM-21 (L70)	60000
Lebensdauer LED nach IES TM-21 (L80)	60000
Absicherung B10 (ST)	46
Absicherung B16 (ST)	74
Absicherung C10 (ST)	77
Absicherung C16 (ST)	122
Basic light level function in per cent	3 – 90 %
Output	15,86 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
Angle of aperture	160 °

Accessories

EAN 4007841 064143


R-series emergency light module

RS PRO R20 plus Q SC

warm white
EAN 4007841 067748
Article number 067748




Detection Zone

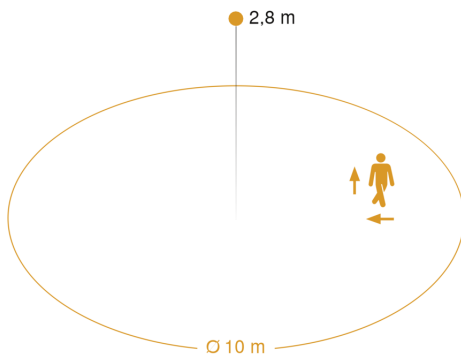


Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

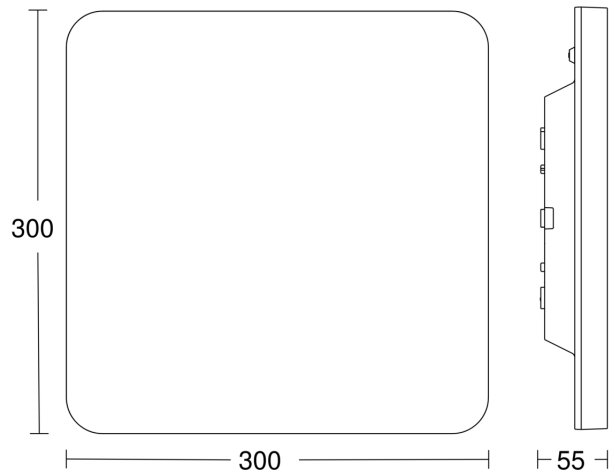

Slave/wireless master interconnection circuit diagram



Master/master interconnection circuit diagram

