






Installation guide
ELIMINATOR® Hermetic filter drier
Type DML / DCL


023R9514

023R9514

Refrigerants: R134a, R404A, R407C, R507, R22, R410A and other refrigerants (HCFC, HFC, HFO, HC)		Temperature range:  -40 - 70 °C -40 - 160 °F	
	1.5, 03, 05, 08, 16, 30, 60 cu in.	$\frac{1}{4} - \frac{7}{8}$ in. ODM / ODF	PS/MWP 46 bar/667 psig
		$\frac{1}{8}$ in. ODM / ODF	
	38, 41 cu in.	$\frac{3}{4} - \frac{7}{8}$ in. ODM / ODF	PS/MWP 35 bar/500 psig
		$\frac{1}{8}$ in. ODM / ODF	
	75 cu in.	$\frac{3}{4} - \frac{1}{8}$ in. ODM / ODF	
	03 – 60 cu in.	$\frac{1}{4} - \frac{7}{8}$ in. ODF	PS/MWP 46 bar/667 psig
		$\frac{1}{8}$ in. ODF	
	75 cu in.	$\frac{7}{8} - \frac{1}{8}$ in. ODF	
	03 – 75 cu in.	$\frac{1}{4} - \frac{3}{4}$ in.	PS/MWP 46 bar/667 psig
Soldering  Danfoss 23Z7016.10			

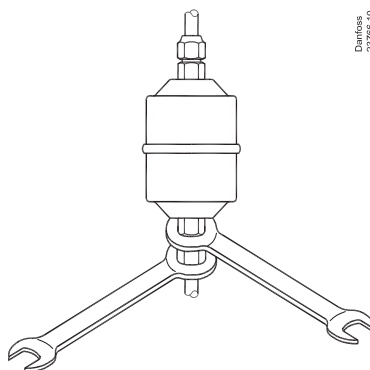

Danfoss
DKRCC-PI.E00.A4.02 / 520H10242

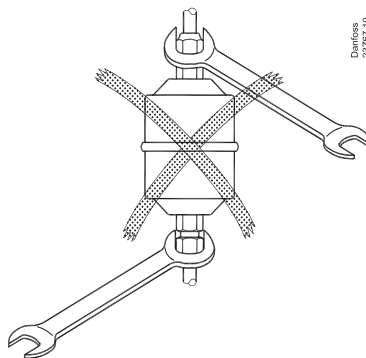


Danfoss
DKRCC-PI.E00.A4.02 / 520H10242



After charging, mark the system with the refrigerant and the oil used.

Mounting

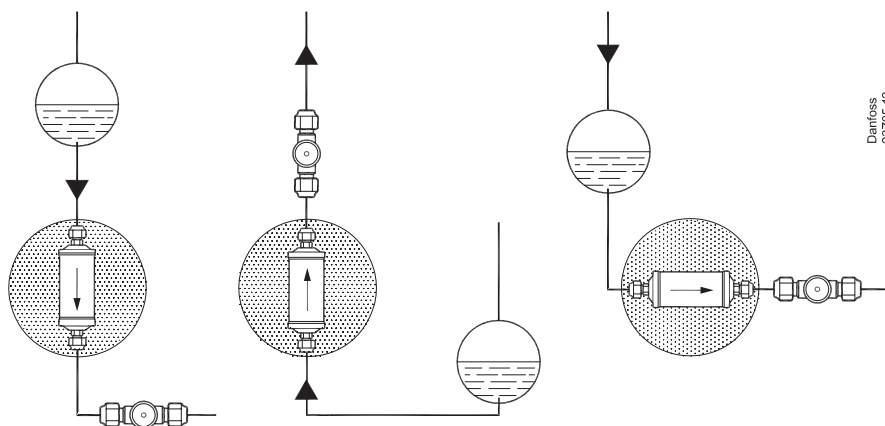

Danfoss
DKRCC-PI.E00.A4.02 / 520H10242