


Data sheet

Shut-off ball valve

Type GBC Version 2

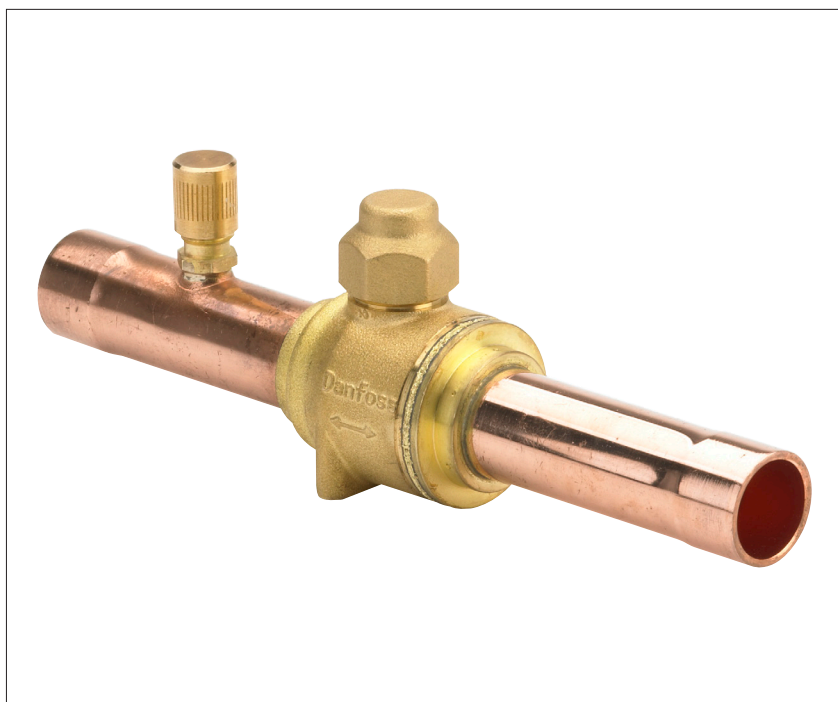

Danfoss shut-off ball valves, type GBC, are manually operated shut-off valves suitable for bi-directional flow.

The GBC valves are used in liquid, suction and hotgas lines in refrigeration and air conditioning systems.

The GBC bi-directional ball valves can be delivered with or without external access port.

The valves have one-piece wire seal cap to prevent unintentional cap removal or tampering between services.

Features

- Broad temperature range equally applicable to freezing, refrigeration and air conditioning applications
- ¼ turn from fully open to fully closed
- Full flow with minimum pressure drop
- Ball status indicator on spindle top indicating open or closed position
- Bi-directional flow, i.e. valve orientation is unimportant
- One-piece seal cap for safety purpose
Complies with European Safety Directive EN 378 (Safety and environmental requirements)
- Laser welded construction
- Rupture proof, internally-loaded spindle design ensures safe operation under extreme pressures
- Drilled and tapped for panel mounting
- Versions with access port helps in reducing cost if service of the system is necessary
- Double O-ring stem seal design
- Customized brass material ensures consistent performance under aggressive environment

Approvals



Technical data

Refrigerants: R134a, R22/R407C, R290, R32, R404A/R507, R407A, R407F, R407H, R410A, R448A, R449A, R449B, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515B, R516A, R1234ze(E), R1234yf

For a complete list of approved refrigerants, visit <http://store.danfoss.com/> and search for individual code numbers, where refrigerants are listed as part of product details.

This product is approved for R290, R32, R452B, R454A, R454B, R454C, R455A, R516A, R1234yf by ignition source assessment in accordance to standard EN13463-1.

Ordering



GBC without access port, Solder ODF/ODF, PS = 45 bar

Type	Connection		K _v value ¹⁾	C _v value ¹⁾	Max. working pressure: PS/MWP	Media temperature range ²⁾	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m ³ /h]	[gal/min]					
GBC 6s	1/4	—	1.83	2.12	45 bar / 650 psig	-40 °C – 100 °C / -40 °F – 212 °F for long term use >100 °C -150 °C / >212 °F - 300 °F for short term use	Yes	Article 4, Paragraph 3	009L7020
	—	6	1.83	2.12					009L7030
GBC 10s	3/8	—	8.04	9.29					009L7021
	—	10	8.04	9.29					009L7031
GBC 12s	1/2	—	13.17	15.22					009L7022
	—	12	13.17	15.22					009L7032
GBC 16s	5/8	16	15.66	18.10					009L7023
GBC 18s	3/4	—	21.93	25.35					009L7024
	—	18	21.93	25.35					009L7035
GBC 22s	7/8	22	33.34	38.54					009L7025
GBC 28s	1 1/8	—	62.25	71.96					009L7026
	—	28	62.25	71.96					009L7033
GBC 35s	1 3/8	35	92.76	107.23					009L7027
GBC 42s	1 5/8	—	134.76	155.78		-40 °C – 100 °C / -40 °F – 212 °F for long term use >100 °C -121 °C / >212 °F - 250 °F for short term use	No	I	009L7028
	—	42	134.76	155.78					009L7034
GBC 54s	2 1/8	54	240.11	277.57					009L7029
GBC 67s	2 5/8	—	367.38	424.69					009L7959
GBC 67s RP	2 5/8	—	203.12	234.81					009L7036
GBC 79s	3 1/8	—	528.87	611.37					009L7980
GBC 79s RP	3 1/8	—	171.89	198.70					009L7037

GBC with access port, Solder ODF/ODF, PS = 45 bar



Type	Connection		K _v value ¹⁾	C _v value ¹⁾	Max. working pressure: PS/MWP	Media temperature range ²⁾	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m ³ /h]	[gal/min]					
GBC 6s	1/4	—	1.83	2.12	45 bar / 650 psig	-40 °C – 100 °C / -40 °F – 212 °F for long term use >100 °C -150 °C / >212 °F - 300 °F for short term use	Yes	Article 4, Paragraph 3	009L7050
	—	6	1.83	2.12					009L7060
GBC 10s	3/8	—	8.04	9.29					009L7051
	—	10	8.04	9.29					009L7061
GBC 12s	1/2	—	13.17	15.22					009L7052
	—	12	13.17	15.22					009L7062
GBC 16s	5/8	16	15.66	18.10					009L7053
GBC 18s	3/4	—	21.93	25.35					009L7054
	—	18	21.93	25.35					009L7065
GBC 22s	7/8	22	33.34	38.54					009L7055
GBC 28s	1 1/8	—	62.25	71.96					009L7056
	—	28	62.25	71.96					009L7063
GBC 35s	1 3/8	35	92.76	107.23					009L7057
GBC 42s	1 5/8	—	134.76	155.78		-40 °C – 100 °C / -40 °F – 212 °F for long term use >100 °C -121 °C / >212 °F - 250 °F for short term use	No	I	009L7058
	—	42	134.76	155.78					009L7064
GBC 54s	2 1/8	54	240.11	277.57					009L7059
GBC 67s	2 5/8	—	367.38	424.69					009L7960
GBC 67s RP	2 5/8	—	203.12	234.81					009L7066
GBC 79s	3 1/8	—	528.87	611.37					009L7981
GBC 79s RP	3 1/8	—	171.89	198.70					009L7067

¹⁾ Calculated based on fluid dynamic equations. RP: Reduced Port

²⁾ For short term use in high temperature application, please consult Danfoss.

³⁾ Please refer to the Danfoss refrigerant list for flammable refrigerants, for other flammable refrigerants please contact Danfoss.

Data sheet | Shut-off ball valve, type GBC Version 2

GBC without access port, ODF/ODF, PS = 49 bar ¹⁾ (The availability of below codes will be updated in October 2019)



Type	Connection		K _v value ²⁾	C _v value ²⁾	Max. working pressure: PS/MWP	Media temperature range	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m³/h]	[gal/min]					
GBC 6s	1/4	—	1.83	2.12	49 bar / 710 psig	-40 °C - 100°C / -40 °F - 212°F	Yes	Article 4, Paragraph 3	009L9020
	—	6	1.83	2.12					009L9030
GBC 10s	3/8	—	8.04	9.29					009L9021
	—	10	8.04	9.29					009L9031
GBC 12s	1/2	—	13.17	15.22					009L9022
	—	12	13.17	15.22					009L9032
GBC 16s	5/8	16	15.66	18.10					009L9023
GBC 18s	3/4	—	21.93	25.35					009L9024
	—	18	21.93	25.35					009L9035
GBC 22s	7/8	22	33.34	38.54					009L9025
GBC 28s	1 1/8	—	62.25	71.96					009L9026
	—	28	62.25	71.96					009L9033
GBC 35s	1 3/8	35	92.76	107.23				II	009L9027
GBC 42s	1 5/8	—	134.76	155.78					009L9028
	—	42	134.76	155.78					009L9034
GBC 54s	2 1/8	54	240.11	277.57					009L9029
GBC 67s	2 5/8	—	367.38	424.69					009L9959
GBC 79s	3 1/8	—	528.87	611.37					009L9980

GBC with access port, ODF/ODF, PS = 49 bar ¹⁾ (The availability of below codes will be updated in October 2019)



Type	Connection		K _v value ²⁾	C _v value ²⁾	Max. working pressure: PS/MWP	Media temperature range	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m³/h]	[gal/min]					
GBC 6s	1/4	—	1.83	2.12	49 bar / 710 psig	-40 °C - 100°C / -40 °F - 212°F	Yes	Article 4, Paragraph 3	009L9050
	—	6	1.83	2.12					009L9060
GBC 10s	3/8	—	8.04	9.29					009L9051
	—	10	8.04	9.29					009L9061
GBC 12s	1/2	—	13.17	15.22					009L9052
	—	12	13.17	15.22					009L9062
GBC 16s	5/8	16	15.66	18.10					009L9053
GBC 18s	3/4	—	21.93	25.35					009L9054
	—	18	21.93	25.35					009L9065
GBC 22s	7/8	22	33.34	38.54					009L9055
GBC 28s	1 1/8	—	62.25	71.96					009L9056
	—	28	62.25	71.96					009L9063
GBC 35s	1 3/8	35	92.76	107.23				II	009L9057
GBC 42s	1 5/8	—	134.76	155.78					009L9058
	—	42	134.76	155.78					009L9064
GBC 54s	2 1/8	54	240.11	277.57					009L9059
GBC 67s	2 5/8	—	367.38	424.69					009L9960
GBC 79s	3 1/8	—	528.87	611.37					009L9981

¹⁾ The 49bar GBC can be only used with flammable refrigerants.

²⁾ Calculated based on fluid dynamic equations.

³⁾ Please refer to the Danfoss refrigerant list for flammable refrigerants, for other flammable refrigerants please contact Danfoss.

GBC without access port, ODF/ODM, PS = 45 bar

Ordering



Type	connection		K _v value ¹⁾	C _v value ¹⁾	Max. working pressure: PS/MWP	Media temperature range ²⁾	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m³/h]	[gal/min]					
GBC 22s	7/8	22	33.34	38.54	45 bar / 650 psig	-40 °C – 100 °C /-40 °F – 212 °F for long term use	Yes	Article 4, Paragraph 3	009L7000
GBC 28s	1 1/8	–	62.25	71.96					009L7001
GBC 35s	1 3/8	35	92.76	107.23		>100 °C -150 °C / >212 °F - 300 °F for short term use	No		009L7002
GBC 42s	1 5/8	–	134.76	155.78				009L7003	
GBC 79s	3 1/8	–	528.87	611.37		-40 °C – 100 °C /-40 °F – 212 °F for long term use	I	009L7969	
					>100 °C -121 °C / >212 °F - 250 °F for short term use				

¹⁾ calculated based on fluid dynamic equations

²⁾ For short term use in high temperature application, please consult Danfoss.

³⁾ Please refer to the Danfoss refrigerant list for flammable refrigerants, for other flammable refrigerants please contact Danfoss.

Data sheet | Shut-off ball valve, type GBC Version 2

GBC with access port, ODF/ ODM, PS = 45 bar



Type	connection		K _v value ¹⁾	C _v value ¹⁾	Max. working pressure: PS/MWP	Media temperature range ²⁾	For flammable refrigerant ³⁾	PED category	Code no.
	[inch]	[mm]	[m³/h]	[gal/min]					
GBC 28s	1 1/8	—	62.25	71.96	45 bar / 650 psig	-40 °C – 100 °C / -40 °F – 212 °F for long term use	Yes	Article 4, Paragraph 3	009L7097
GBC 35s	1 3/8	35	92.76	107.23					009L7098
GBC 42s	1 5/8	—	134.76	155.78		>100 °C -150 °C / >212 °F - 300 °F for short term use	No	I	009L7099
GBC 54s	2 1/8	54	240.11	277.57		-40 °C – 100 °C / -40 °F – 212 °F for long term use			009L7069
GBC 67s	2 5/8	—	367.38	424.69					009L7958
GBC 79s	3 1/8	—	528.87	611.37		>100 °C -121 °C / >212 °F - 250 °F for short term use			009L7970

¹⁾ calculated based on fluid dynamic equations

²⁾ For short term use in high temperature application, please consult Danfoss.

³⁾ Please refer to the Danfoss refrigerant list for flammable refrigerants, for other flammable refrigerants please contact Danfoss.

Spare parts



Seal cap kit

Type	Valve connection size		Industrial pack [pcs]	Code no. for 009Gxxxx series	Code no. for 009Lxxxx 45bar series	Code no. for 009Lxxxx 49bar series
	[inch]	[mm]				
GBC 6s - GBC 12s	¼ – ½	6 – 12	6	009G7210	009L7209	009L7210
GBC 16s - GBC 22s	⅝ – ⅞	16 – 22	6		009L7210	
GBC 28s - GBC 35s	1 ⅛ – 1 ⅜	28 – 35	4	009L7211	009L7211	
GBC 42s - GBC 79s	1 ⅝ – 3 ⅛	42 – 79	4	009L7212	009L7212	




Bracket kit


Type	Valve connection size		Industrial pack [pcs.]	Code no. for 009Gxxxx series	Code no. for 009Lxxxx 45bar series	Code no. for 009Lxxxx 49bar series
	[inch]	[mm]				
GBC 6s - GBC 12s	1/4 – 1/2	6 – 12	12	009G7084	009G7089	009G7084
GBC 16s	5/8	16	12		009G7084	
GBC 18s - GBC 22s	3/4 – 7/8	18 – 22	12	009G7085		
GBC 28s	1 1/8	28	10	009G7086		
GBC 35s	1 3/8	35	5	009G7087		
GBC 42s	1 5/8	42	4	009G7088		

Design / Function

1. Copper extension tubes
2. Valve body
3. Ball seat (PTFE)
4. Valve tail
5. Stainless steel ball
6. Double O-ring seal in spindle (chloroprene)
7. Cap seal (PTFE)
8. Seal cap
9. Spindle
10. Pin
11. Access port cap
12. Guide ring
13. Valve core

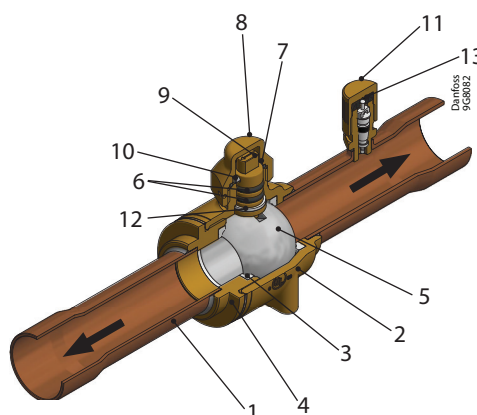

Direct flow gives maximum through-flow with minimum pressure drop across valve. The combination of laser-welded valve body (2) and valve tail (4), ball seat/seal (3), double O-ring seal in spindle (6), and cap seal (7) provides the best tightness.

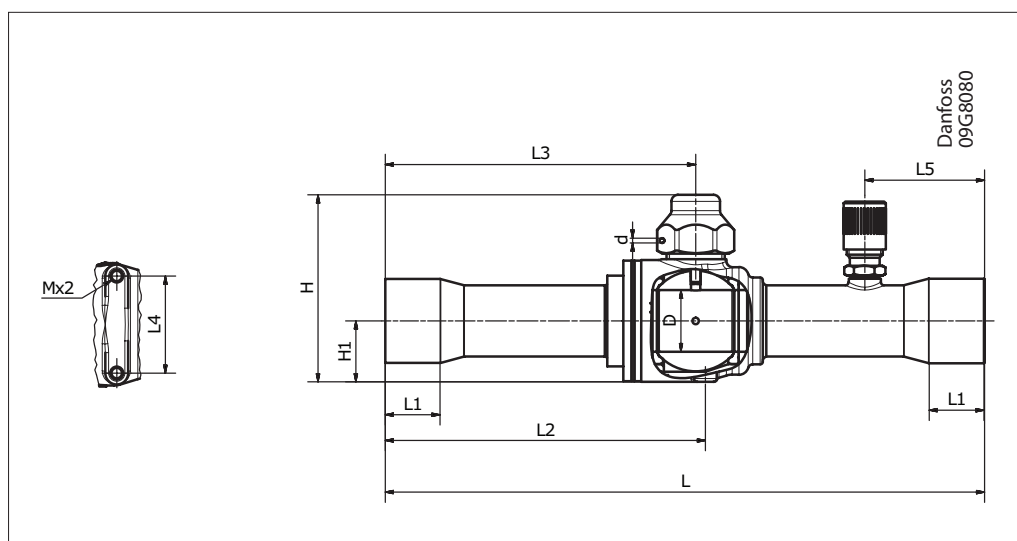Dimension and weight


Type	Connection		H	H ₁	L	L ₁	L ₂	L ₃	L ₄	L ₅	M	D	d	Weight
	[inch]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg] ¹⁾
GBC 6s	1/4	6	43	12	139	7	73	73	16.8	31	M3 × 0.5	11.1	1.5	0.1
GBC 10s	3/8	10	43	12	139	9	73	73	16.8	31	M3 × 0.5	11.1	1.5	0.1
GBC 12s	1/2	12	43	12	161	10	84	84	16.8	31	M3 × 0.5	11.1	1.5	0.1
GBC 16s	5/8	16	50	15	161	12	86	84	22	31	M4 × 0.7	14	1.5	0.2
GBC 18s	3/4	18	58	19	185	14	99	96	30	37	M4 × 0.7	19	1.5	0.4
GBC 22s	7/8	22	58	19	185	17	99	96	30	37	M4 × 0.7	19	1.5	0.4
GBC 28s	1 1/8	28	80	25	208	20	112	108	38	44	M4 × 0.7	25.5	1.5	0.9
GBC 35s	1 3/8	35	89	30	251	25	136	130	48	44	M6 × 1.0	32	1.5	1.4
GBC 42s	1 5/8	42	110	35	281	29	151	145	55	56	M6 × 1.0	38	1.5	2.2
GBC 54s	2 1/8	54	131	46	305	34	167	157	74	56	M6 × 1.0	50	1.5	4.2
GBC 67s	2 5/8	–	149	55	343	38	188	172	84	72	M6 × 1.0	60.5	1.5	5.8
GBC 67s RP	2 5/8	–	131	46	305	37	167	157	74	56	M6 × 1.0	50	1.5	4.4
GBC 79s ODF/ODF	3 1/8	–	169	65	416	38	230	214	86	80	M6 × 1.0	73.5	1.5	9.1
GBC 79s ODF/ODM	3 1/8	–	169	65	406	38	220	204	86	80	M6 × 1.0	73.5	1.5	9.1
GBC 79s RP	3 1/8	–	131	46	305	42	167	157	74	56	M6 × 1.0	50	1.5	4.5

¹⁾ Calculated value
RP: Reduced Port

Type	Connection		H	H ₁	L	L ₁	L ₂	L ₃	L ₄	L ₅	M	D	d	Weight
	[inch]	[mm]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[inch]	[mm]	[inch]	[inch]	[lb] ¹⁾
GBC 6s	1/4	6	1.7	0.5	5.5	0.3	2.9	2.9	0.7	1.2	M3 × 0.5	0.4	0.1	0.3
GBC 10s	3/8	10	1.7	0.5	5.5	0.4	2.9	2.9	0.7	1.2	M3 × 0.5	0.4	0.1	0.3
GBC 12s	1/2	12	1.7	0.5	6.3	0.4	3.3	3.3	0.7	1.2	M3 × 0.5	0.4	0.1	0.3
GBC 16s	5/8	16	2.0	0.6	6.3	0.5	3.4	3.3	0.9	1.2	M4 × 0.7	0.6	0.1	0.5
GBC 18s	3/4	18	2.3	0.7	7.3	0.6	3.9	3.8	1.2	1.5	M4 × 0.7	0.7	0.1	1.0
GBC 22s	7/8	22	2.3	0.7	7.3	0.7	3.9	3.8	1.2	1.5	M4 × 0.7	0.7	0.1	1.0
GBC 28s	1 1/8	28	3.1	1.0	8.2	0.8	4.4	4.3	1.5	1.7	M4 × 0.7	1.0	0.1	2.0
GBC 35s	1 3/8	35	3.5	1.2	9.9	1.0	5.4	5.1	1.9	1.7	M6 × 1.0	1.3	0.1	3.1
GBC 42s	1 5/8	42	4.3	1.4	11.1	1.1	5.9	5.7	2.2	2.2	M6 × 1.0	1.5	0.1	4.9
GBC 54s	2 1/8	54	5.2	1.8	12.0	1.3	6.6	6.2	2.9	2.2	M6 × 1.0	2.0	0.1	9.3
GBC 67s	2 5/8	–	5.9	2.2	13.5	1.5	7.4	6.8	3.3	2.8	M6 × 1.0	2.4	0.1	12.8
GBC 67s RP	2 5/8	–	5.2	1.8	12.0	1.5	6.6	6.2	2.9	2.2	M6 × 1.0	2.0	0.1	9.7
GBC 79s ODF/ODF	3 1/8	–	6.7	2.6	16.4	1.5	9.1	8.4	3.4	3.1	M6 × 1.0	2.9	0.1	20.1
GBC 79s ODF/ODM	3 1/8	–	6.7	2.6	16.0	1.5	8.7	8.0	3.4	3.1	M6 × 1.0	2.9	0.1	20.1
GBC 79s RP	3 1/8	–	5.2	1.8	12.0	1.7	6.6	6.2	2.9	2.2	M6 × 1.0	2.0	0.1	9.9

¹⁾ Calculated value
RP: Reduced Port