

PHILIPS

GreenSpace Accent Elbow

RS342B

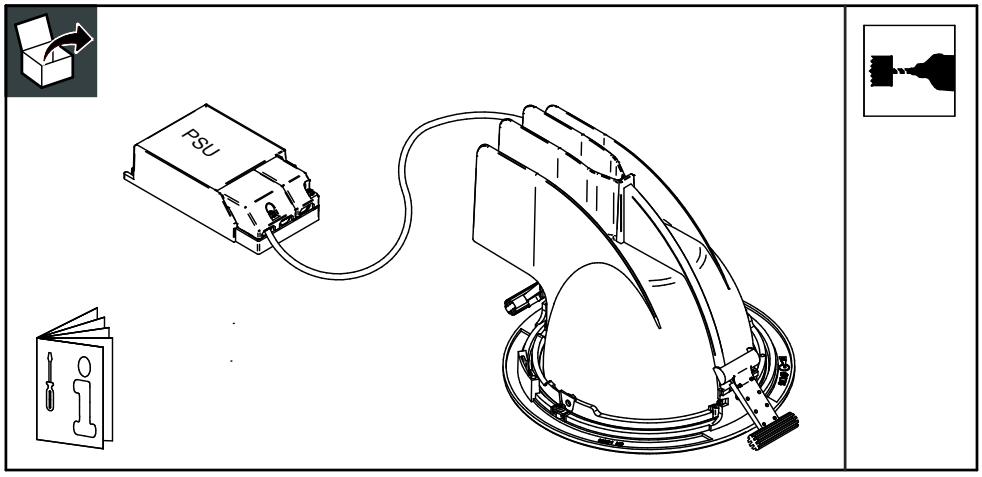

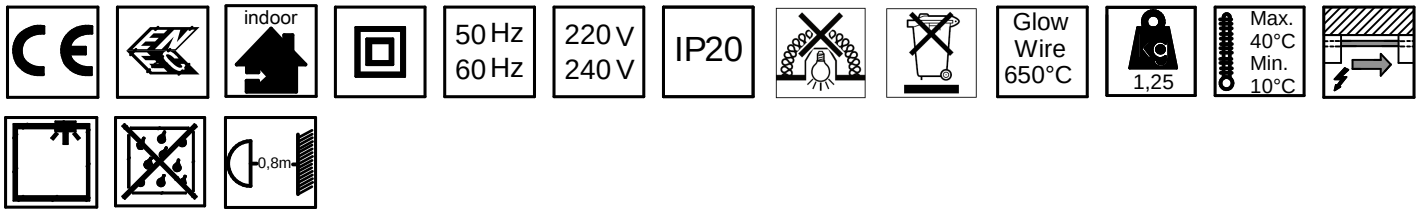

Product family	Optic	CCT	Driver		P [W]		Optic			Cable	
			PSU-E	PSD-E	max.	nom.	NB	MB	WB	CW	CW-L
RS342B	LED17S	827	•	•	18.5	16.6		•	•	•	•
		830	•	•	19.6	18		•	•	•	•
		840	•	•	19.6	18		•	•	•	•
		CRW	•	•	22.5	21		•	•	•	•
		PW9	•	•	21	19.4		•	•	•	•
	LED19S	FMT	•	•	32.5	30		•	•	•	•
	LED26S	FMT	•	•	51	46.5		•	•	•	•
	LED27S	827	•	•	30.5	27.5	•	•	•	•	•
		830	•	•	31.5	29	•	•	•	•	•
		840	•	•	28.5	26	•	•	•	•	•
		CH	•	•	48.5	44.5		•	•	•	•
		CRW	•	•	36.5	33.5	•	•	•	•	•
		PW9	•	•	31.5	28.5	•	•	•	•	•
	LED35S	830	•	•	35.5	32.5		•	•	•	•
		840	•	•	31.5	29		•	•	•	•
	LED39S	827	•	•	46.5	42		•	•	•	•
		830	•	•	42.5	38.5		•	•	•	•
		840	•	•	39	35		•	•	•	•
		CRW	•	•	54.5	51		•	•	•	•
		PW9	•	•	53.5	48		•	•	•	•


4443 160 04794
© 04/2016, Philips Lighting Holding B.V. All rights reserved


Printed in EU
Data subject to change without notice
Keep for future reference: www.philips.com/lighting

Main dimensions

1a


Dimensions in mm

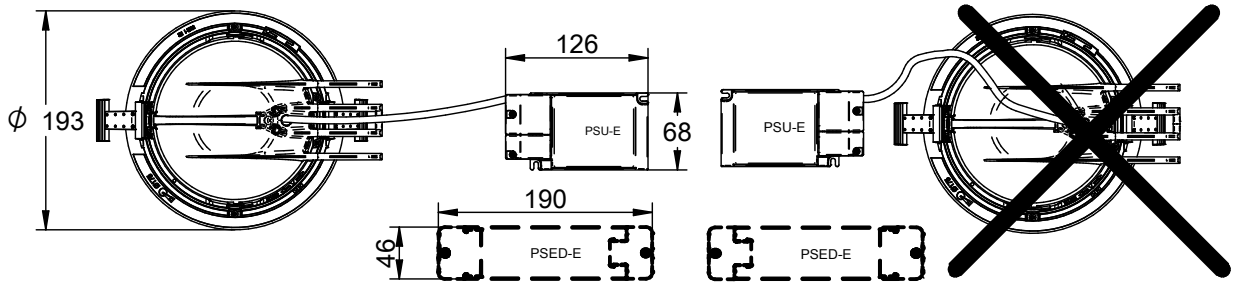

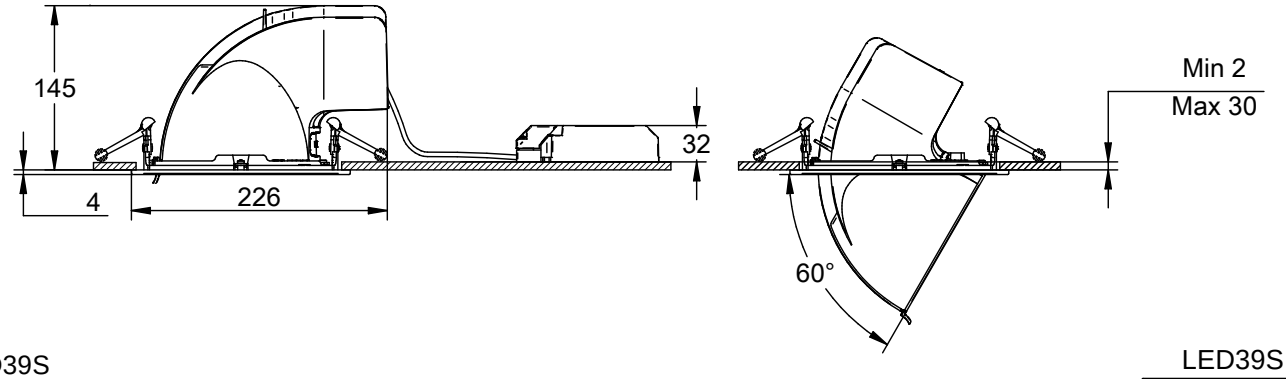


LED39S

Don't touch until it cooled down

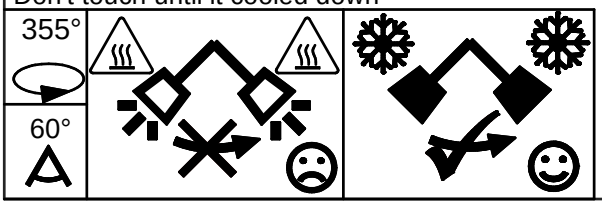


LED39S



Mounted out of arms reach


Installation positions

1b

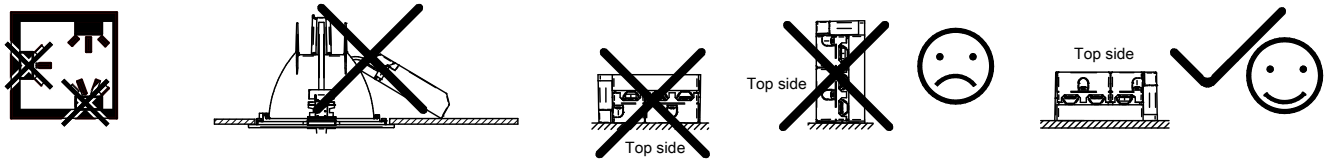



Built in box size


A	375
B	150
C	900

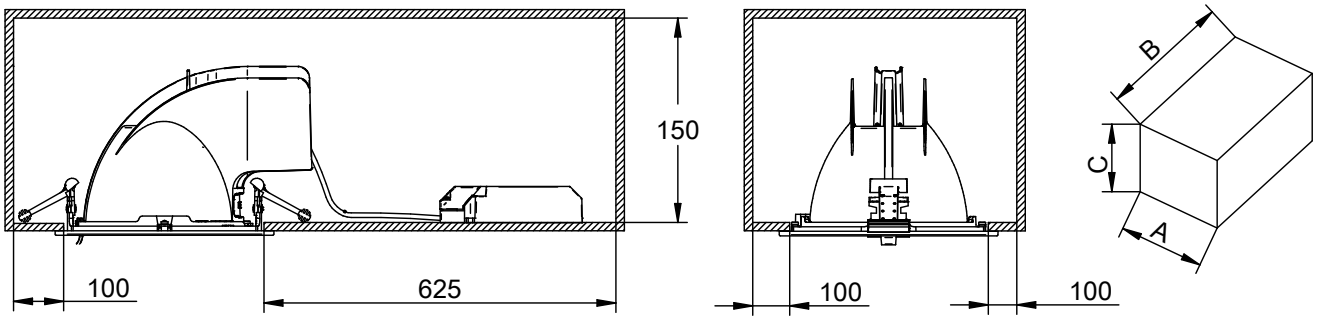



PSU-E

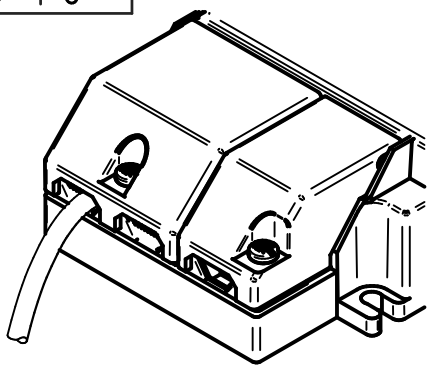

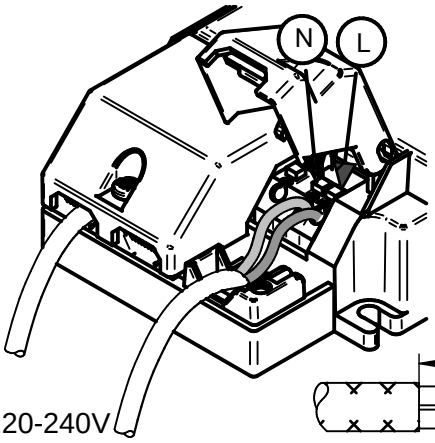




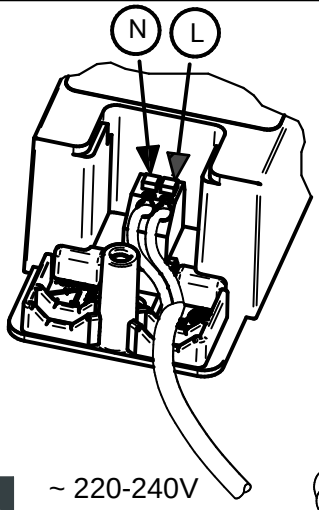




2a


PSD-E

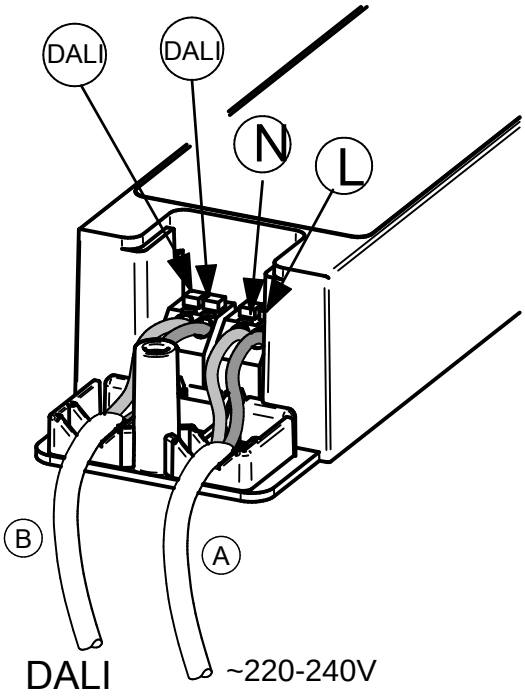


A: ~220-240V cable




B: DALI cable



2b

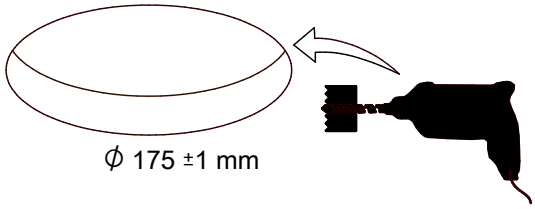



3a

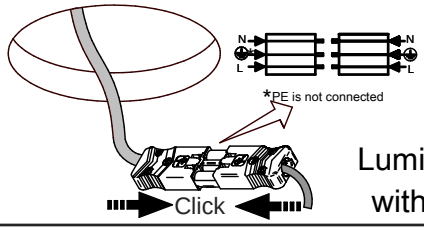



Luminaires with CW3

3b

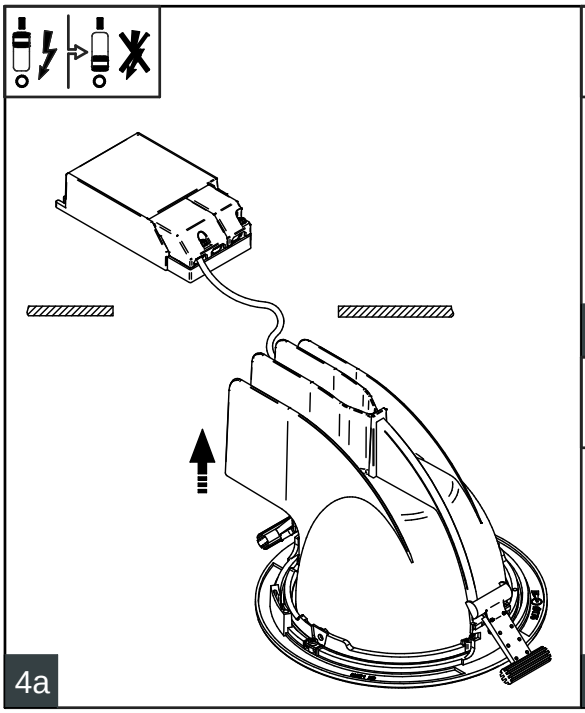


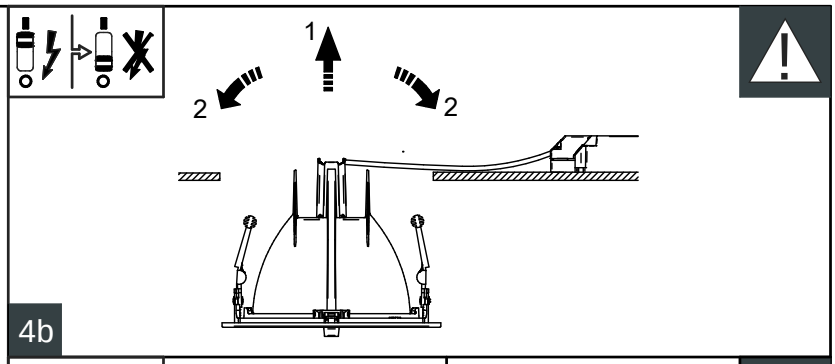

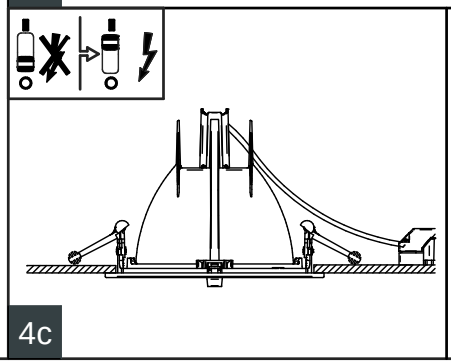

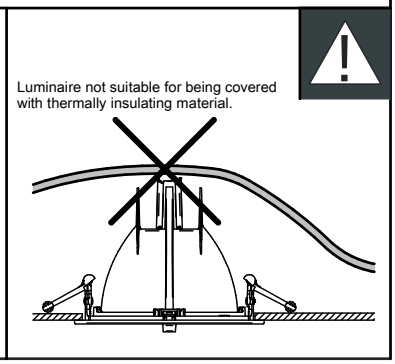


Inrush current

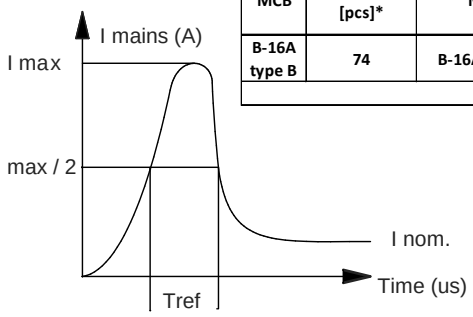

LED17S		LED17S/LED27S/LED19S/LED35S		LED26S/LED27S	
LED Driver 25W 0.3-1A 36V I 230V 929001409080		LED driver 36W 0.3-1A 48V I 230V 929000892506		LED Driver 50W 0.7-1.5A 44V I 230V 929000892606	
I_{nom}[A]	0.15	I_{nom}[A]	0.2	I_{nom}[A]	0.28
I_{peak}[A]	5.2	I_{peak}[A]	6	I_{peak}[A]	23
T_{ref}[us]	50	T_{ref}[us]	55	T_{ref}[us]	280
MCB	Max products [pcs]*	MCB	Max products [pcs]*	MCB	Max products [pcs]*
B-16A type B	74	B-16A type B	39	B-16A type B	19
PSU-E					

LED17S/LED27S/LED35S		LED19S/LED26S/LED27S/LED39S	
Xitanium 36W 0.3-1A 48V TD/I 230V 929000870806		Xitanium 50W LH 0.7-1.5A 48V TD/I 230V 929000904106	
I_{nom}[A]	0.19	I_{nom}[A]	0.32
I_{peak}[A]	20	I_{peak}[A]	5.3
T_{ref}[us]	250	T_{ref}[us]	700
MCB	Max products [pcs]*	MCB	Max products [pcs]*
B-16A type B	32	B-16A type B	30
PSD-E			

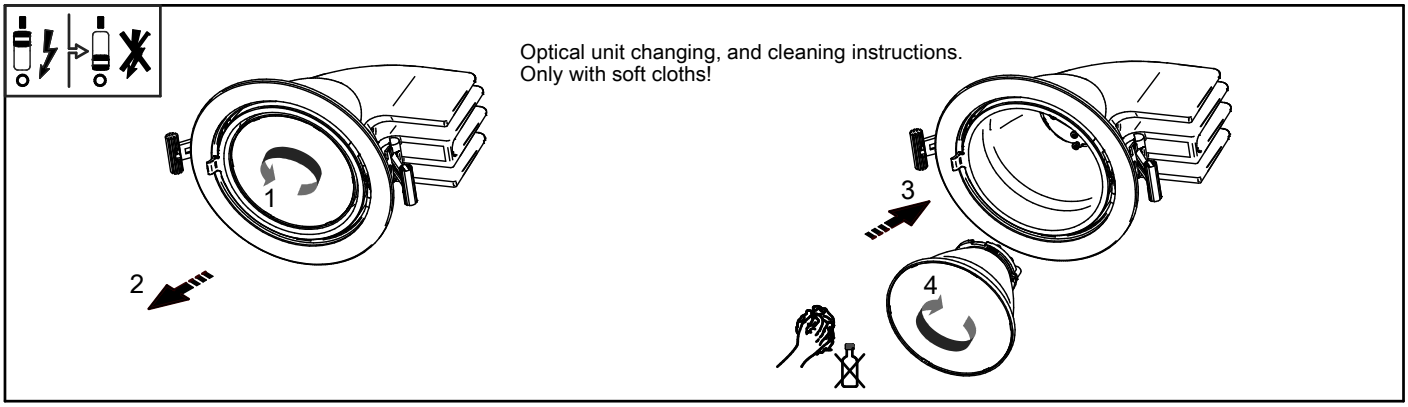

© 2016 Philips Lighting Holding B.V.
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.
Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands