

ORDER CODE **HV00PVCS**

PVCHECKS

MULTIFUNCTION DEVICE FOR COMMISSIONING TESTS OF ELECTRIC SAFETY AND PERFORMANCE OF A PHOTOVOLTAIC SYSTEM


Automatic test in a sequence of:

- **Measurement of insulation** up to 1000VDC
- **Open-circuit voltage** and **short-circuit current Voc/Isc**
- **Continuity of protective conductors** with 200mA

The multifunction device PVCHECKS allows quickly and safely carrying out the commissioning tests provided for a PV system (section in DC) and the functional test of modules/strings the system consists of according to the requirements of Standard **IEC/EN62446**.

When testing safety, PVCHECKS is a real innovation, since it is capable of **measuring insulation of a module, string or of a whole photovoltaic field (IEC/EN62446)** with no need to use an external switch to short-circuit the positive and negative terminals.


PVCHECKS also allows **checking the functionality of the connections and of the strings** in a photovoltaic field, according to the provisions of standard IEC/EN62446 by measuring the open circuit voltage and the short-circuit current at operating conditions (OPC) and referred to STC (via the optional measurement of irradiation, also with the use of optional accessories SOLAR02 and HT304N), providing an **immediate result** as regards the measurement just carried out, both in absolute terms and by comparison with the previously tested strings. Finally, PVCHECKS also allows analyzing the performance of the photovoltaic field (DC) under operating conditions (therefore connected to the inverter) with the use of optional accessories SOLAR02 and HT304N, providing an indication of the generated power and of the performance of the field itself.

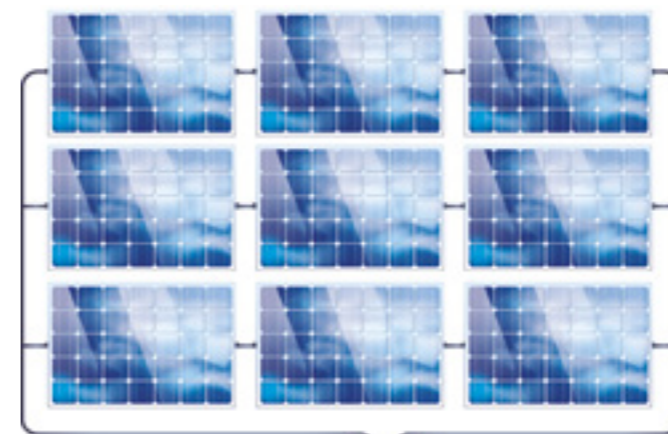


Insulation measurement with method "whole photovoltaic field"




Efficiency measurement of the photovoltaic field

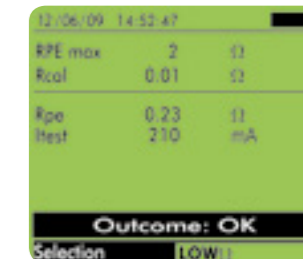


Continuity test result with 200mA OK



Continuity test result with 200mA NOT OK

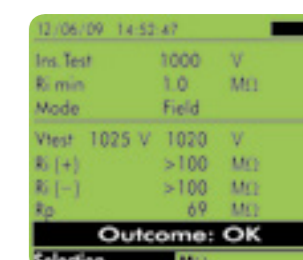

Insulation measurement result at 1000V OK



Automatic sequence test result OK

Functions

Maintenance of photovoltaic system

- Continuity of protective conductors with test current 200mA
- Insulation measurement with test voltage 250,500 and 1000VDC
- Open-circuit voltage (VOC) measurement up to 1000V DC
- Short-circuit current (ISC) measurement up to 15A DC
- DC voltage - DC current - DC power measurement
- Measurement of irradiation [W/m²] through reference cell HT304N
- Environmental and photovoltaic module temperature measurement through PT300N probe
- Use of compensation relationships Cells/Environment on Pdc
- Measurements always compared to the values declared by the module's manufacturer
- Internal database for managing up to 30 PV modules (30.000 modules by software)
- Test measurement of string operation
- Mechanical inclinometer for verifying the correct inclination of sun rays
- Result for every measurement OK/NO
- Internal memory and USB output for PC connection
- Help on line on the display

Efficiency measurements of the photovoltaic system

- Efficiency measurement of the photovoltaic field (DC side)

Main features

Display:	LCD, 128x128pxl, with backlight
Power supply:	6x1.5V alkaline batteries type AA LR06
Auto power off:	after 5 minutes
Internal memory:	256kBytes
PC interface:	optical/USB
Safety:	IEC/EN61010-1
Safety of accessories:	IEC/EN61010-031
Measurements:	IEC/EN 62446
Insulation:	Double insulation
Pollution level:	2
Overvoltage category:	CAT III 1000VDC (to earth) Max 1000V between inputs
Size:	235x165x75mm
Weight (batteries included):	1.2kg

Accessories provided

HT4004	Standard 10-100A DC clamp, diameter 30mm
KITGSC4	Set of 4 cables + 4 alligator clips
KITPCMC3	Set of 2 adapters with connectors MC3
KITPCMC4	Set of 2 adapters with connectors MC4
TOPVIEW2006	Windows software + optical/USB C2006 cable
BORSA2051	Soft carrying bag
	ISO9000 calibration certificate
	User manual and quick guide

Optional accessories

PT300N	PT1000 probe for PV modules temperature
SOLAR02	Remote unit for Irradiation/Temperature measurement
HT304N	Reference cell for irradiation measurement
M304	Mechanical inclinometer
SP-0400	Shoulder strap to use the device with free hands
KITPVEXT25M	Set of 2 banana cables 4mm, Green/Black, 25m
606-IECN	Connectors with magnetic terminal

COMPARISON TABLE FUNCTIONS



SOLAR I-Vw I-V400w SOLAR300N PVCHECKs MPP300

MAINTENANCE AND EFFICIENCY OF THE PHOTOVOLTAIC SYSTEM

Continuity of protective conductors with 200mA	-	-	-	•	-
Insulation measurement with test voltage 250, 500, 1000VDC with no service interruption	-	-	-	•	-
I-V Curve measurement on single module or string	•	•	-	-	-
VOC and ISC measurement on single module or string	•	•	-	•	-
Single-Phase and Three-Phase efficiency measurement	• 1MPPT (3MPPT with MPP300)	-	• 1MPPT (3MPPT with MPP300)	-	•
DC side efficiency of the photovoltaic field	-	-	•	•	-
Use of remote unit SOLAR-02 with USB \ RF connection	• RF	• RF	• USB	• RF	• RF • USB
Measurement of irradiation with reference cell	•	•	•	•	-
Temperature measurement of cell and environment	•	•	•	•	-

POWER QUALITY ANALYSIS

AC/DC voltage in single-phase/three-phase systems	-	-	•	• DC	•
AC/DC current in single-phase/three-phase systems	-	-	•	• DC	•
Cosphi, Power Factor	-	-	•	-	-
Voltage unbalance (NEG%, ZERO%)	-	-	•	-	-
Power/Energy: Active P, Reactive Q, Apparent S	• only active P	-	•	• only active P	-
Voltage and current harmonics up to the 49th with THD%	-	-	•	-	-
Voltage anomalies (dips, peaks) with 10ms resolution (@ 50Hz)	-	-	•	-	-
Voltage fast transients (spikes) with 5µs resolution (200kHz)	-	-	•	-	-
Electric motor starting current (INRUSH)	-	-	•	-	-
Voltage flickers (Pst, Plt)	-	-	•	-	-
Full analysis according to EN50160	-	-	•	-	-
Phase sequence	-	-	•	-	-
Neutral-Ground Voltage	-	-	•	-	-
Neutral current	-	-	•	-	-

MEMORY AND RECORDING

Max number of simultaneously selectable parameters	9	-	251	5	-
Recording with selectable integration period	5s-60m	-	1s-60m	5s-60m	1s-60m
Indicative memory duration (in days @ PI=10min @ max number of parameters)	8	-	90	-	8
Indication of recording duration for power quality analysis	-	-	•	-	-
Internal memory extension with Compact Flash card	-	-	•	-	-



SOLAR I-Vw I-V400w SOLAR300N PVCHECKs MPP300

» FOLLOWS

Default and custom recordings	-	-	•	-	-
-------------------------------	---	---	---	---	---

REAL-TIME DISPLAY

Summary table of main electric parameters	•	•	•	•	-
Voltage/current waveforms	-	-	•	-	-
Tables or histograms of Harmonics and THD%	-	-	•	-	-
Voltage/current vector diagram	-	-	•	-	-

ADDITIONAL CHARACTERISTICS

Measuring range of I-V Curve / IVCK	1000V / 15A	1000V / 15A	-	1000V / 15A only VOC and ISC	-
Measuring range for efficiency measurement	1000VDC / 265VAC	-	1000VAC-DC 3000A	-	1000VDC / 600VAC 3000AC / 1000ADC
Measurement category:	CAT III 300V	CAT III 300V	CAT IV 600V	CAT III 300V	CAT IV 300V
Touchscreen colour display	-	-	•	-	-
LCD display with backlight	•	•	-	•	-
Internal memory capacity	200 curves I-V 8 days@ PI=10 min	200 curves I-V	15MB 90 days@ PI 10min	999 Locations	2MB 8 days@ PI=10 min
USB port for data download onto Pen Drive	-	-	•	-	-
PC interface with software for Windows	•	•	•	•	-
Integrated WiFi interface	•	•	-	-	-
Custom management of internal PV module database	•	•	-	•	-
Power supply with rechargeable battery and battery charger	-	-	•	-	•
Auto power off	•	•	•	•	•
Indication of recording duration for efficiency measurement	•	-	•	-	-
Reference standard for Power Quality Analysis	-	-	EN50160	-	-
Help on line on the display	•	•	•	•	-
Size (LxWxH) (mm)	235x165x75	235x165x75	235x165x75	235x165x75	300x265x214
Weight in kg (batteries included)	1.2	1.2	1	1.2	2.3
Reference standard for safety	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1
Order Code	HV000IVW	HV00400W	HV00300N	HV00PVCS	HVMPP300

COMPARISON TABLE OF ACCESSORIES



	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300
 TOPVIEW2006 TOPVIEW2007* PC Windows software + USB/optical cable <i>ORDER CODE HA000716</i> <i>* ORDER CODE HA000714</i>	S TOPVIEW2006	S TOPVIEW2006	S TOPVIEW2007	S TOPVIEW2006	-
 PT300N PT1000 probe for PV module temperature <i>ORDER CODE HA00300N</i>	S	O	S	O	-
 SOLAR02 Remote unit for Irradiation and Temperature <i>ORDER CODE HA000120</i>	S	O	S	O	-
 KITGSC4 Set of 4 cables + 4 alligator clips <i>ORDER CODE HA000021</i>	S	S	-	S	-
 KITPVMC3 - KITPCMC3* Set of 2 adapters with connectors MC3 <i>ORDER CODE HA000032</i> <i>* ORDER CODE HA000757</i>	S KITPVMC3	S KITPVMC3	-	S KITPCMC3	-
 KITPVMC4 - KITPCMC4* Set of 2 adapters with connectors MC4 <i>ORDER CODE HA000034</i> <i>* ORDER CODE HA000758</i>	S KITPVMC4	S KITPVMC4	-	S KITPCMC4	-
 KIT800 Set of 5 cables + 5 alligator clips <i>ORDER CODE HA008000</i>	-	-	S	-	-
 KITMPPACC Set of 4 alligator clips for AC voltage <i>ORDER CODE HA000752</i>	-	-	-	-	S
 KITMPPACW Set of 4 cables for AC voltage 2m <i>ORDER CODE HA000753</i>	-	-	-	-	S
 KITMPPDCC Set of 2 alligator clips for DC voltage <i>ORDER CODE HA000754</i>	-	-	-	-	S
 KITMPPDCW Set of 2 alligator clips for DC voltage <i>ORDER CODE HA000755</i>	-	-	-	-	S
 A0055 External power supply AC/DC battery charger 230V 50/60Hz** <i>ORDER CODE HA005500</i>	-	-	S	-	S













S = Standard O = Optional

*Adapter ACON3F4M necessary

**Please check accessory line to find the correct power adapter for your country

» FOLLOWS



	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300
 PT400 Touch-screen pen <i>ORDER CODE HA0PT400</i>	-	-	S	-	-
 HT304N Sensor for irradiation measurement <i>ORDER CODE HA0304N0</i>	S	S	S	O	-
 M304 Mechanical inclinometer <i>ORDER CODE HA000026</i>	S	S	-	O	-
 HT4004N Standard 10-100A DC clamp, diameter 32 mm <i>ORDER CODE HP04004N</i>	S	-	S	-	O*
 HT4005K Standard 200A AC clamp, diameter 40 mm <i>ORDER CODE HP04005K</i>	S	-	S	-	O
 C2007 USB cable <i>ORDER CODE HA002007</i>	-	-	S	-	S
 BORSA2051 Soft carrying bag <i>ORDER CODE HA002051</i>	-	-	-	S	S
 SP-0400 Shoulder strap to use the device with free hands <i>ORDER CODE HA000112</i>	O	O	O	O	-
 KITPVEXT25M Green and black cable extension, length 25m <i>ORDER CODE HA000129</i>	O	O	-	O	-
 VA500 Rigid Carrying case <i>ORDER CODE HA050000</i>	S	S	S	-	-
 MPP300 Accessory for measuring and recording the efficiency of a single- and three-phase single- and multi-string photovoltaic system (up to three MPPT) <i>ORDER CODE HVMPP300</i>	O	-	O	-	-
 HT96U Standard clamp 1-100-1000A AC, diameter 54 mm <i>ORDER CODE HP00096U</i>	O	-	O	-	O

S = Standard O = Optional

*Adapter ACON3F4M necessary

COMPARISON TABLE OF ACCESSORIES

> FOLLOWS



	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300
HT97U Standard clamp 10-100-1000A AC, diameter 54 mm ORDER CODE <i>HP000972</i>	0	-	0	-	0
HT98U Standard 1000A DC clamp, diameter 50 mm ORDER CODE <i>HP00098U</i>	0	-	0	-	0*
HTFLEX33E Flex 3000A AC clamp, diameter 174mm ORDER CODE <i>HP00033E</i>	-	-	0	-	0
HP30D1 Standard 1000A DC clamp, diameter 83 mm ORDER CODE <i>HP0030D1</i>	0	-	0	-	0*
HP30C3 Standard 3000A AC clamp, diameter 70 mm ORDER CODE <i>HP003003</i>	-	-	0	-	0
HP30C2 Standard 200-2000A AC clamp, diameter 70 mm ORDER CODE <i>HP003002</i>	-	-	0	-	0
HT4004P Standard 10-100 ADC clamp, diameter 32 mm ORDER CODE <i>HP04004P</i>	-	-	-	-	0
HT4004 Standard 10-100A DC clamp, diameter 30 mm ORDER CODE <i>HP004004</i>	-	-	-	S	-
HT903 3x1 - 5A/1V box for TA connection ORDER CODE <i>HA019030</i>	-	-	0	-	-
606-IECN Magnetic connectors for voltage measurement ORDER CODE <i>HA006060</i>	0	-	0	0	0
ACON3F4M Adapter for the connection of clamps HT4004N, HP30D1 and HT98U to MPP300 ORDER CODE <i>HA00ACON</i>	-	-	-	-	S 3 pieces

S = Standard 0 = Optional *Adapter ACON3F4M necessary



ORDER CODE *HA000406*



ANALYSIS TAB

7.85" IPS Touchscreen, Quad Core, Dual SIM 3G

HT introduces the new tablet with pre-installed HTAnalysis App to immediately start working, right from the first time.

WITH **ANALYSIS TAB** you will:

- Work in a quicker way
- Work in a more collaborative way
- Reduce the amount of paper documents
- Work more safely, protected from any danger of direct contact
- Through HTCLOUD you will be able to share all measurements with your colleagues and/or download them from the PC without physically connecting the device to the PC

CHARACTERISTICS **TABLET**

CPU: MT8382 Cortex A7 Quad Core 1.2Ghz
 GPU: Mali-400 MP2 Graphic Processor
 RAM: 1GB DDR3
 Cell network: Dual SIM 3G
 Internal memory: NAND FLASH 8 GB
 External memory: MicroSD Slot
 Display: 7.85" LCD 1024 x768 (4:3)
 OS: Android 4.4 OS
 Display: Capacitive touchscreen
 Photo camera: 0.3MP (front), 2.0MP (back)

COMPATIBLE DEVICES
MacroTestG3, G2, G1
CombiG2
PQA820, PQA819
HT9022

