



**Coupling, conical seat, butt welding/
male thread 12032 XX**

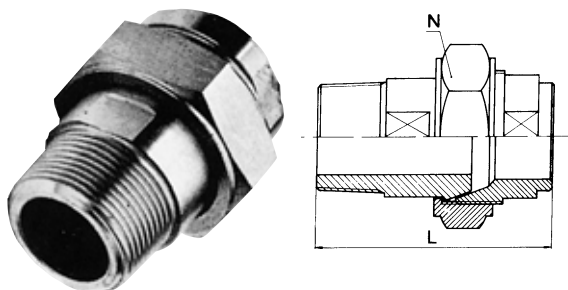

Coupling, butt welding/male thread NS	hits. D	R	L mm	N mm	XX
6	10,2	1/8"	40	27	21
8	13,5	1/4"	47	27	22
10	17,2	3/8"	53	32	23
15	21,3	1/2"	62	41	24
20	26,9	3/4"	66	50	25
25	33,7	1"	74	55	26
32	42,4	1 1/4"	81	70	27
40	48,3	1 1/2"	84	75	28
50	60,3	2"	87	90	29
65	76,1	2 1/2"	97	110	30
80	88,9	3"	109	130	31

**Coupling, conical seat, butt welding/
female thread 12032 XX**

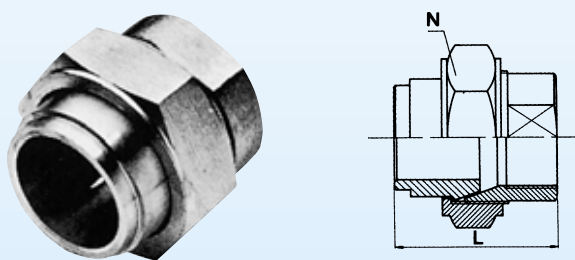

Coupling, butt welding/female thread NS	D mm	R	L mm	N mm	XX
6	10.2	1/8"	32	27	01
8	13.5	1/4"	38	27	02
10	17.2	3/8"	41	32	03
15	21.3	1/2"	46	41	04
20	26.9	3/4"	50	50	05
25	33.7	1"	56	55	06
32	42.4	1 1/4"	62	70	07
40	48.3	1 1/2"	64	75	08
50	60.3	2"	67	90	09
65	76.1	2 1/2"	70	110	10
80	88.9	3"	83	130	11