




SOLENOID VALVE
2/2 - NC (Normally closed)
Pilot operated
G3/8 ÷ 1

L145

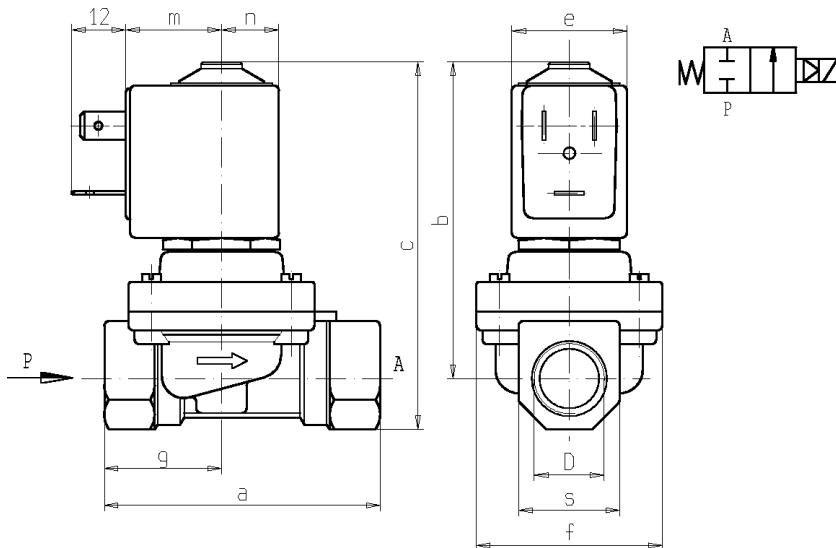

D	a	b	c	e	f	m	n	s	g
G 3/8	60	69	80	25	40	21	12,5	22	25,5
G 1/2	66	72	85	25	40	21	12,5	27	33
G 3/4	79	78	94,5	32	50	27	16	33	39,5
G 1	105	102	123	32	71	27	16	42	46

► **GENERAL FEATURES**

Diaphragm valve, pilot operated, having full orifice.
Suitable to shut off liquid and gaseous fluids; particularly suitable to shut off overheated water and steam (verify the compatibility of fluid with materials in contact).

► **TECHNICAL FEATURES**

Maximum allowable pressure (PS) G3/8 and G1/2: 16 bar
G3/4 and G1: 9 bar
Opening time ~100ms
Closing time from ~500ms to ~1500ms
Fluid temperature +60°C +170°C
Max viscosity 5°E (~37 cStokes or mm²/s)

► **MATERIALS IN CONTACT WITH FLUID**

Body	Brass
Sealing	Reinforced PTFE (Polytetrafluorethylene)
Internal components	Brass and stainless steel
Seat	Stainless steel
Guide assembly	Stainless steel
Shading ring	Copper

► **COIL**


Continuous duty	ED 100%
Encapsulation material	PET (polyethylene terephthalate) fiberglass reinforced
Insulation class	Z5: H(165°C) - UL - Z6: H(180°C) - UL
Ambient temperature	-10 °C° +80 °C
Electric connenctions	Z5: DIN 46340 - 3 poles connector (DIN 43650) Z6: DIN 46340 - 3 poles connector
Protection degree	IP 65 (EN 60529) with plug connector
Voltages	AC 24V/50Hz - 110V/50Hz (120V/60Hz) 230V/50Hz (+10% -15%) (Other voltages and frequencies on request).

Port size ISO 228	Ø Int. (mm)	Differential pressure (bar)					Kv (m³/h)	Series and type		Power absorption			Sealings	Notes	Weight (kg)
		Δp min	Δp max							AC (VA)		c.c. (W)			
			Gas		Liquids			Valve	Coil	Inrush	Holding				
			c.a.	c.c.	c.a.	c.c.									
G 3/8	10	0,4	8	-	8	-	2	L145R2	Z614A	16	10	-	reinforced PTFE	1	0,360
G 1/2							2,5								
G 3/4	6		6		4,5		L145R4	Z534A	23	14	0,760				
G1					18,5		8,5				L145R2				1,365

► **NOTES**

- Sealings : PTFE = Polytetrafluorethylene (reinforced)
1 - On request Z610A or Z530A coil, encapsulated in PET (Polyethylene terephthalate) class "F" (+155°C): maximum fluid temperature +100°C, maximum ambient temperature +60°C.

► SPARE PARTS

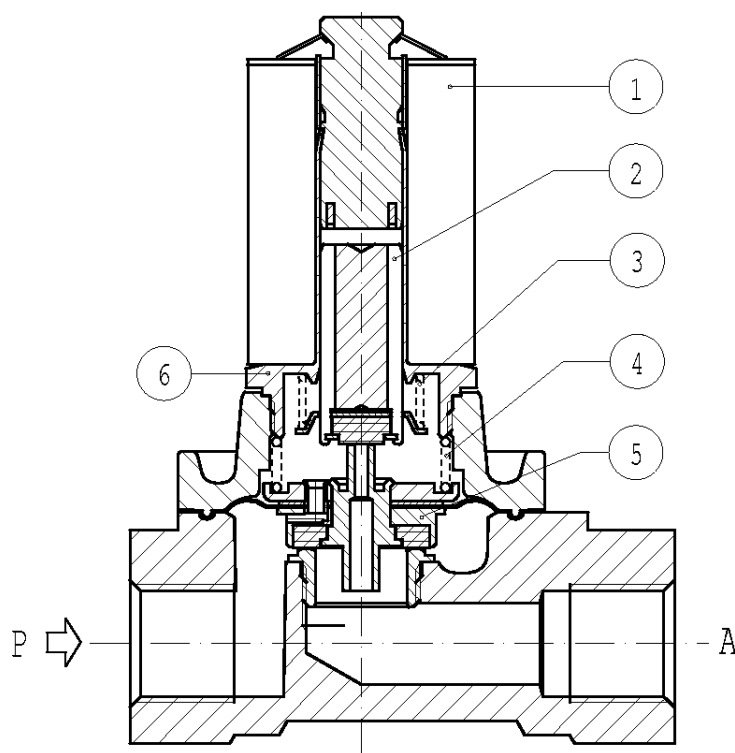

Kit description		Kit P.N.	Consisting of:
Core kit	G3/8 – G1/2 G3/4 – G1	G2641702 G2665102	Core pos. 2 Core return spring pos. 3
Diaphragm assembly kit	G3/8 – G1/2 G3/4 G1	G2647501 G2653301 G2665201	Diaphragm assembly pos. 5 Spring on diaphragm pos. 4
Spring on diaphragm kit	G3/8 – G1/2 G3/4 G1	G2635301 G2641501 G2662201	N. 10 springs on diaphragm pos. 4
Core return spring kit	G3/8 – G1/2 G3/4 – G1	G2651301 G2555101	N.10 core return spring pos. 3
Guide pipe assembly	G3/8 – G1/2 G3/4 – G1	2817601R 2797701R	Guide pipe assembly pos. 6
Coil	G3/8 – G1/2 G3/4 – G1	Z614A Z534A	Coil pos. 1

► MOUNTING

Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATING ARE AVAILABLE ON REQUEST.