


Panel mounted socket TM - Part no. 24640



- screw terminals
- highly heat resistant contact carrier
- nickel plated contacts
- 20° inclination
- (form BS)

Protection type	IP 67
Ampere	16A
Poles	5p
Voltage	400V
Hertz	50-60Hz
Earth position	6h
Contact	nickel plated contacts, highly heat resistant contact carrier
Connection technology	Screw terminals

Std. Pack. 10 Qty.

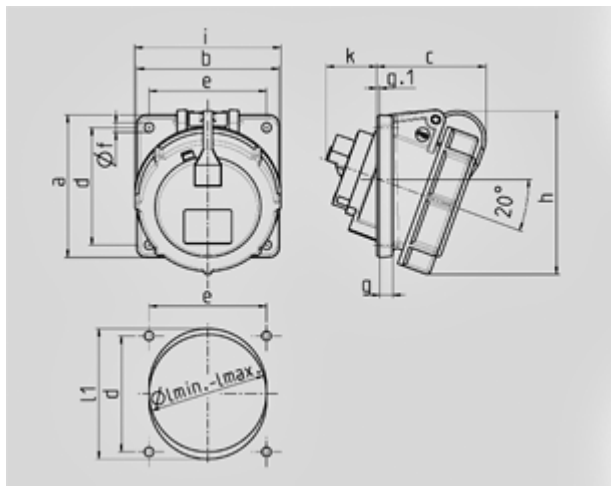

Drawing	Amp.	16		32		63
1 MB 474	Pole	3	5	3/4	5	3/4/5
Maße in mm						
a		85	85	85	85	114
b		85	85	85	85	114
c		71	65	65	80	98
d		70	70	70	70	90
e		70	70	70	70	90
f		5,5	5,5	5,5	5,5	5,5
g		8	8	8	8	12
g.1		2	2	2	2	2
h		92	98	101	115	135
i		70	87	94	101	112
k		39	33	53	53	70
I min.		57	70	78	78	92
I max.		78	78	78	78	105
l1		—	—	—	—	105
Terminal for cond. cross section (mm²) min.-max.		1,5	1,5	2,5	2,5	6
		—4	—4	—10	—10	—25