


## Wall mounted socket - Part no. 1268



- screw terminals
- external fixing
- cable entry at top

|                       |                 |
|-----------------------|-----------------|
| Protection type       | IP 44           |
| Ampere                | 16A             |
| Poles                 | 4p              |
| Voltage               | 400V            |
| Hertz                 | 50-60Hz         |
| Earth position        | 6h              |
| Contact               | standard        |
| Connection technology | Screw terminals |

Std. Pack. 10 Qty.

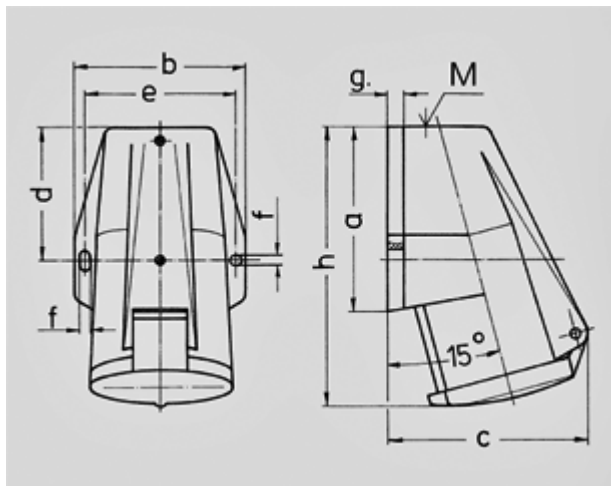

| Drawing                  | Amp.  | 16  |     |      | 32   |      |     |
|--------------------------|-------|-----|-----|------|------|------|-----|
|                          |       | 3   | 4   | 5    | 3    | 4    | 5   |
| 1 MB 205                 | Poles |     |     |      |      |      |     |
| Dim. in mm               | a     | 91  | 91  | 91   | 102  | 102  | 102 |
|                          | b     | 73  | 79  | 87   | 89   | 89   | 94  |
|                          | c     | 86  | 93  | 99   | 108  | 108  | 114 |
|                          | d     | 55  | 55  | 56,4 | 62   | 62   | 62  |
|                          | e     | 62  | 68  | 76   | 77,5 | 77,5 | 84  |
|                          | f     | 5,3 | 5,3 | 5,3  | 5,3  | 5,3  | 5,3 |
|                          | g     | 8   | 8   | 9    | 10   | 10   | 10  |
|                          | h     | 132 | 132 | 132  | 153  | 153  | 153 |
|                          | M     | 20  | 25  | 25   | 25   | 25   | 32  |
| Max. cable diam. (mm)    |       | 13  | 18  | 18   | 18   | 18   | 25  |
| Terminal for cond. cross |       | 1,5 | 1,5 | 1,5  | 2,5  | 2,5  | 2,5 |
| section (mm²) min.-max.  |       | —4  | —4  | —4   | —10  | —10  | —10 |