




	Voltage	Free air displacement		Ultimate vacuum		Motor		Motor Speed	Oil cap.	Dimensions	Net weight
MK-040-DS	220 V/50 Hz	40 L/min	1,44 CFM	15 micron	0,020 mBar	0,19 kW	1/4 HP	1440 RPM	480 ml	350 mm x 160 mm x 270 mm	10,40 kg
	110 V/60 Hz	48 L/min	1,70 CFM			0,19 kW	1/4 HP	1720 RPM			
MK-060-DS	220 V/50 Hz	66 L/min	2,30 CFM	15 micron	0,020 mBar	0,25 kW	1/3 HP	1440 RPM	480 ml	350 mm x 160 mm x 270 mm	11,00 kg
	110 V/60 Hz	78 L/min	2,75 CFM			0,25 kW	1/3 HP	1720 RPM			
MK-120-DS	220 V/50 Hz	132 L/min	4,66 CFM	15 micron	0,020 mBar	0,25 kW	1/3 HP	2880 RPM	800 ml	385 mm x 170 mm x 310 mm	14,60 kg
	110 V/60 Hz	156 L/min	5,50 CFM			0,37 kW	1/2 HP	3440 RPM			
MK-180-DS	220 V/50 Hz	176 L/min	6,23 CFM	12 micron	0,016 mBar	0,37 kW	1/2 HP	2880 RPM	1120 ml	385 mm x 170 mm x 310 mm	16,40 kg
	110 V/60 Hz	212 L/min	7,50 CFM			0,50 kW	2/3 HP	3440 RPM			
MK-280-DS	220 V/50 Hz	273 L/min	9,64 CFM	12 micron	0,016 mBar	0,50 kW	2/3 HP	2880 RPM	1070 ml	385 mm x 170 mm x 310 mm	16,90 kg
	110 V/60 Hz	326 L/min	11,50 CFM			0,56 kW	3/4 HP	3440 RPM			

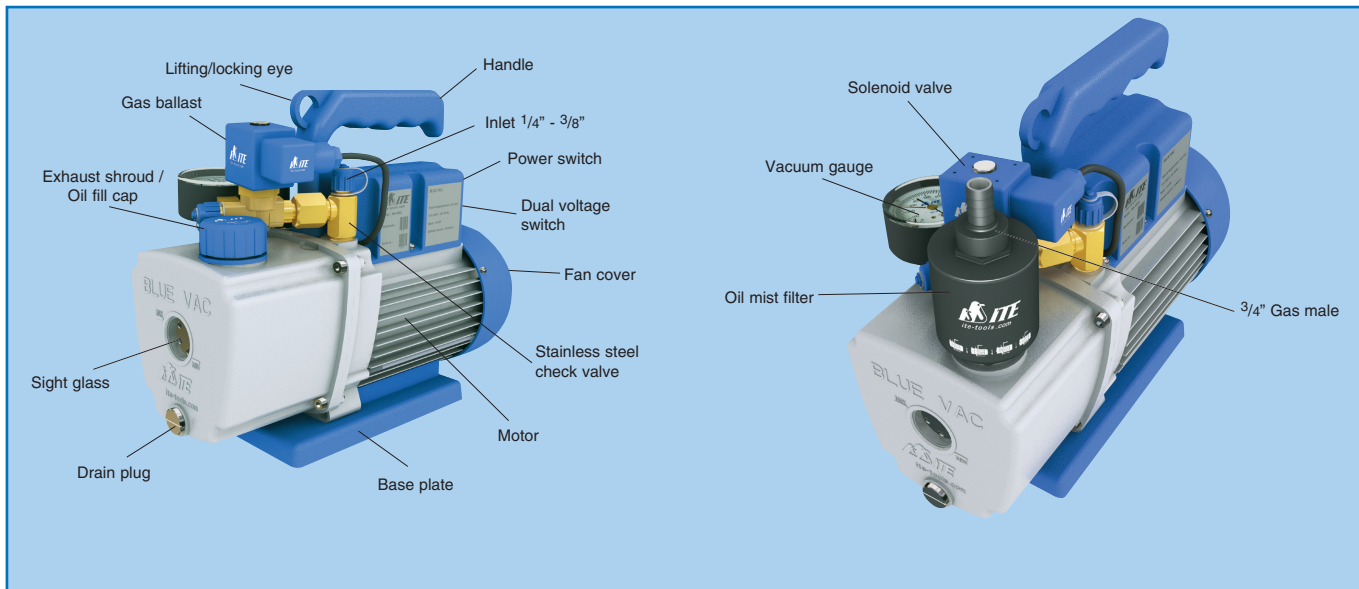