


“CAP TUBE” CAPILLARIES

- MV-2540** 2 times 1/4" FFL swivel hex nuts
 DOUBLE flared in each hex swivel nut.
 NO core depressor tip (for equilizing TXV's, etc...)
 Copper capillary length: 91 cm (36 inch).
NOTE: Please, use one US wrench for nuts.
- MV-2541** 2 times 1/4" FFL swivel hex nuts
 DOUBLE flared in each hex swivel nut.
 With 1 core depressor tip.
- MV-2542** 2 times 1/4" FFL swivel hex nuts
 DOUBLE flared in each hex swivel nut.
 With 2 core depressor tips.



FULL FORGED BRASS ACCESS TEES

- MV-1428** 1/4" MFL on the branch with core and cap with
 core-wrench remover
 x 1/8" MPT
 x 1/8" FPT in a full stationary hex body.
- MV-1438** 1/4" MFL on the branch with Teflon core and cap
 x 2 "in line" 1/8" MPT.

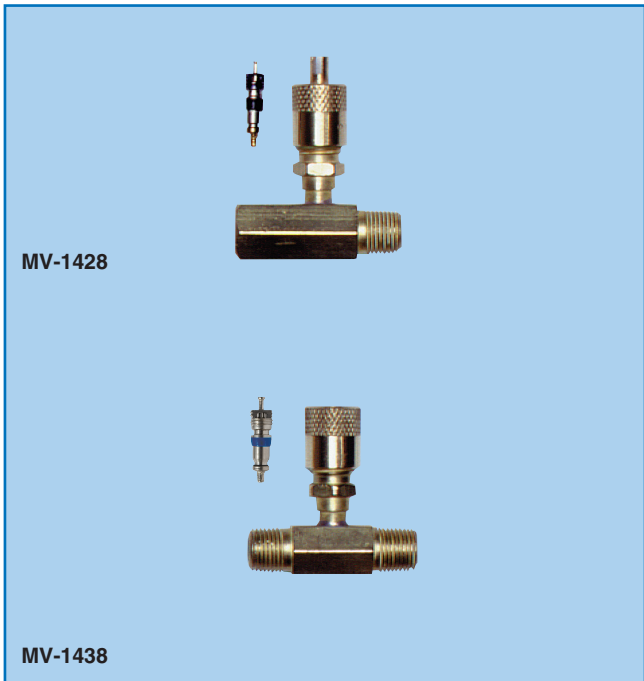

- MV-5044** 1/4" MFL (free, threaded for core) (1)
 x 1/4" FFL (swivel thumbscrew WITH seal, without core
 depressor) (free, threaded for core) (2)
 x 1/4" MFL (3).

- MV-2613** 2 times "in line" 1/4" FFL (1) (2)
 with 2 swivel nuts with seal and NO core depressor
 x 1/4" MFL with NO valve or core (3).

