


**Z-series  
ZDU 10/3AN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

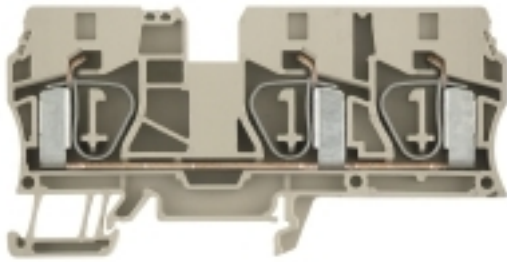

Terminal blocks in tension clamp system and the Z Series are specially customised to the customers' requirements. Less space, spacious labelling area, integrated test point, cross-connection functionality within the Z Series and another family of terminals by Weidmüller. Z-Series terminals have a large clamping range and one or two cross-connection slots. Plug-in standard cross-connections enable potentials to be distributed over any number of terminals.

**General ordering data**

Type	ZDU 10/3AN
Order No.	<a href="#">1767690000</a>
Version	Z-series, Feed-through terminal, Rated cross-section: 10 mm <sup>2</sup> , Tension clamp connection, Wemid, Beige
GTIN (EAN)	4032248122745
Qty.	20 pc(s).

**Z-series  
ZDU 10/3AN**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	10.1 mm	Height	99 mm
Height of lowest version	50.5 mm	Depth	49.5 mm
Net weight	37.024 g		

**Temperatures**

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

**Rated data IECEx/ATEX**

Certificate No. (ATEX)	KEMA00ATEX2107U	ATEX certificate	KEMA00ATEX2107U_d.pdf
ATEX certificate	KEMA00ATEX2107U_e.pdf	IEC Ex certificate	IECExULDO5.0009U_e.pdf
Max. voltage (ATEX)	550 V	Current (ATEX)	50 A
Wire cross section max. (ATEX)	10 mm <sup>2</sup>	Voltage, cross-connection	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
Marking ATEX Directive 94/9/EC	II 2 G D		Ex e II

**Additional technical data**

Explosion-tested version	Yes	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Tension-clamp connection, for plug-in cross-connector, One end without connector		

**CSA ratings data**

Certificate No. (CSA)	200039-1152892	Voltage size B (CSA)	600 V
Voltage size C (CSA)	600 V	Voltage size D (CSA)	600 V
Current size B (CSA)	55 A	Current size C (CSA)	55 A
Current size D (CSA)	5 A	Wire cross section max. (CSA)	6 AWG
Wire cross section min. (CSA)	16 AWG		

**Clampable wires (additional connection)**

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	1.5 mm <sup>2</sup>	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	10 mm <sup>2</sup>
---	---------------------	---	--------------------

**Z-series  
ZDU 10/3AN**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Clampable wires (rated connection)**

Type of connection	Tension clamp connection	Stripping length	18 mm
Blade size	1.0 x 5.5 mm	Connection direction	top
Number of connections	3	Clamping range, rated connection, min.	1.31 mm <sup>2</sup>
Clamping range, rated connection, max.	16 mm <sup>2</sup>	Gauge to IEC 60947-1	A6
Wire connection cross section, solid core, min. rated connection	1.5 mm <sup>2</sup>	Wire connection cross section, solid core max. rated connection	16 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, max.	16 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	10 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	1.5 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	10 mm <sup>2</sup>
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	10 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 16	Wire connection cross section AWG, max.	AWG 6

**Dimensions**

TS 35 offset	62.5 mm
--------------	---------

**Rated data**

Rated cross-section	10 mm <sup>2</sup>	Rated voltage	800 V
Rated impulse withstand voltage	8 kV	Rated current	57 A
Current at maximum wires	57 A	Standards	IEC 60947-7-1
Pollution severity	3		

**UL ratings data**

Certificate No. (UR)	E60693	Voltage size C (UR)	600 V
Current size C (UR)	60 A	Conductor size Factory wiring max. (UR)	6 AWG
Conductor size Factory wiring min. (UR)	16 AWG	Conductor size Field wiring max. (UR)	6 AWG

**Material data**

Insulating material	Wemid	Material	Wemid
Colour	Dark Beige	UL 94 flammability rating	V-0

**System specifications**

Product family	Z-series	Type of connection	Tension clamp connection
Connection direction	top	Number of levels	1
Number of connections	3	No. of clamping points per level	3
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

**Classifications**

ETIM 3.0	EC000897	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-20	eClass 6.2	27-14-11-20
eClass 7.1	27-14-11-20		

**Data sheet****Z-series  
ZDU 10/3AN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Product information**

Descriptive text ordering data	1000 VDC rated voltage tested.
Descriptive text technical data	Cross-connection of ZDU 10 and ZDU 16 is possible using the ZQV 16-10. Cross-connection of ZDU 10 and ZDU 35 is possible using the ZQV 35-10.

**Approvals**

Approvals



ROHS

Conform