


KRP 9/7

Reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

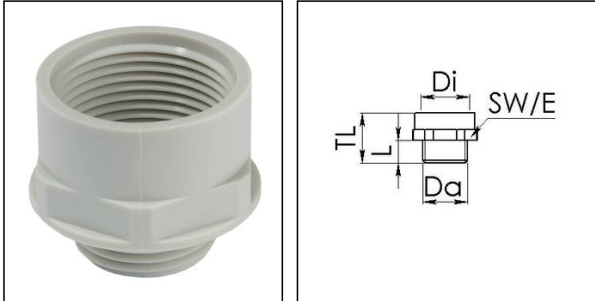

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	150 °C
Thread type outer	PG
Ø outer thread	9
Length screw-in thread L	9 mm
Thread type inner	PG
Connection thread size, inner	7
Length internal thread	15,5 mm
Total length TL	27 mm
Key width SW	20 mm
collar diameter (E)	22 mm
Form	A
Product Color	RAL 7035
Order no. RAL 7035	10063604
Type	KRP 9/7
Packing unit	100
ETIM-Classification	EC000938

Recommended accessories

MUG 9	10060671
ADR 9	10061420

30.09.2014