


## MRM 20/12

Reduction adaptor, brass



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

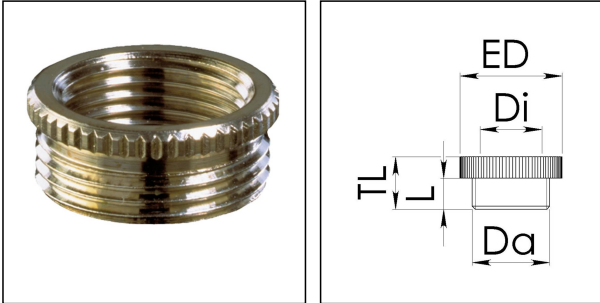

<b>Material</b>	Brass nickel-plated
<b>Temp. range min</b>	-200 °C
<b>Temp. range max</b>	250 °C
<b>Thread type outer</b>	M
<b>Ø outer thread</b>	20
<b>Lead outer</b>	1,5
<b>Length screw-in thread L</b>	6 mm
<b>Thread type inner</b>	M
<b>Connection thread size, inner</b>	12
<b>Lead inner</b>	1,5
<b>External diameter ED</b>	24 mm
<b>Total length TL</b>	8,5 mm
<b>Surface</b>	Nickel-plated
<b>Order no. nickel-plated</b>	10063941
<b>Type</b>	MRM 20/12
<b>Packing unit</b>	100
<b>ETIM-Classification</b>	EC000938

Recommended accessories

<b>EMMU 20</b>	10063143
<b>ORD-E 20 + PG11</b>	10064699

19.11.2014