


MRM 50/32

Reduction adaptor, brass



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

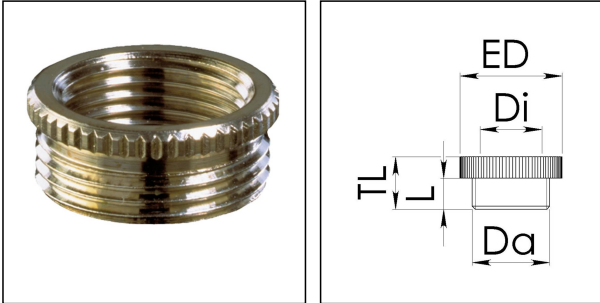

Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	50
Lead outer	1,5
Length screw-in thread L	9 mm
Thread type inner	M
Connection thread size, inner	32
Lead inner	1,5
External diameter ED	55 mm
Total length TL	12,5 mm
Surface	Nickel-plated
Order no. nickel-plated	10063949
Type	MRM 50/32
Packing unit	10
ETIM-Classification	EC000938

Recommended accessories

EMMU 50	10063147
ODR-E 50	10064703

19.11.2014