


## ESKV 63

Cable gland, polyamide with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

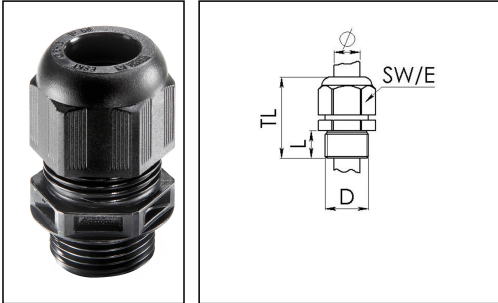

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 68, 5 bar 30 min, IP 69K
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Glow wire test	750 °C
Thread type	M
Connection thread size D	63
Lead	1,5
Length screw-in thread L	15 mm
Cable diameter min	34 mm
Cable diameter max	48 mm
Cable Diameter UL	38,1 mm - 47,5 mm
Key width SW	68 mm
Collar diameter (E)	75 mm
Total length TL	64 mm - 78 mm
Type of cable anchorage	A
Install. torques fitting	30 N m
Impact category	5
Install. torques cap nut	30 N m
Advice	VDE - Approval: -20°C - 100°C, , *Without VDE-approval
Product Color	RAL 9005
Type	ESKV 63
Order no. RAL 9005	10066127

Packing unit

3

ETIM-Classification

EC000441

Recommended accessories

<b>EMUG 63</b>	10060777
<b>RDE 63</b>	10062189
<b>EADR 63</b>	10062808
<b>BS 38</b>	10064018
<b>MFD 63/01/131-01/118-03/084-02/064</b>	10101114
<b>MFD 63/03/065</b>	10101201
<b>MFD 63/02/065-01/090</b>	10101223

11.12.2014