


SKVS 7

Cable gland with bend protection, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

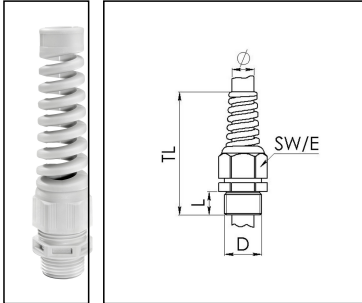

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 68, 5 bar 30 min, IP 69K
Temp. range min	-20 °C
Temp. range max	80 °C
Intermittent temp. range	100 °C
Glow wire test	750 °C
Thread type	PG
Connection thread size D	7
Length screw-in thread L	8 mm
Cable diameter min	3 mm
Cable diameter max	6,5 mm
Key width SW	15 mm
Collar diameter (E)	17 mm
Total length TL	68 mm
Type of cable anchorage	A
Product Color	RAL 7035
Type	SKVS 7
Order no. RAL 7035	10060615
Packing unit	100
ETIM-Classification	EC000441

Recommended accessories

MUG 7	10060670
ADR 7	10061419
RDE 12	10062183
BS 3	10064001
BS 6	10064004
MFD 12/04/020	10064392
MFD 12/02/020	10100525

11.12.2014