


SKVS 13,5

Cable gland with bend protection, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

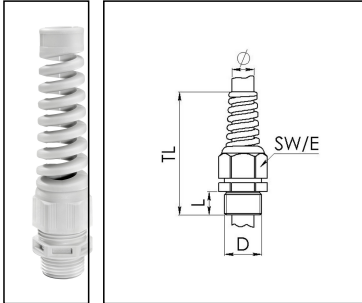

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 68, 5 bar 30 min, IP 69K
Temp. range min	-20 °C
Temp. range max	80 °C
Intermittent temp. range	100 °C
Glow wire test	750 °C
Thread type	PG
Connection thread size D	13,5
Length screw-in thread L	9 mm
Cable diameter min	6 mm
Cable diameter max	12 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Total length TL	105 mm
Type of cable anchorage	A
Product Color	RAL 7035
Type	SKVS 13,5
Order no. RAL 7035	10060618
Packing unit	25
ETIM-Classification	EC000441

Recommended accessories

MFD 25/02/060	10060452
MUG 13,5	10060673
RDE 25	10060768
MFD 25/02/080	10060952
MFD 25/01/065	10060954
ADR 13,5	10061422
MFD 25/02/070	10063995
BS 12	10064009
BS 17	10064012
MFD 25/03/070	10064342
MFD 25/04/060	10064343
MFD 25/01/090	10101016
MFD 25/01/105-01/055	10101255
MFD 25/05/056	10102023

11.12.2014