


SKVS 16

Cable gland with bend protection, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

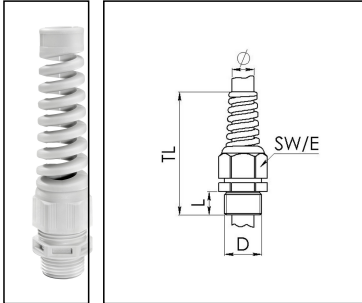

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 68, 5 bar 30 min, IP 69K
Temp. range min	-20 °C
Temp. range max	80 °C
Intermittent temp. range	100 °C
Glow wire test	750 °C
Thread type	PG
Connection thread size D	16
Length screw-in thread L	10 mm
Cable diameter min	10 mm
Cable diameter max	14 mm
Key width SW	27 mm
Collar diameter (E)	30 mm
Total length TL	119 mm
Type of cable anchorage	A
Product Color	RAL 7035
Type	SKVS 16
Order no. RAL 7035	10060619
Packing unit	25
ETIM-Classification	EC000441

Recommended accessories

MUG 16	10060674
ADR 16	10061423
RDE 32	10062186
BS 12	10064009
BS 17	10064012
MFD 32/04/070	10064344
MFD 32/06/060	10064345
MFD 32/04/080	10064950
MFD 32/03/080	10101018
MFD 32/05/070	10101140
MFD 32/01/115-01/085	10101256
MFD 32/03/065	10102169
MFD 32/03/090	10102170

11.12.2014