


## CLIXX 16

Membrane cable entrie with strain relief



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

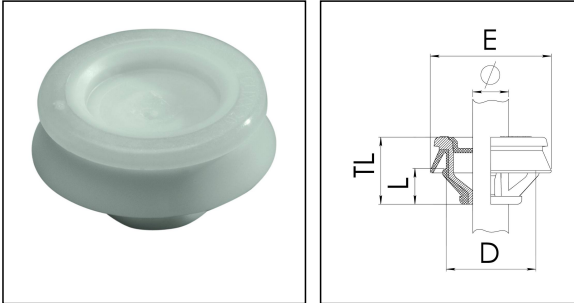

<b>Material</b>	Polypropylene
<b>Material membrane</b>	TPE
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	65 °C
<b>Protection class</b>	IP 66/67
<b>Connection thread size D</b>	16
<b>Cable diameter min</b>	4 mm
<b>Cable diameter max</b>	10 mm
<b>Total length TL</b>	15 mm
<b>Drilling diameter</b>	16,7 mm
<b>Wall thickness</b>	0,8 mm - 3,5 mm
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	10101861
<b>Type</b>	CLIXX 16
<b>Packing unit</b>	50
<b>ETIM-Classification</b>	EC000451

11.12.2014