


EMS 20

Membrane-screw



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

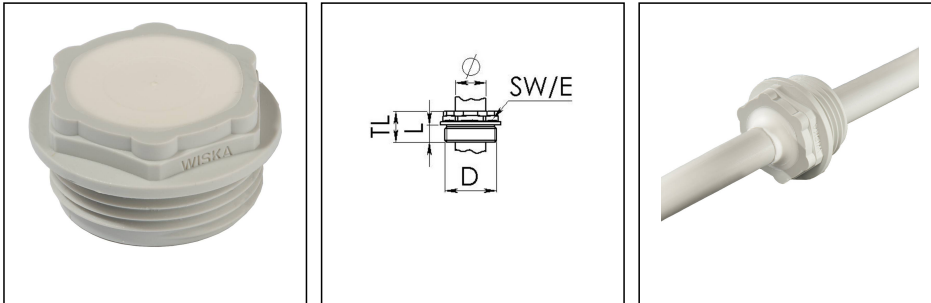

Material	Polypropylene
Material membrane	TPE
Temp. range min	-30 °C
Temp. range max	80 °C
Intermittent temp. range	100 °C
Protection class	IP 66
Thread type	M
Connection thread size D	20
Lead	1,5
Length screw-in thread L	9 mm
Cable diameter min	1 mm
Cable diameter max	13 mm
Key width SW	20 mm
Collar diameter (E)	24 mm
Total length TL	15 mm
Product Color	RAL 7035
Order no. RAL 7035	10062568
Type	EMS 20
Packing unit	100
ETIM-Classification	EC000451

Recommended accessories

EMUG 20

10060772

11.12.2014