
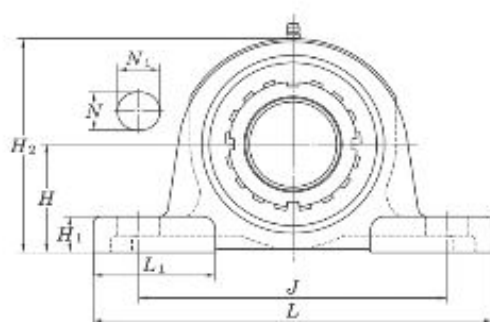




dimensions											bolt size		load ratings (N)				weight
SAP	type	Ø d 1	H	L	J	A	N	N1	H1	H2	B1	mm	dyn.C	stat.C0	bearing+sleeve	housing	kg
ANR051	UKP205	20	36,5	140	105	38	13	19	15	71	35	M10	13300	7457	UK205+H2305	P205	0,86
ANR052	UKP206	25	42,9	165	121	48	17	20	17	84	38	M14	18525	10735	UK206+H2306	P206	1,28
ANR053	UKP207	30	47,6	167	127	48	17	20	18	93	43	M14	24415	14630	UK207+H2307	P207	1,67
ANR054	UKP208	35	49,2	184	137	54	17	20	18	100	46	M14	27645	16910	UK208+H2308	P208	1,99
ANR055	UKP209	40	54	190	146	54	17	20	20	106	50	M14	32395	20235	UK209+H2309	P209	1,29
ANR056	UKP210	45	57,2	206	159	60	20	23	21	113	55	M16	33345	22135	UK210+H2310	P210	2,83
ANR057	UKP211	50	63,5	219	171	60	20	23	23	125	59	M16	41230	27930	UK211+H2311	P211	3,46
ANR058	UKP212	55	69,8	241	184	70	20	23	25	138	62	M16	49780	34390	UK212+H2312	P212	4,95
ANR059	UKP213	60	76,2	265	203	70	25	28	27	150	65	M20	54340	38095	UK213+H2313	P213	5,06
ANR060	UKP215	65	82,6	275	217	74	25	28	28	162	73	M20	64030	45885	UK215+H2315	P215	7,27
ANR061	UKP216	70	88,9	292	232	78	25	28	30	174	78	M20	69065	50350	UK216+H2316	P216	8,36
ANR062	UKP217	75	95,2	310	247	83	25	28	32	185	82	M20	79800	58805	UK217+H2317	P217	10,23
ANR063	UKP218	80	102	327	262	88	27	30	33	198	86	M22	91295	67925	UK218+H2318	P218	12,34

* = huomio: kartioholkki myydään aina erkiseen

* = note: adapter sleeve is always sold separately