
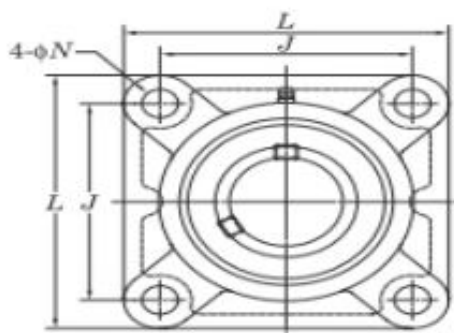


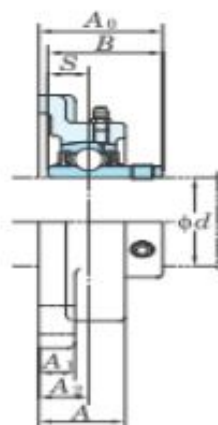

type		Dimensions										bolt size	load ratings (N)		bearing	housing	weight
SAP		∅ d	L	J	A2	A1	A	4-∅N	A0	B	S	mm	dyn.	stat.			
ANR003	UCF305	25	110	80	16	13	29	16	39	38	15	M14	20140	10355	UC305	F305	1,1
ANR004	UCF306	30	125	95	18	15	32	16	44	43	17	M14	25365	14250	UC306	F306	1,6
ANR005	UCF307	35	135	100	20	16	36	19	49	48	19	M16	31730	18335	UC307	F307	2
ANR006	UCF308	40	150	112	23	17	40	19	56	52	19	M16	38665	22800	UC308	F308	2,7
ANR007	UCF309	45	160	125	25	18	44	19	60	57	22	M16	46455	28025	UC309	F309	3,4
ANR008	UCF310	50	175	132	28	19	48	23	67	61	22	M20	58900	36385	UC310	F310	4,5
ANR009	UCF311	55	185	140	30	20	52	23	71	66	25	M20	68020	42750	UC311	F311	5,5
ANR010	UCF312	60	195	150	33	22	56	23	78	71	26	M20	77805	49590	UC312	F312	6,5
ANR011	UCF313	65	208	166	33	22	58	23	78	75	30	M20	88065	56905	UC313	F313	7,9
ANR012	UCF314	70	226	178	36	25	61	25	81	78	33	M22	98800	64790	UC314	F314	9,5
ANR013	UCF315	75	236	184	39	25	66	25	89	82	32	M22	107350	73340	UC315	F315	12
ANR014	UCF316	80	250	196	38	27	68	31	90	86	34	M27	116850	82365	UC316	F316	14
*	UCF317	85	260	204	44	27	74	31	100	96	40	M27	126350	91960	UC317	F317	16
ANR015	UCF318	90	280	216	44	30	76	35	100	96	40	M30	135850	101650	UC318	F318	19
*	UCF319	95	290	228	59	30	94	35	121	103	41	M30	145350	113050	UC319	F319	22
ANR016	UCF320	100	310	242	59	32	94	38	125	108	42	M33	164350	133950	UC320	F320	25
*	UCF321	105	310	242	59	32	94	38	127	-	44	M33	174800	145350	UC321	F321	25,6
ANR017	UCF322	110	340	266	60	35	96	41	131	-	46	M36	194750	171000	UC322	F322	34,7
ANR018	UCF324	120	370	290	65	40	110	41	140	-	51	M36	196650	175750	UC324	F324	47,2
*	UCF326	130	410	320	65	45	115	41	146	-	54	M36	217550	203300	UC326	F326	62,7
*	UCF328	140	450	350	75	55	125	41	161	-	59	M36	240350	233700	UC328	F328	87