
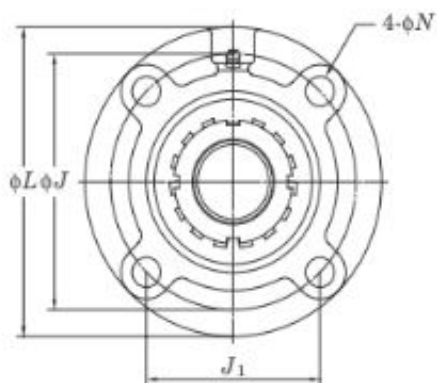


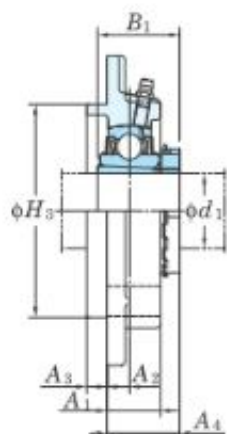

SAP	type	dimensions											bolt mm	load ratings(N)			housing	weight kg
		ød1	øL	øJ	J1	A2	4-øN	A3	A2	A1	øH3	A4		dyn.	stat.	bearing+sleeve		
ANR019	UKFC205	20	115	90	63,6	10	12	6	7	21	70	30	M10	13300	7457	UK205+*H2305	FC205	1,05
ANR020	UKFC206	25	125	100	70,7	10	12	8	8	23	80	31	M10	18525	10735	UK206+*H2306	FC206	1,34
ANR021	UKFC207	30	135	110	77,8	11	14	8	9	26	90	34	M12	24415	14630	UK207+*H2307	FC207	1,9
ANR022	UKFC208	35	145	120	84,8	11	14	10	9	26	100	36	M12	27645	16910	UK208+*H2308	FC208	2,24
ANR023	UKFC209	40	160	132	93,3	10	16	12	14	26	105	36	M14	32395	20235	UK209+*H2309	PFC209	2,83
ANR024	UKFC210	45	165	138	97,6	10	16	12	14	28	110	38	M14	33345	22135	UK210+*H2310	FC210	3,07
ANR025	UKFC211	50	185	150	106	13	19	12	15	31	125	42	M16	41230	27930	UK211+*H2311	FC211	4,16
ANR026	UKFC212	55	195	160	113	17	19	12	15	36	135	48	M16	49780	34390	UK212+*H2312	FC212	4,99
ANR027	UKFC213	60	205	170	120	16	19	14	15	36	145	49	M16	54340	38095	UK213+*H2313	FC213	5,56
ANR028	UKFC215	65	220	184	130	18	19	16	18	40	160	54	M16	64030	45885	UK215+*H2315	FC215	7,67
ANR070	UKFC216	70	240	200	141	18	23	16	18	42	170	57	M20	69065	50350	UK216+*H2316	FC216	9,41
*	UKFC217	75	250	208	147	18	23	18	20	45	180	59	M20	79800	58805	UK217+*H2317	FC217	11,23
ANR071	UKFC218	80	265	220	156	22	23	18	20	50	190	65	M20	91295	67925	UK218+*H2318	FC218	13,34

* = huomio: kartioholkki myydään aina erkiseen

* = note: adapter sleeve is always sold separately