
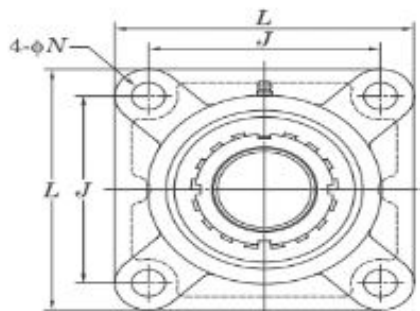


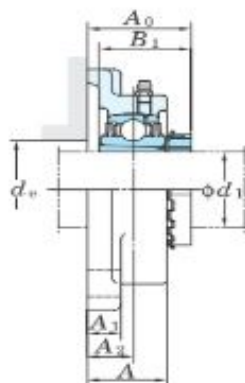

SAP	type	Ød1	dimensions							bolt size mm	load ratings(N)		bearing+sleeve	housing	weight kg
			L	J	A2	A1	A	4-φN	A0		dyn. C	stat. C0			
*	UKF305	20	110	80	16	13	29	16	37	M14	20140	10355	UK305+H2305	F305	1,4
*	UKF306	25	125	95	18	15	32	16	40,5	M14	25365	14250	UK306+H2306	F306	1,9
*	UKF307	30	135	100	20	16	36	19	44,5	M16	31730	18335	UK307+H2307	F307	2,3
*	UKF308	35	150	112	23	17	40	19	50	M16	38665	22800	UK308+H2308	F308	3,1
ANR072	UKF309	40	160	125	25	18	44	19	54,5	M16	46455	28025	UK309+H2309	F309	4,1
ANR073	UKF310	45	175	132	28	19	48	23	60	M20	58900	36385	UK310+H2310	F310	5,1
ANR074	UKF311	50	185	140	30	20	52	23	63,5	M20	68020	42750	UK311+H2311	F311	5,9
ANR075	UKF312	55	195	150	33	22	56	23	69	M20	77805	49590	UK312+H2312	F312	6,8
ANR077	UKF315	65	236	184	39	25	66	25	81	M22	107350	73340	UK315+H2315	F315	11,7
ANR078	UKF316	70	250	196	38	27	68	31	83,5	M27	116850	82365	UK316+H2316	F316	12,9
ANR079	UKF317	75	260	204	44	27	74	31	92	M27	126350	91960	UK317+H2317	F317	15,2
ANR080	UKF318	80	280	216	44	30	76	35	93,5	M30	135850	101650	UK318+H2318	F318	19
*	UKF319	85	290	228	59	30	94	35	111	M30	145350	113050	UK319+H2319	F319	21,9
ANR081	UKF320	90	310	242	59	32	94	38	115	M33	164350	133950	UK320+H2320	F320	25,4
*	UKF322	100	340	266	60	35	96	41	121	M36	194750	171000	UK322+H2322	F322	35,2
*	UKF324	110	370	290	65	40	110	41	130	M36	196650	175750	UK324+H2324	F324	47,6
*	UKF326	115	410	320	65	45	115	41	134	M36	217550	203300	UK326+H2326	F326	65,3
*	UKF328	125	450	350	75	55	125	41	148	M36	240350	233700	UK328+H2328	F328	93,4

* = huomio: kartioholkki myydään aina erkiseen

* = note: adapter sleeve is always sold separately