
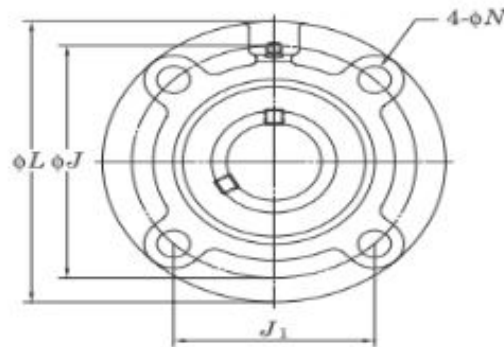


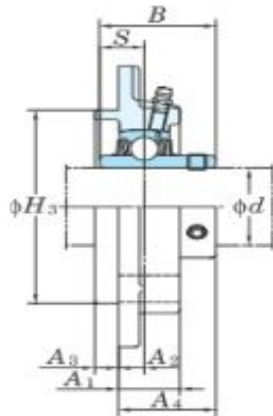

type		dimensions											bolt	Loads ratings(N)					weight
SAP		ød	øL	øJ	J1	A2	4-øN	A3	A2	A1	øH3	A4	S	mm	dyn. C	stat.C0	bearing	housing	kg
*	UCFC201	12	100	78	55,1	10	12	5	7	20,5	62	28,3	12,7	M10	12160	6318	UC201	FC204	0,73
ANQ953	UCFC202	15	100	78	55,1	10	12	5	7	20,5	62	28,3	12,7	M10	12160	6318	UC202	FC204	0,72
ANQ954	UCFC203	17	100	78	55,1	10	12	5	7	20,5	62	28,3	12,7	M10	12160	6318	UC203	FC204	0,71
ANQ955	UCFC204	20	100	78	55,1	10	12	5	7	20,5	62	28,3	12,7	M10	12160	6318	UC204	FC204	0,69
ANQ956	UCFC205	25	115	90	63,6	10	12	6	7	21	70	29,8	14,3	M10	13300	7457	UC205	FC205	1
ANQ957	UCFC206	30	125	100	70,7	10	12	8	8	23	80	32,2	15,9	M10	18525	10735	UC206	FC206	1,3
ANQ958	UCFC207	35	135	110	77,8	11	14	8	9	26	90	36,4	17,5	M12	24415	14630	UC207	FC207	1,81
ANQ959	UCFC208	40	145	120	84,8	11	14	10	9	26	100	41,2	19	M12	27645	16910	UC208	FC208	2,14
ANQ960	UCFC209	45	160	132	93,3	10	16	12	14	26	105	40,2	19	M14	32395	20235	UC209	FC209	2,68
ANQ961	UCFC210	50	165	138	97,6	10	16	12	14	28	110	42,6	19	M14	33345	22135	UC210	FC210	2,9
ANQ962	UCFC211	55	185	150	106,1	13	19	12	15	31	125	46,4	22,2	M16	41230	27930	UC211	FC211	4,01
ANQ963	UCFC212	60	195	160	113,1	17	19	12	15	36	135	56,7	25,4	M16	49780	34390	UC212	FC212	4,94
ANQ964	UCFC213	65	205	170	120,2	16	19	14	15	36	145	55,7	25,4	M16	54340	38095	UC213	FC213	5,65
ANQ965	UCFC214	70	215	177	125,1	17	19	14	18	40	150	61,4	30,2	M16	59090	41895	UC214	FC214	6,95
ANQ966	UCFC215	75	220	184	130,1	18	19	16	18	40	160	62,5	33,3	M16	64030	45885	UC215	FC215	7,56
ANQ967	UCFC216	80	240	200	141,4	18	23	16	18	42	170	67,3	33,3	M20	69065	50350	UC216	FC216	9,15
ANQ968	UCFC217	85	250	208	147,1	18	23	18	20	45	180	69,6	34,1	M20	79800	58805	UC217	FC217	10,81
ANQ969	UCFC218	90	265	220	155,5	22	23	18	20	50	190	78,3	39,7	M20	91295	67925	UC218	FC218	12,96