


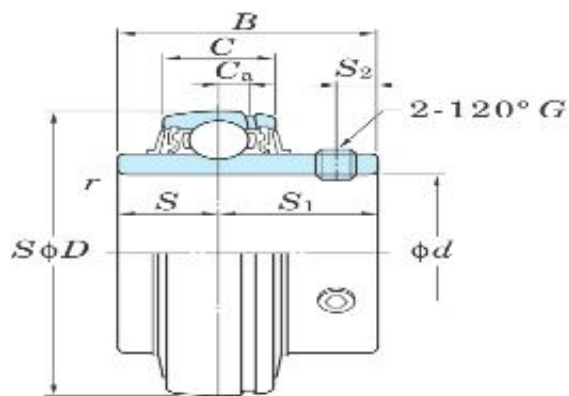

SAP	type	dimensions								load ratings (N)		weight kg
		ϕd	$S \phi D$	B	C	S	S1	S2	2-120°G	dynamic	static	
*	UC305	25	62	38	20	15	23	6	M6x1	20140	10355	0,35
ANQ882	UC306	30	72	43	23	17	26	6	M6x1	25365	14250	0,56
ANQ883	UC307	35	80	48	25	19	29	8	M8x1	31730	18335	0,71
ANQ884	UC308	40	90	52	27	19	33	10	M10x1	38665	22800	0,96
ANQ885	UC309	45	100	57	30	22	35	10	M10x1	46455	28025	1,28
ANQ886	UC310	50	110	61	32	22	39	12	M12x1,5	58900	36385	1,65
ANQ887	UC311	55	120	66	34	25	41	12	M12x1,5	68020	42750	2,07
ANQ888	UC312	60	130	71	36	26	45	12	M12x1,5	77805	49590	2,6
ANQ889	UC313	65	140	75	38	30	45	12	M12x1,5	88065	56905	3,25
ANQ890	UC314	70	150	78	40	33	45	12	M12x1,5	98800	64790	3,89
ANQ891	UC315	75	160	82	42	32	50	14	M14x1,5	107350	73340	4,72
ANQ892	UC316	80	170	86	44	34	52	14	M14x1,5	116850	82365	5,55
*	UC317	85	180	96	46	40	56	16	M16x1,5	126350	91960	6,67
ANQ893	UC318	90	190	96	48	40	56	16	M16x1,5	135850	101650	7,56
*	UC319	95	200	103	50	41	62	16	M16x1,5	145350	113050	8,7
*	UC320	100	215	108	55	42	66	18	M18x1,5	164350	133950	10,8
*	UC321	105	225	112	56	44	68	18	M18x1,5	174800	145350	12,2
*	UC322	110	240	117	60	46	71	18	M18x1,5	194750	171000	14,3
*	UC324	120	260	126	64	51	75	18	M18x1,5	196650	175750	18,5
*	UC326	130	280	135	68	54	81	20	M20x1,5	217550	203300	23
*	UC328	140	300	145	73	59	86	22	M20x1,5	240350	233700	28,5