



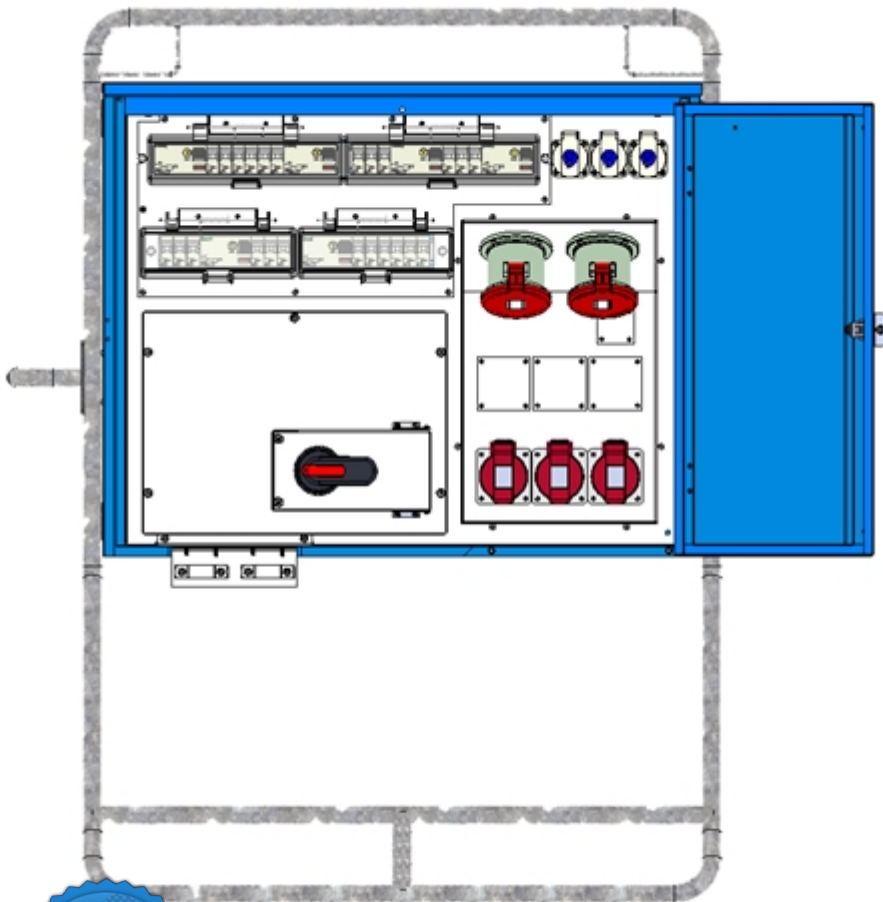

*\* Now we provide a 5 year guarantee on the purchase of new El-Björn products. Go to our homepage to sign up.*

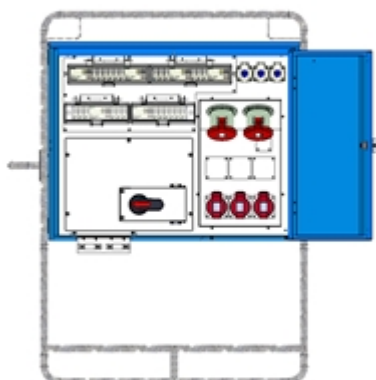


# Product arguments

- Enclosure in powder coated, corrosion-resistant galvanized sheet steel
- Hot-dip galvanized frame with forklift truck eyes
- Hinges and outer screws of stainless steel
- Connection of incoming cable is permanent to a terminal block, 4 or 5-conductor systems
- The outlet sockets are preceded by an earth-fault breaker and fuse protected with a miniature circuit breaker type C-characteristic

Article No.: E2467208

Replaces: E1991004

Type: SF 125//3122-302 EN SEFI

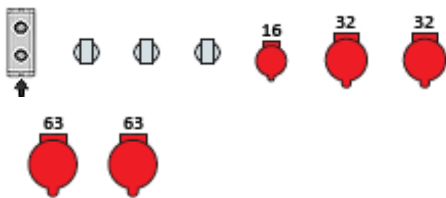

Certifications:



## Technical Data, SF 125//3122-302 EN SEFI

Incoming Connectable area Al/Cu 2x16-120 mm<sup>2</sup>

Incoming Fuse-switch NH00 125 A

Outgoing 2-pol/230V 16A Schuko Type F 3 pcs

Outgoing 5-pol/400V 16A CEE 416-6 1 pcs

Outgoing 5-pol/400V 32A CEE 432-6 2 pcs

Outgoing 5-pol/400V 63A CEE 463-6 2 pcs

RCD 0,03A 3 pcs

RCD 0,3A 2 pcs

Dimensions H x W x D (mm) 1115 x 860 x 700 mm

Short-circuit strength lcf 17 kA

Protection class IP44