



** Now we provide a 5 year guarantee on the purchase of new El-Björn products. Go to our homepage to sign up.*

Final power distribution centres




Product arguments

- Enclosure in powder coated, corrosion-resistant galvanized sheet steel
- Frame and lifting eyes are hot-dip galvanized
- Hinges and outer screws of stainless steel
- The frame is designed for pallets and truck transport

Article No.: E2467214

Replaces: E1988059

Type: U/SF 63//3321-401 EN
SEFI FUC

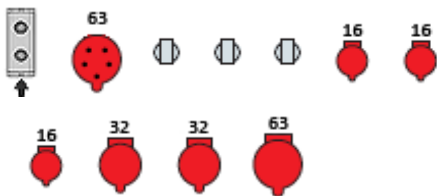

Certifications:



Technical Data, U/SF 63//3321-401 EN SEFI FUC

Incoming Connectable area Al/Cu 2x16-95 mm²

Incoming Main fuse DIII 63 A

Incoming 5-pol/400V 63A CEE 463-6 1 pcs

Outgoing 2-pol/230V 16A Schuko Type F 3 pcs

Outgoing 5-pol/400V 16A CEE 416-6 3 pcs

Outgoing 5-pol/400V 32A CEE 432-6 2 pcs

Outgoing 5-pol/400V 63A CEE 463-6 1 pcs

RCD 0,03A 4 pcs

RCD 0,3A 1 pcs

Weight 57,5 kg

Dimensions H x W x D (mm) 1115x860x700 mm

Short-circuit strength lcf 17 kA

Protection class IP44