

210mm

PHILIPS

Ledinaire
Surface Downlight

DN065C

CE

indoor



220V-240V

50Hz/60Hz

IP20

Max. 35°C
Min. 0°C

	10NC	Output (lm)	P (W)	A1	A2	B	
DN065C LED10S 830	9290020341	950	11	100	120-130	175	0.47
DN065C LED10S 840	9290020342	1000					
DN065C LED20S 830	9290020350	1900	23	100	120-130	225	0.70
DN065C LED20S 840	9290020351	2000					

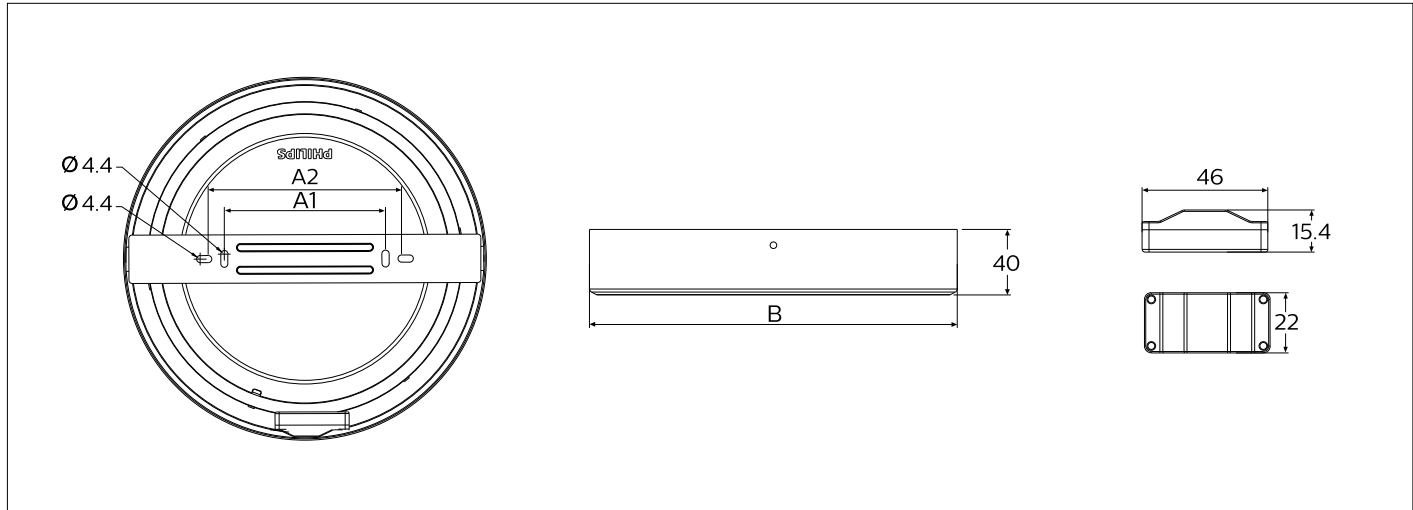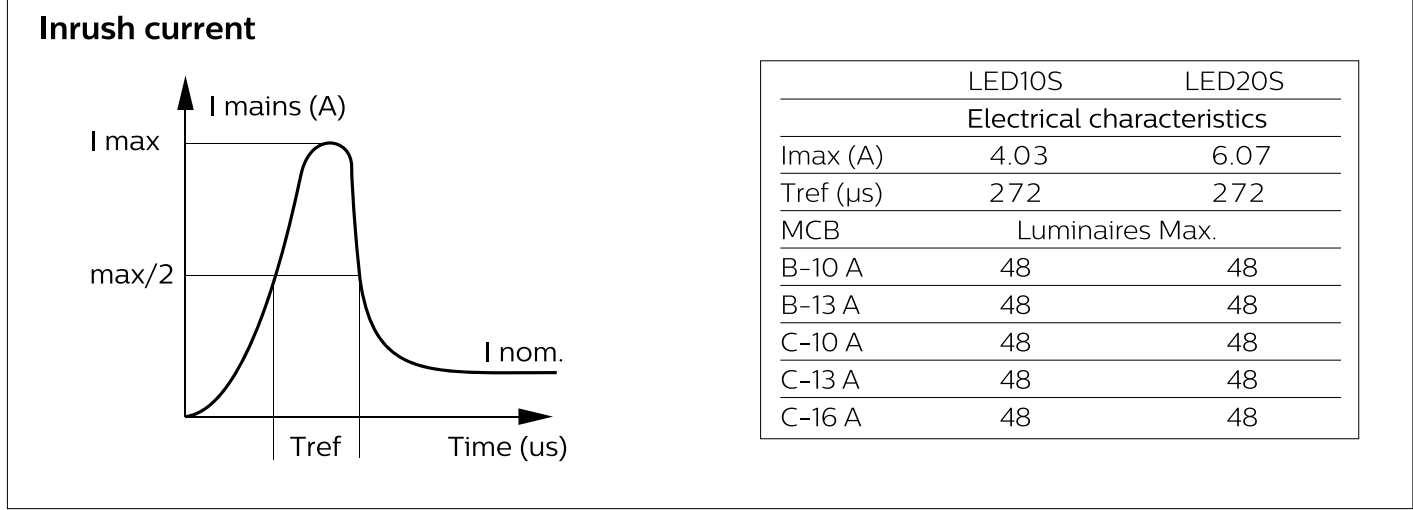

OFF

(2x)

1 (4x)

2 (4x)

18-22

7

N

L

60227 IEC52

Min. 2 x 0,75 mm²

Max. 2 x 1,00 mm²

Ø 6 - Ø 8 mm

ON

If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.
The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

DISCLAIMER:		
Please note that the original Artwork was not built by SGS. SGS only made change on specific content as listed in below. Therefore, SGS does not hold any responsibility for other content in this file. If you have any questions regarding the artwork, please contact with Philips Lighting PCC accordingly.		
Author/作者	Date/日期	Revision description/更改描述
honi	2019/12/06	add 12NC on leaflet
Steve	2019/12/11	change text in panel, remove empty box, copyright update to 2020

SIGNIFY

Brand PHILIPS

Product Family LUMINAIRES

Shape

Vattage N/a

Template Ref. NA

SGS number 5939294

12-NC.NBR 324165595671

Masterdrawing N/a

CRC Ref.

Barcode No. N/a

Operator(s) stevewo

VERSION No. v2

Date in 20150514

Date amended 20191213

Black

Diecut

Date Check

☐ Check briefing Traffic

Artwork document

☐ Legend

☐ 12NC

☐ Barcode

☐ Diecut

☐ Number of colors

☐ Trapping/Bleed

☐ Images hires

☐ Jobsizes

Approval

☐ QC Lithographer SGS Shanghai Production

☐ Product Manager bryce.du@signify.com

☐ Traffic Manager Sadie Shen