



All direction adjustable IP65 recessed spotlight

Obico



The Obico range combines high lumen efficacy with outstanding value and multiple options in a single luminaire: the range offers IP65 protection from water and steam as well as 360° adjustability, so you can direct the light in all directions, making it the preferred choice for installers and contractors that are looking for an all-in-one solution.

With a simple flick of a switch located on the driver, the colour temperature can be selected as 3000K or 4000K. The luminaire is compatible with trailing-edge and leading-

edge dimmers and comes with a loop-in, loop-out wiring system integrated in the driver to ensure a quick and simple installation.

A slim profile of 40mm makes Obico suitable for shallow ceiling voids. The luminaire can be covered with glass wool and mineral insulation material. The fire rated model is designed and tested to meet Fire Rating Standards (30, 60, 90-minute fire rated ceilings) for safety and reassurance: BS 476-21:1987.

Obico



Features

- Integrated adjustable LED accent downlight with IP65 protection from water and steam vapour, with high lumen efficacy
- Low-profile, only 40mm deep and loop-in, loop-out wiring terminal for quick and easy install
- Choice of 3000K (Warm White) or 4000K (Neutral White) with a simple flick of a switch on the driver
- Good colour rendering (CRI>80)
- Compatible with trailing-edge and leading-edge dimmers (phase dimming)
- Light output up to 740lm (4000K), efficacy up to 87lm/W
- 360° adjustability - point the light in all directions
- Light beam angle 38°
- 78mm cut-out
- Class II
- Air-proof, to limit air leakage when used in residential applications within the building's thermal envelope
- Directly coverable with insulation material according to EN60598-1
- Fire rated version designed and tested to meet Fire Rating Standards (30, 60, 90-minute fire rated ceilings) for safety and reassurance: BS 476-21:1987
- Fire rated model tested for 30 & 60 minute I-Joist ceiling system (TRUFloorsystems® by Staircraft)
- White bezel
- Lifetime: 50,000 hours at L70
- 5 years warranty

Product information

Code	Description	Colour Temperature (K)	Beam Angle (°)	Fixture Lumen (lm)	Total Power Consumption (W)	Luminaire Efficacy lm/W	Control Technology Type	Product Diameter (mm)	Cutout Dimensions (W x L in mm or Diameter in mm)	Average Life (hours)	Voltage (V)
Obico - IP65											
0005350	Obico IP65 740lm 2CCT DIM ADJ WHT	3000-4000	38	740	8.5	87	Phase DIM	96	78	50,000	220-240
Obico - IP65 Fire Rated											
0005352	Obico IP65 FIRE 740lm 2CCT DIM ADJ WHT	3000-4000	38	740	8.5	87	Phase DIM	96	78	50,000	220-240

Additional Images



0005350



0005350




0005352



0005352

Photometric Data

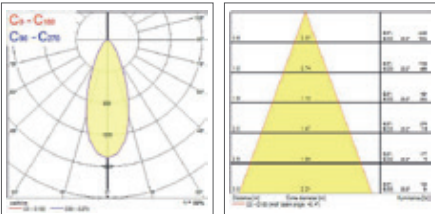

Dimensions (mm)

