FIBOX PICCOLO PC

170 X 80 X 85

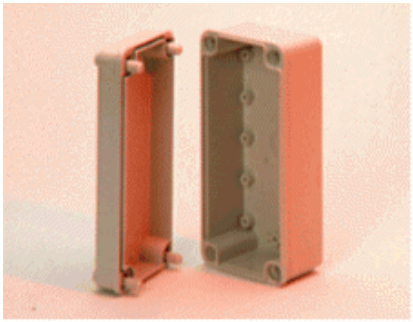

This is a sample photo.

ORDER SYMBOL: PC D 85 G

EL.number **EAN:** 6418074002136

Sweden: 2536817
Denmark: 8212001572
Finland: 3423411

INCLUDING:

Enclosure body, cover with PUR gasket, 4 cover screws, and mounting screws.

APPROVALS:

USA: UL Type 1, 4X, 12, 13 (E75645 Vol.1 Sec.3); UL 94-V2

EURO: IP 67; UL 94-V2

OTHERS: IEC 529, CE, EEI, FIMKO 197844-01, GL 94 513 HH, LR 90/00200 (E4), CSA LR 49336-8

FIBOX PICCOLO PC

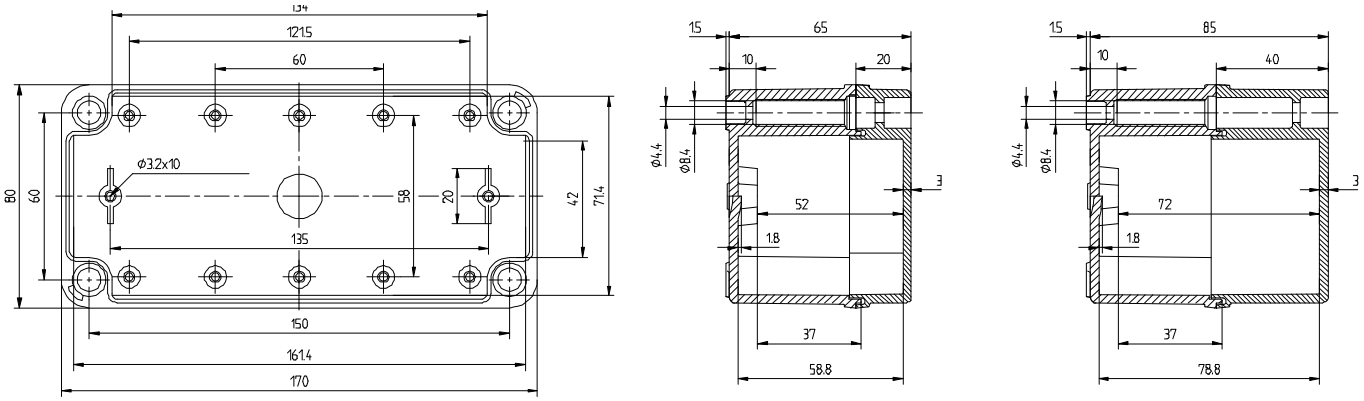

TECHNICAL INFORMATION:

Standard colour:	RAL 7035	Temp.range in cont. use:	Max. +80 °C
Ingress protection:	IP 67 (IEC 529)	Temp. range of material:	- 40 °C - + 120 °C
Flame resistance:	UL 94-V2		

ACCESSORIES

DIN-Rail	B-1	Fastening lug	FP 22040
DIN-Rail	B-3	Fastening lug	FP 22046
DIN-Rail	CHM-1	Screw	MB S-20KN
DIN-Rail	CHM-3	Screw	MB S-40KN
DIN-Rail	DH-1		
DIN-Rail	DH-3		
DIN-Rail	FM-1		
DIN-Rail	FM-3		

(c) FIBOX Oy Data subject to change without notice.