



**Screw connection 3p, standard, size 2**

**Part no.** NZM2-XKS  
**Catalog No.** 260030

**EL-Nummer (Norway)** 4358804

Similar to illustration

**Delivery program**

Number of conductors			3 pole
Accessories			Screw connection
Rated current	$I_n$	A	Cu 300, Al 250
For use with			NZM2, PN2, N(S)2

**Terminal capacities**

Type of conductor			
Cu/Al cable			Copper cable lugs Aluminium cable lug
Terminal capacities			
flexible		mm <sup>2</sup>	1 x 10 - 185 2 x 4 - 70 1 x 10 - 50 2 x 10 - 50
AWG/kcmil		mm <sup>2</sup>	1 x 11 - 3/0 2 x 12 1 x 8 - 1/0 2 x 8 - 1/0

**Terminal capacities**

Cu strip (number of segments x width x segment thickness)		mm <sup>2</sup>	≥ 2 x 16 x 0.8
Copper busbar width x thickness	Width	mm	≥ 16 x 5

**Notes**

- Type contains parts for 3 or 4-pole switches on top or bottom of switch.
- Standard connection with all NZM2, PN2 and N2 circuit-breakers.
- Conversion kit for circuit-breaker with box terminal.
- Use only specialized cable lugs with a narrow design; see NZM\*XKS\* types. Otherwise, NZM\*XKP phase disconnectors must be used, even for insulated cable lugs.
- Fitted within the switch housing.
- If a busbar is used, insulation (400 mm) e.g sleeving and a NZM2(-4)-XKSA cover are required.
- $U_g \geq 525$  V AC:
  - Bei allen anderen Anschlussmaterialien, z.B. Kabel, Bänder, ist eine Abdeckung NZM2(-4)-XKSA zu verwenden.

**Design verification as per IEC/EN 61439**

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.

10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 8.0

Low-voltage industrial components (EG000017) / Wiring set for power circuit breaker (EC002050)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Wiring set for circuit breaker (ecl@ss10.0.1-27-37-04-24 [ACN957011])			
Suitable for number of poles			3
Model			Other

## Approvals

Product Standards			UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.			E31593
UL Category Control No.			DIHS
CSA File No.			022086
CSA Class No.			1432-01
North America Certification			UL listed, CSA certified
Suitable for			Refer to main component information

## Dimensions

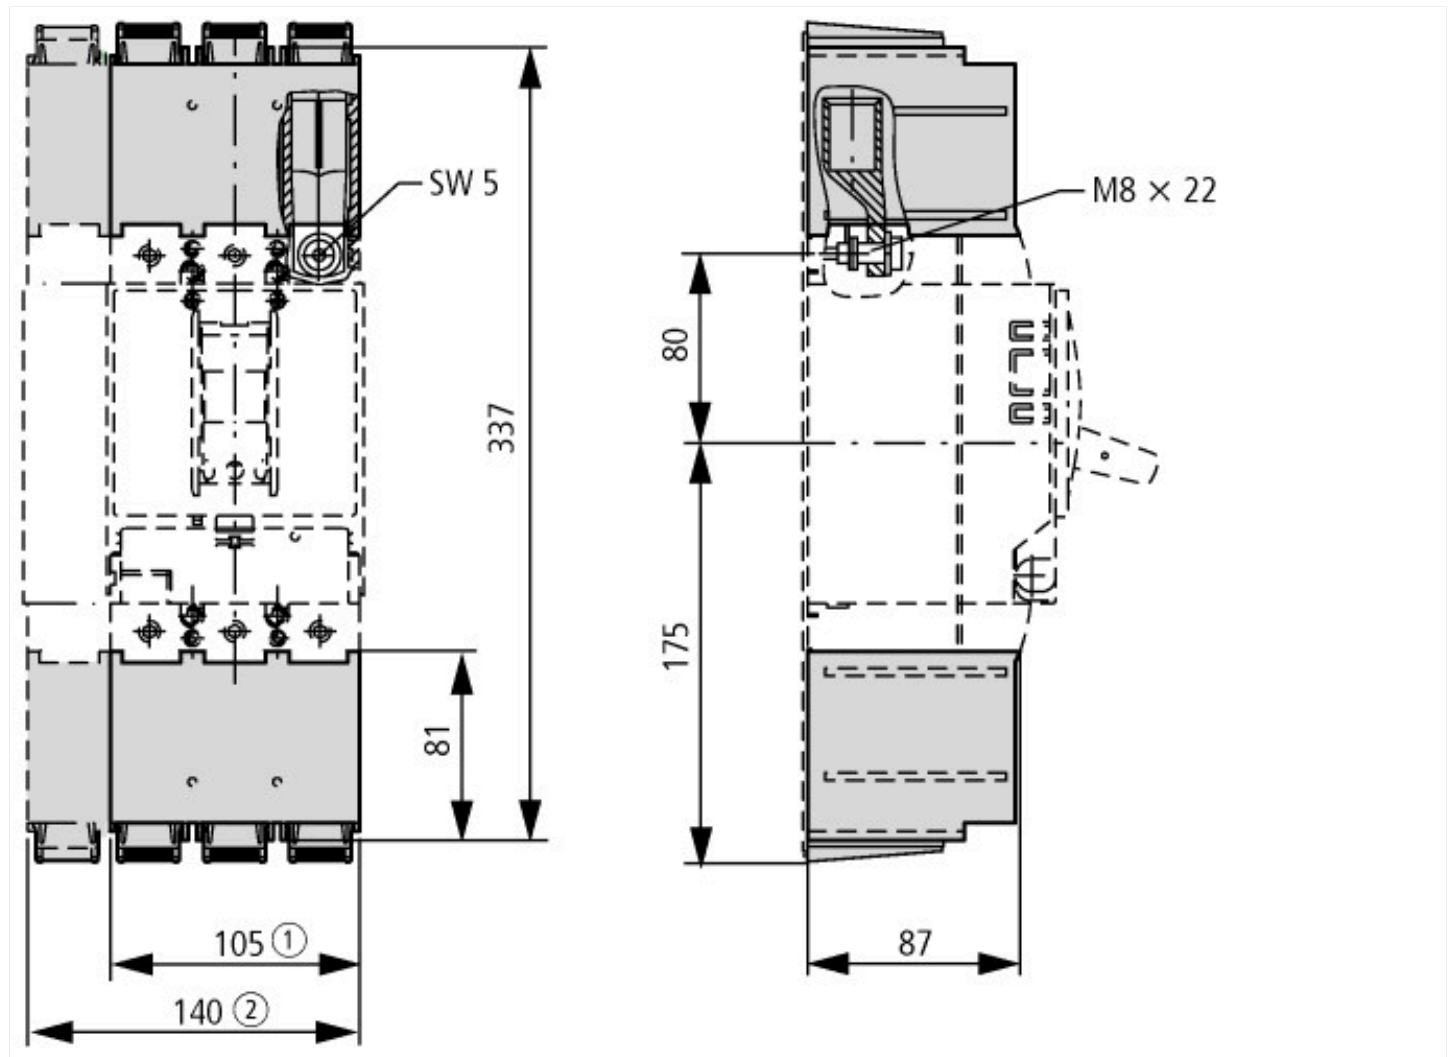

## Additional product information (links)

IL01206005Z (AWA1230-1917) Box terminal block

IL01206005Z (AWA1230-1917) Box terminal block

[https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL01206005Z2021\\_01.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206005Z2021_01.pdf)