



Operating Instructions Air Conditioner

Middle Static Pressure Duct (Type F3)

<At horizontal installation>



<At vertical installation>



Model No.

INDOOR UNIT

Middle Static Pressure Duct (Type F3)

S-3650PF3E

S-6071PF3E

S-1014PF3E

OUTDOOR UNIT

Single Split

See page 11.



ENGLISH

Before operating the unit, read these operating instructions thoroughly and keep them for future reference.





Thank you for purchasing this Panasonic product.
 This product is a commercial air conditioner indoor unit.
 Installation Instructions attached.

Contents

- Safety Precautions 2
- Precautions for Use 5
- Names of Parts 6

- Maintenance 7
- Operation Mechanism 7
- nanoe™ X Function 8
- Troubleshooting 9
 - Before Requesting Services 10

- Specifications 12
 - Indoor unit 12
 - Outdoor unit 13

	WARNING	This symbol shows that this equipment uses a flammable refrigerant. If the refrigerant is leaked, together with an external ignition source, there is a possibility of ignition.
	CAUTION	This symbol shows type of flammable refrigerant contained in the system.
	CAUTION	This symbol shows that a service personnel should be handling this equipment with reference to the Technical Manual.
	CAUTION	This symbol shows that there is information included in the Operating Instructions and/or Installation Instructions.

Product Information

If you have problems or questions concerning your Air Conditioner, you will need the following information. Model and serial numbers are on the nameplate.

Model No. _____

Serial No. _____

Date of purchase _____

Dealer's address _____

Phone number _____





Important Information Regarding The Refrigerant Used

NOTE

Refer to the Installation Instructions attached to the outdoor unit.


Safety Precautions

The following symbols used in this manual, alert you to potentially dangerous conditions to users, service personnel or the appliance:

	WARNING	This symbol refers to a hazard or unsafe practice which can result in severe personal injury or death.
	CAUTION	This symbol refers to a hazard or unsafe practice which can result in personal injury or product or property damage.
	Prohibited matters	
		Matters to be observed


- Read these Operating Instructions carefully before using this air conditioner. If you still have any difficulties or problems, consult your dealer for help.
- This air conditioner is designed to give you comfortable room conditions. Use this only for its intended purpose as described in these Operating Instructions.

⚠ WARNING



Confirm to authorized dealer or specialist on usage of specified refrigerant type. Using of refrigerant other than the specified type may cause product damage, burst and injury, etc.


This air conditioner has no ventilator for intaking fresh air from outdoors. You must open doors or windows frequently when you use gas or oil heating appliances in the same room, which consume a lot of oxygen from the air. Otherwise there is a risk of suffocation in an extreme case.



Never use or store gasoline or other flammable vapor or liquid near the air conditioner — it is very dangerous.

Do not use this appliance in a potentially explosive atmosphere.

Never touch the unit with wet hands.

Do not insert your fingers or other objects into the air conditioner indoor or outdoor unit, rotating parts may cause injury. 

WARNING



If the refrigerant comes in contact with a flame, it produces toxic gases.

For safety, be sure to turn the air conditioner off and also to disconnect the power before cleaning or servicing.

Pull off the power plug from a receptacle, or switch off the breaker, or switch off the power disconnecting mean to isolate the air conditioner from the main power supply in case of emergency.



Dispose of according to national and/or local legislation.



This product must not be modified or disassembled under any circumstances.

Modified or disassembled unit may cause fire, electric shock or injury.

Do not clean inside the indoor and outdoor units by users. Engage authorized dealer or specialist for cleaning.

In case of malfunction of this appliance, do not repair by yourself. Contact the sales dealer or service dealer for a repair and disposal.



Provide a power outlet to be used exclusively for each unit, and a power supply disconnect, Earth Leakage Circuit Breaker (ELCB) or Residual Current Device (RCD) for overcurrent protection should be provided in the exclusive line.

Provide a power outlet exclusively for each unit, and full disconnection means having a contact separation in all poles must be incorporated in the fixed wiring in accordance with the wiring rules.

To prevent possible hazards from insulation failure, the unit must be grounded.



Do not use modified cord, joint cord, extension cord or unspecified cord to prevent overheating and fire.



The appliance shall be stored in a room without continuously operating ignition sources (for example: open flames, an operating gas appliance or an operating electric heater).

Be aware that refrigerants may not contain an odour.

An unventilated area where the appliance using flammable refrigerants is installed shall be so constructed that should any refrigerant leak, it will not stagnate so as to create a fire or explosion hazard.

The appliance shall be stored in a well-ventilated area where the room size corresponds to the room area as specified for operation.

After the unit is installed, never fail to ask the installer for the floor space of the room where the unit is installed and the refrigerant charge amount.

In case the unit or the room divider is changed, never fail to consult the sales dealer or service dealer.



Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.

Do not pierce or burn.

In cases that require mechanical ventilation, ventilation openings shall be kept clear of obstruction.

WARNING



The appliance shall be stored in a room without continuously operating open flames (for example: an operating gas appliance) and ignition sources (for example: an operating electric heater).



Stop using the product when any abnormality/failure occurs and disconnect the power plug or turn off the power switch and breaker. (Risk of smoke/fire/electric shock)

Examples of abnormality/failure:

- The ELCB trips frequently.
- The product sometimes does not start when turned on.
- The power is sometimes disconnected when the cord is moved.
- Burnt odor or abnormal noise is detected during operation.
- The body is deformed or abnormally hot.
- Water leaks from the indoor unit.
- Power cord or plug becomes abnormally hot.
- Fan speed cannot be controlled.
- The unit stops running immediately even if it is switched on for operation.
- The fan does not stop even if the operation is stopped.

Contact immediately your local dealer for maintenance/repair.



Do not sit or step on the unit. You may fall down accidentally.



CAUTION



This appliance is intended to be used by expert or trained users in shops, in light industry and on farms, or for commercial use by lay persons.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

<for European market only>

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

Keep the fire alarm and the air outlet at least 1.5 m away from the unit.

Do not cool or heat the room too much if babies or invalids are present.



Do not turn the air conditioner on and off from the power mains switch. Use the ON/OFF operation button.

Do not stick anything into the air outlet of the outdoor unit. This is dangerous because the fan is rotating at high speed.



Do not touch the air inlet or the sharp aluminum fins of the outdoor unit. You may get injured.



Do not stick any object into the FAN CASE. You may be injured and the unit may be damaged.



NOTICE

- The appliance shall be stored so as to prevent mechanical damage from occurring.
- The compressor may occasionally stop during thunderstorms. This is not a mechanical failure. The unit automatically recovers after a few minutes.
- The English text is the original instructions. Other languages are translation of the original instructions.

Precautions for Use

Installation

- This air conditioner must be installed properly by qualified installation technicians in accordance with the Installation Instructions provided with the unit.
- Before installation, check that the voltage of the electric supply in your home or office is the same as the voltage shown on the nameplate.

WARNING

Avoid the following locations for installation.

- Locations where smoke or combustible gas exists.
Also locations of extremely high temperature such as a greenhouse.
- Locations where excessively high heat-generating objects are placed.

Attention:

- Avoid installing the outdoor unit where salty sea water can splash directly onto it or in sulphurous air near a spa.
(To protect the air conditioner from heavy corrosion)

Wiring

- All wiring must conform to the local electrical codes.
(Consult your dealer or a qualified electrician for details.)
- Each unit must be properly grounded with a ground (or earth) wire or through the supply wiring.
- Wiring must be done by a qualified electrician.

Operation Preparation

Turn the power mains on 5 hours before the start of operation.

(For warm-up)

- Leave the power mains ON for continuous use.

NOTE

Pull off the power plug from a receptacle, or switch off the breaker, or switch off the power disconnecting mean to isolate the air conditioner from the main power supply when not in use for a long time.

Tips for Energy Saving

■ Avoid

- **Do not block the air intake and outlet of the unit.**
(If either is obstructed, the unit will not function well, causing malfunction.)
- During cooling operation, use sunshades, blinds or curtains to prevent direct sunlight from entering the room.

■ Do

- Always keep the air filter clean.
(A clogged filter will impair the performance of the unit.)
→ "Maintenance" (P.7)
- To prevent conditioned air from escaping, keep windows, doors and any other openings closed.

Disposal of Old Equipment

Only for European Union and countries with recycling systems



This symbol on the products, packaging, and/or accompanying documents means that used electrical and electronic products must not be mixed with general household waste.

For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.

By disposing of them correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment. For more information about collection and recycling, please contact your local municipality.


Penalties may be applicable for incorrect disposal of this waste, in accordance with national legislation.

Names of Parts

INDOOR UNIT

Type F3 (Middle Static Pressure Duct)

At standard installation
(Horizontal installation in the ceiling, rear side air intake)

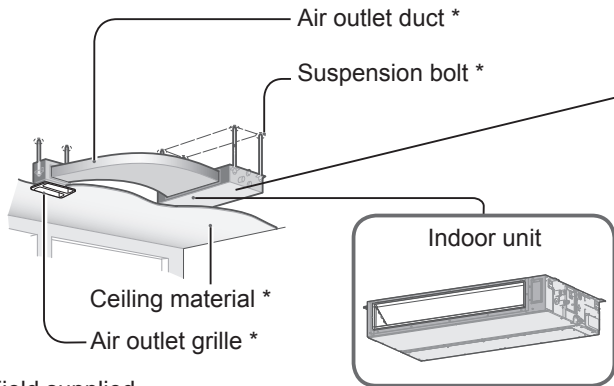

Label
(attached to the lid of electrical component box)

This air conditioner incorporates a biocidal product. Ionized air generated by a device incorporated in the air conditioner deactivates bacteria and viruses in the air, and on surfaces, and inhibits mould growth on surfaces.
Active substances: free radicals generated in situ from ambient air or water




* Field supplied

OUTDOOR UNIT

PZ3 (Type 36, 50)


Air intake



Air outlet

PZ3 (Type 60, 71)

Air intake



Air outlet

PZ2 (Type 60, 71)

Air intake




Air outlet

PZ3 (Type 100, 125, 140)

PZ2 (Type 100, 125, 140)

Air intake




Air outlet

PZH3 (Type 36, 50, 60)

PZH2 (Type 36, 50, 60)

Air intake




Air outlet

PZH3 (Type 71)

PZH2 (Type 71)

Air intake




Air outlet

PZH3 (Type 100, 125, 140)

PZH2 (Type 100, 125, 140)

Air intake



Air outlet

Optional


Wireless Remote Controller



Model No. CZ-RWS3
The receiver : Model No. CZ-RWRC3
(For all indoor units)

(Infrared Remote Controller)

Timer Remote Controller



Model No. CZ-RTC4
For all indoor units

High-spec Wired Remote Controller



Model No. CZ-RTC5B
For all indoor units

Wired Remote Controller



Model No. CZ-RTC6 series
For all indoor units

Read the Operating Instructions included with the Remote Controller.

■ Operation & Adjusting Airflow Direction

Refer to the Operating Instructions attached to the Remote Controller.

Maintenance

WARNING

- For safety, be sure to turn the air conditioner off and disconnect the power before cleaning. (Otherwise, electric shock or injury may result because the fan is rotating at high speed.)
- Do not pour water on the indoor unit. (This may damage the internal components and cause an electric shock hazard.)

CAUTION

- Never use solvents or harsh chemicals. Also, do not wipe plastic parts using very hot water. (This may cause deformation or change in colour.)
- Some metal edges and fins are sharp. Be careful when you clean those parts. (Injury may result.)
- Use a firm stool or ladder when cleaning an indoor unit installed in high locations.

- The internal coil and other components of the outdoor unit must be cleaned periodically.
 - Consult your dealer or service center.

■ Air Filter Maintenance




When cleaning the air filter, consult your dealer or service center.

Operation Mechanism

■ Heating performance

- This air conditioner utilizes outside air for heating; its heating performance reduces as outside temperature decreases.
 - In the event that heating is not sufficient, please use an additional heating appliance.

■ Defrosting

- This appliance may start defrosting operation to melt frost formed in the outdoor unit.
 - ① **Defrosting starts:** The indoor unit fan stops (or the speed becomes extremely slow).
 - “” (STANDBY) appears.
 - ② **Heating operation resumes after several minutes:** The indoor unit fan remains stopped (or it will run at a very slow speed) until the indoor heat exchanger coil warms up sufficiently.
 - “” (STANDBY) appears.
 - ③ **Defrosting is complete:** The indoor unit fan starts operation.
 - “” (STANDBY) disappears.

■ “DRY” operation

- Once the room temperature reaches the level that was set, the outdoor unit repeats the cycle of turning on and off automatically.
- When the room temperature is more likely to reach the level that was set, the fan speed is set to “breeze” (light wind) automatically.


■ Should power failure occur while the unit is running

The unit will resume operation automatically. Operation settings prior to power failure will be used.

nanoe™ X Function

Display during operation of nanoe™ X

Example: Initial screen of remote controller

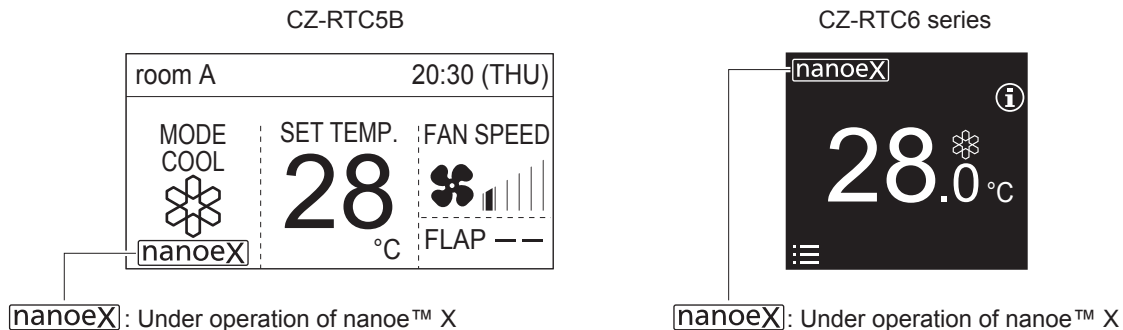

nanoe™ X For a freshness and cleaner environment

nanoe™ X generates negative ions using the air in the room to give a healthy air.

It also reduces the smell in the room, and constrains propagations of mold and bacteria.

When purchased, the nanoe™ X function is designed to automatically operate.

- If you wish to set to OFF, refer to the operating instructions for the remote controller adaptable to nanoe™ X function.

The effect of nanoe™ X may decrease slightly depending on the installation conditions of the unit.



Troubleshooting

Check before consulting or requesting services.

Symptom		Cause / Action
Indoor unit	Noise Sound like streaming water is heard during operation or after operation. Cracking noise is heard during operation or when operation stops.	• Sound of refrigerant liquid flowing inside unit • Sound of drainage water through drain pipe
		• Sound due to temperature changes of parts
	Discharged air smells during operation.	• Indoor odor components, cigarette odor and cosmetic odor accumulated in the air conditioner and its air is discharged. • The unit inside is dirty. (Contact your dealer.)
	Dewdrops accumulate near the air outlet during cooling operation.	• Internal moisture is cooled by cool wind and accumulates as dewdrops.
	Fog occurs during cooling operation.	• If the air conditioner has been installed at places such as restaurants where large amounts of oil mist exist, cleaning is necessary because the unit inside (heat exchanger) is dirty. (Contact your dealer.)
	Fog occurs during heating operation.	• Defrost operation is in process.
	The fan is rotating for a while even though operation stops.	• The fan may rotate to dry the heat exchanger depending on the setting.
	Dust is discharged.	• Dust accumulated inside the indoor unit is discharged.
	At the initial high-speed operation, the fan sometimes rotates faster than the setting speed. (3 to 30 minutes)	• This is for operation check in order to confirm whether the fan motor rotation is within the range of use.
	Humming noise comes out.	• This is the sound of nanoe™ X being discharged.
	nanoeX is not displayed on the remote controller.	• Has nanoe™ X been set to OFF? → Set to ON.
	⚠ nanoeX is displayed on the remote controller.	• nanoe™ X is considered abnormal. (Contact your dealer.)
Outdoor unit	No operation (When the power is turned on immediately / When operation is stopped and resumed immediately)	• Operation is not activated for the first approx. 3 minutes because the compressor protection circuit is activated.
	Noise occurs during heating operation.	• Defrost operation is in process.
	Steam comes out during heating operation.	
	The fan continues to rotate even after the operation is stopped using the remote controller.	• This is for smooth operation.


Troubleshooting

Before Requesting Services

Symptom	Cause	Action
The air conditioner does not operate although the power is turned on.	Power failure or after power failure	Press the power ON/OFF button on the remote controller.
	The operation (power) button is turned off.	<ul style="list-style-type: none"> • If the breaker is turned off, turn the power on. • If the breaker has been tripped, consult your dealer without turning it on.
	Fuse blow out.	Contact your dealer.
Poor cooling or heating performance	The air intake or air outlet of indoor and outdoor units is clogged with dust.	Remove the dust.
	The fan speed switch is set to "Low".*	Change to "Medium" or "High".*
	Improper temperature settings	See "Tips for Energy Saving". (P.5)
	The room is exposed to direct sunlight in cooling mode.	
	Doors or windows are open.	
	The air filter is clogged.	See "Maintenance". (P.7)
	Too many heat sources in the room in cooling mode.	Use minimum heat sources and in a short time.
Too many people in the room in cooling mode.	Lower the temperature setting or change to "Medium" or "High".*	

* Regarding the fan speed control display on the remote controller, see page 12.

If your air conditioner does not work properly even after checking each item of "Before Requesting Services" and "Troubleshooting"

- Stop the operation immediately and turn the power off. Then contact your dealer and report the serial number and symptom. You also report if the inspection mark  and the letters E, F, H, L, P in combination with numbers appear on the LCD of the remote controller.
- Never repair the air conditioner by yourself since it is very dangerous for you to do so.

Connectable outdoor unit lineup

Europe

■ Refrigerant type : R32

Outdoor unit type		36	45	50	60
PZH2	1-phase	U-36PZH2E5	–	U-50PZH2E5	U-60PZH2E5
	3-phase	–	–	–	–
PZ2	1-phase	–	–	–	U-60PZ2E5
	3-phase	–	–	–	–

Outdoor unit type		71	100	125	140
PZH2	1-phase	U-71PZH2E5	U-100PZH2E5	U-125PZH2E5	U-140PZH2E5
	3-phase	U-71PZH2E8	U-100PZH2E8	U-125PZH2E8	U-140PZH2E8
PZ2	1-phase	U-71PZ2E5	U-100PZ2E5	U-125PZ2E5	U-140PZ2E5
	3-phase	–	U-100PZ2E8	U-125PZ2E8	U-140PZ2E8

Outdoor unit type		36	50	60	71
PZH3	1-phase	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5
	3-phase	–	–	–	U-71PZH3E8
PZ3	1-phase	U-36PZ3E5	U-50PZ3E5	U-60PZ3E5A	U-71PZ3E5A

Outdoor unit type		100	125	140
PZH3	1-phase	U-100PZH3E5	U-125PZH3E5	U-140PZH3E5
	3-phase	U-100PZH3E8	U-125PZH3E8	U-140PZH3E8
PZ3	1-phase	U-100PZ3E5	U-125PZ3E5	U-140PZ3E5
	3-phase	U-100PZ3E8	U-125PZ3E8	U-140PZ3E8

Oceania

■ Refrigerant type : R32

Outdoor unit type		36	45	50	60
PZ2	1-phase	–	–	–	U-60PZ2R5
	3-phase	–	–	–	–

Outdoor unit type		71	100	125	140
PZH2	1-phase	U-71PZH2R5	U-100PZH2R5	U-125PZH2R5	U-140PZH2R5
	3-phase	–	U-100PZH2R8	U-125PZH2R8	U-140PZH2R8
PZ2	1-phase	U-71PZ2R5	U-100PZ2R5	U-125PZ2R5	U-140PZ2R5
	3-phase	–	U-100PZ2R8	U-125PZ2R8	U-140PZ2R8

Outdoor unit type		36	50	60	71
PZH3	1-phase	–	–	–	U-71PZH3R5
	3-phase	–	–	–	–
PZ3	1-phase	U-36PZ3R5	U-50PZ3R5	U-60PZ3R5	U-71PZ3R5

Outdoor unit type		100	125	140
PZH3	1-phase	U-100PZH3R5	U-125PZH3R5	U-140PZH3R5
	3-phase	U-100PZH3R8	U-125PZH3R8	U-140PZH3R8
PZ3	1-phase	U-100PZ3R5	U-125PZ3R5	U-140PZ3R5
	3-phase	U-100PZ3R8	U-125PZ3R8	U-140PZ3R8

Specifications

Indoor unit

Middle Static Pressure Duct (Type F3)

Model Name		S-3650PF3E			S-6071PF3E		S-1014PF3E			
Power source (Europe)		220 - 230 - 240 V~ 50 Hz								
Power source (Oceania)		230 - 240 V~ 50 Hz								
Cooling capacity	kW	3.4	4.0	5.0	5.7	6.8	9.5	12.1	13.4	
	BTU/h	11,600	13,600	17,100	19,400	23,200	32,400	41,300	45,700	
	Sensible kW	2.9	3.4	3.9	4.7	5.1	7.5	9.3	10.1	
	Latent kW	0.5	0.6	1.1	1.0	1.7	2.0	2.8	3.3	
Heating capacity	kW	4.0	4.5	5.5	7.0	7.5	10.8	13.5	15.5	
	BTU/h	13,600	15,400	18,800	23,900	25,600	36,800	46,100	52,900	
Cooling electric power input*		kW	0.063	0.063	0.103	0.079	0.079	0.127	0.153	0.265
Heating electric power input*		kW	0.063	0.063	0.103	0.079	0.079	0.127	0.153	0.265
Sound pressure level***	High	dB(A)	30	30	34	30	30	33	35	39
	Medium	dB(A)	27	27	30	26	26	29	31	35
	Low**	dB(A)	22	22	25	23	23	25	27	29
Sound power level***	High	dB(A)	53	53	57	53	53	56	58	62
	Medium	dB(A)	50	50	53	49	49	52	54	58
	Low**	dB(A)	45	45	48	46	46	48	50	52
Unit dimensions (H×W×D)		mm	250×800×730	250×800×730	250×800×730	250×1,000×730	250×1,000×730	250×1,400×730	250×1,400×730	250×1,400×730
Net weight		kg	25	25	25	30	30	39	39	39

In the case of standard installation (Horizontal installation in the ceiling, rear side air intake)

Operation condition temperature range

• Cooling mode : 18°C~32°C DB • Heating mode : 16°C~30°C DB



* In the case of nanoe™ X "OFF"

** The value of low noise is indicated in fan mode.

*** Fan speed display on the remote controller

High :  (CZ-RTC4),  (CZ-RTC5B, CZ-RTC6 series)

Medium :  (CZ-RTC4),  (CZ-RTC5B, CZ-RTC6 series)

Low :  (CZ-RTC4),  (CZ-RTC5B, CZ-RTC6 series)

Outdoor unit

Single Split Outdoor Unit (R32)

Europe	Model Name	U-36PZH2E5	U-50PZH2E5	U-60PZH2E5
	Power source	220 - 230 - 240 V~ 50 Hz		
Cooling capacity	kW	3.6	5.0	6.0
	BTU/h	12,300	17,100	20,500
Heating capacity	kW	4.0	5.6	7.0
	BTU/h	13,600	19,100	23,900
Sound pressure level (Cooling / Heating)	dB(A)	43 / 44	45 / 48	46 / 49
Sound power level (Cooling / Heating)	dB(A)	62 / 64	64 / 68	65 / 69
Unit dimensions (H×W×D)	mm	695×875×320	695×875×320	695×875×320
Net weight	kg	43	43	44

Operation condition temperature range

• Cooling mode : -15°C~46°C DB • Heating mode : -20°C~24°C DB

Europe	Model Name	U-71PZH2E5	U-100PZH2E5	U-125PZH2E5	U-140PZH2E5
	Power source	220 - 230 - 240 V~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	65 / 67	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	68	99	99	99

Europe	Model Name	U-71PZH2E8	U-100PZH2E8	U-125PZH2E8	U-140PZH2E8
	Power source	380 - 400 - 415 V 3N~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	65 / 67	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	68	99	99	99

Operation condition temperature range

• Cooling mode : -15°C~46°C DB (Type 71)

: -15°C (-20°C)* ~46°C DB (Type 100, 125, 140)

* It is possible to operate at -20°C only in the computer rooms with the piping length of 30 m or less.

• Heating mode : -20°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Specifications

Outdoor unit

Single Split Outdoor Unit (R32)

Europe	Model Name	U-60PZ2E5	U-71PZ2E5	U-100PZ2E5	U-125PZ2E5	U-140PZ2E5
	Power source	220 - 230 - 240 V~ 50 Hz				
Cooling capacity	kW	6.0	7.1	10.0	12.5	14.0
	BTU/h	20,500	24,200	34,100	42,700	47,800
Heating capacity	kW	6.0	7.1	10.0	12.5	14.0
	BTU/h	20,500	24,200	34,100	42,700	47,800
Sound pressure level (Cooling / Heating)	dB(A)	46 / 48	49 / 49	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	65 / 68	69 / 69	70 / 70	73 / 73	74 / 74
Unit dimensions (H×W×D)	mm	695×875×320	695×875×320	996×980×370	996×980×370	996×980×370
Net weight	kg	44	44	90	94	94

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Europe	Model Name	U-100PZ2E8	U-125PZ2E8	U-140PZ2E8
	Power source	380 - 400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Heating capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	70 / 70	73 / 73	74 / 74
Unit dimensions (H×W×D)	mm	996×980×370	996×980×370	996×980×370
Net weight	kg	90	94	94

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Europe	Model Name	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5
	Power source	220 - 230 - 240 V~ 50 Hz		
Cooling capacity	kW	3.6	5.0	6.0
	BTU/h	12,300	17,100	20,500
Heating capacity	kW	4.0	5.6	7.0
	BTU/h	13,600	19,100	23,900
Sound pressure level (Cooling / Heating)	dB(A)	43 / 44	46 / 48	47 / 50
Sound power level (Cooling / Heating)	dB(A)	62 / 64	64 / 67	65 / 69
Unit dimensions (H×W×D)	mm	695×875×320	695×875×320	695×875×320
Net weight	kg	42	42	43

Operation condition temperature range

• Cooling mode : -15°C~46°C DB • Heating mode : -20°C~24°C DB

Europe	Model Name	U-71PZH3E5	U-100PZH3E5	U-125PZH3E5	U-140PZH3E5
	Power source	220 - 230 - 240 V~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	65 / 67	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	65	98	98	98

Europe	Model Name	U-71PZH3E8	U-100PZH3E8	U-125PZH3E8	U-140PZH3E8
	Power source	380 - 400 - 415 V 3N~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	65 / 67	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	65	98	98	98

Operation condition temperature range

• Cooling mode : -15°C~48°C DB • Heating mode : -20°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Specifications

Outdoor unit

Single Split Outdoor Unit (R32)

Europe	Model Name	U-36PZ3E5	U-50PZ3E5	U-60PZ3E5A	U-71PZ3E5A
	Power source	220 - 230 - 240 V~ 50 Hz			
Cooling capacity	kW	3.6	5.0	6.0	7.1
	BTU/h	12,300	17,100	20,500	24,200
Heating capacity	kW	3.6	5.0	6.0	7.1
	BTU/h	12,300	17,100	20,500	24,200
Sound pressure level (Cooling / Heating)	dB(A)	46 / 47	46 / 46	47 / 48	48 / 49
Sound power level (Cooling / Heating)	dB(A)	64 / 66	64 / 64	64 / 65	66 / 68
Unit dimensions (H×W×D)	mm	619×824×299	619×824×299	695×875×320	695×875×320
Net weight	kg	32	35	42	50

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Europe	Model Name	U-100PZ3E5	U-125PZ3E5	U-140PZ3E5	U-100PZ3E8	U-125PZ3E8	U-140PZ3E8
	Power source	220 - 230 - 240 V~ 50 Hz			380 - 400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	9.5	12.1	13.4	9.5	12.1	13.4
	BTU/h	32,400	41,300	45,700	32,400	41,300	45,700
Heating capacity	kW	9.5	12.1	13.4	9.5	12.1	13.4
	BTU/h	32,400	41,300	45,700	32,400	41,300	45,700
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	55 / 55	56 / 56	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	70 / 70	73 / 73	74 / 74	70 / 70	73 / 73	74 / 74
Unit dimensions (H×W×D)	mm	996×980×370	996×980×370	996×980×370	996×980×370	996×980×370	996×980×370
Net weight	kg	83	87	87	83	87	87

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Oceania	Model Name	U-71PZH2R5	U-100PZH2R5	U-125PZH2R5	U-140PZH2R5
	Power source	230 - 240 V~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	64 / 66	68 / 68	69 / 69	70 / 70
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	68	99	99	99

Oceania	Model Name	U-100PZH2R8	U-125PZH2R8	U-140PZH2R8
	Power source	400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Heating capacity	kW	11.2	14.0	16.0
	BTU/h	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	68 / 68	69 / 69	70 / 70
Unit dimensions (H×W×D)	mm	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	99	99	99

Operation condition temperature range

• Cooling mode : -15°C~46°C DB • Heating mode : -20°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Specifications

Outdoor unit

Single Split Outdoor Unit (R32)

Oceania	Model Name	U-60PZ2R5	U-71PZ2R5	U-100PZ2R5	U-125PZ2R5	U-140PZ2R5
	Power source	230 - 240 V~ 50 Hz				
Cooling capacity	kW	6.0	7.1	10.0	12.5	14.0
	BTU/h	20,500	24,200	34,100	42,700	47,800
Heating capacity	kW	6.0	7.1	10.0	12.5	14.0
	BTU/h	20,500	24,200	34,100	42,700	47,800
Sound pressure level (Cooling / Heating)	dB(A)	46 / 48	49 / 49	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	65 / 66	67 / 67	68 / 67	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	695×875×320	695×875×320	996×980×370	996×980×370	996×980×370
Net weight	kg	44	44	90	94	94

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Oceania	Model Name	U-100PZ2R8	U-125PZ2R8	U-140PZ2R8
	Power source	400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Heating capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	68 / 67	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×980×370	996×980×370	996×980×370
Net weight	kg	90	94	94

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Oceania	Model Name	U-71PZH3R5	U-100PZH3R5	U-125PZH3R5	U-140PZH3R5
	Power source	230 - 240 V~ 50 Hz			
Cooling capacity	kW	7.1	10.0	12.5	14.0
	BTU/h	24,200	34,100	42,700	47,800
Heating capacity	kW	8.0	11.2	14.0	16.0
	BTU/h	27,300	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	48 / 50	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	65 / 67	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	996×940×340	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	65	98	98	98

Oceania	Model Name	U-100PZH3R8	U-125PZH3R8	U-140PZH3R8
	Power source	400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	10.0	12.5	14.0
	BTU/h	34,100	42,700	47,800
Heating capacity	kW	11.2	14.0	16.0
	BTU/h	38,200	47,800	54,600
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	53 / 53	54 / 54
Sound power level (Cooling / Heating)	dB(A)	69 / 69	70 / 70	71 / 71
Unit dimensions (H×W×D)	mm	1,416×940×340	1,416×940×340	1,416×940×340
Net weight	kg	98	98	98

Operation condition temperature range

• Cooling mode : -15°C~48°C DB • Heating mode : -20°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Specifications

Outdoor unit

Single Split Outdoor Unit (R32)

Oceania	Model Name	U-36PZ3R5	U-50PZ3R5	U-60PZ3R5	U-71PZ3R5
	Power source	230 - 240 V~ 50 Hz			
Cooling capacity	kW	3.6	5.0	6.0	7.1
	BTU/h	12,300	17,100	20,500	24,200
Heating capacity	kW	3.6	5.0	6.0	7.1
	BTU/h	12,300	17,100	20,500	24,200
Sound pressure level (Cooling / Heating)	dB(A)	46 / 47	46 / 46	47 / 48	48 / 49
Sound power level (Cooling / Heating)	dB(A)	64 / 66	64 / 64	64 / 65	66 / 68
Unit dimensions (H×W×D)	mm	619×824×299	619×824×299	695×875×320	695×875×320
Net weight	kg	32	35	42	50

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Oceania	Model Name	U-100PZ3R5	U-125PZ3R5	U-140PZ3R5	U-100PZ3R8	U-125PZ3R8	U-140PZ3R8
	Power source	230 - 240 V~ 50 Hz			400 - 415 V 3N~ 50 Hz		
Cooling capacity	kW	9.5	12.1	13.4	9.5	12.1	13.4
	BTU/h	32,400	41,300	45,700	32,400	41,300	45,700
Heating capacity	kW	9.5	12.1	13.4	9.5	12.1	13.4
	BTU/h	32,400	41,300	45,700	32,400	41,300	45,700
Sound pressure level (Cooling / Heating)	dB(A)	52 / 52	55 / 55	56 / 56	52 / 52	55 / 55	56 / 56
Sound power level (Cooling / Heating)	dB(A)	70 / 70	73 / 73	74 / 74	70 / 70	73 / 73	74 / 74
Unit dimensions (H×W×D)	mm	996×980×370	996×980×370	996×980×370	996×980×370	996×980×370	996×980×370
Net weight	kg	83	87	87	83	87	87

Operation condition temperature range

• Cooling mode : -10°C~43°C DB • Heating mode : -15°C~24°C DB

Rated conditions

Cooling : Indoor intake air temp. 27°C DB / 19°C WB. Outdoor intake air temp. 35°C DB.

Heating : Indoor intake air temp. 20°C DB. Outdoor intake air temp. 7°C DB / 6°C WB.

Panasonic Corporation
<http://www.panasonic.com>

© Panasonic Corporation 2019 - 2021

Contact in the UK
Panasonic UK, a branch of Panasonic
Marketing Europe GmbH, Maxis 2,
Western Road, Bracknell, Berkshire, RG12 1RT

Authorised representative in EU
Panasonic Testing Centre
Panasonic Marketing Europe GmbH
Winsbergring 15, 22525 Hamburg, Germany

WEB-ACXF55-27532-EN
DC1119-21221