
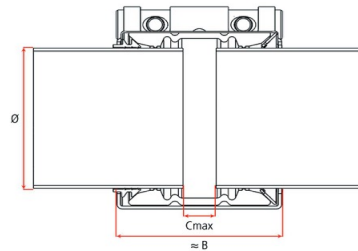


UNI-Combigrigrip S Ø 39 - 172 mm | PN16/10



Article No.:	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Product dimensions unstrained					Weight ≈ kg/Pcs.
				PN	PN	≈ b	c _{max}	≈ d	≈ H	M	
1-S-CG-W5-*-39-43	39	43	42,4/40	16	10	60	15	66	104	M8	0,40
1-S-CG-W5-*-47,5-52,5	47,5	52,5	48,3/50	16	10	60	15	74	112	M8	0,50
1-S-CG-W5-*-58-64	58	64	60,3/63	16	10	75	25	85	125	M8	0,60
1-S-CG-W5-*-72-80	72	80	73/75/76,1/79,5	16	10	95	30	108	164	M10	1,40
1-S-CG-W5-*-88-96	88	96	88,9/90	16	10	95	30	124	170	M10	1,50
1-S-CG-W5-*-104-112	104	112	104,8/108/110	16	10	95	30	141	187	M10	1,70
1-S-CG-W5-*-108-115	108	115	108/110/114,3	16	10	95	30	141	187	M10	1,70
1-S-CG-W5-*-122-130	122	130	125/127/129	16	10	95	30	158	202	M10	1,80
1-S-CG-W5-*-137-145	137	145	139,7/140/141,3/141,6	16	10	110	40	186	238	M12	3,50
1-S-CG-W5-*-157-165	157	165	159/160	16	10	110	40	205	255	M12	3,70
1-S-CG-W5-*-164-172	164	172	165/168,3	16	10	110	40	212	262	M12	3,80

* E for EPDM or N for NBR

Technical details are subject to change.

Materials / Components	Housing 1.4571 / 316 Ti	Lock bars 1.4571 / 316 Ti	Bolts A4 - 80 / 316 Ti	Anchoring 1.4404 / 316 L & 1.4310 / 301
Sealing	EPDM	NBR	Viton (on request)	Silicone (on request)
Temperature range	-30°C - +125°C	-20°C - +80°C	-20°C - +180°C	

Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + Strip inserts are required for special applications
- + Free from paint wetting disruptive substances

= Working pressure for industrial and land-based applications with 1.5x safety factor in bars

= Working pressure for marine applications with 4x safety factor in bars

Certified by all worldwide mayor institutions;

