

R 1/4" DRIVE METRIC 6-POINT SOCKETS




Standards :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5

Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.
- Available as sets on metal rack (Ref R.40E).

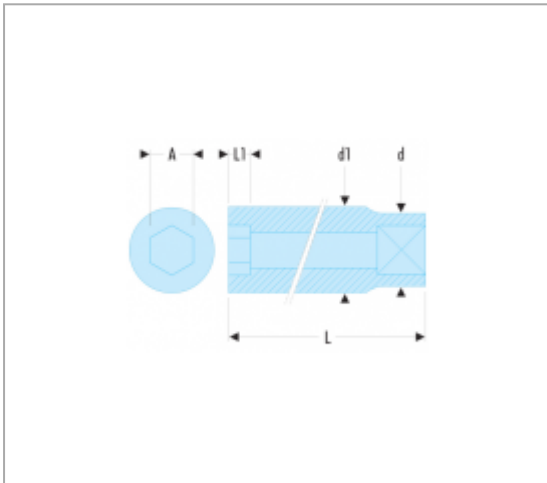

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	[G]	[KG]
R.3,2	3,2	11,2	5,9	2,4	22	2,4	6	4	
R.4	4,0	11,2	6,9	2,6	22	2,6	6		0.004
R.5	5,0	11,2	8,2	4,8	22	4,8	6		0.005
R.5,5	5,5	11,2	8,8	4,8	22	4,8	6	6	
R.6	6,0	11,2	9,4	5,6	22	5,6	6		0.006
R.7	7,0	11,0	11,0	6	22	6,0	6		0.007
R.8	8,0	12,0	12,0	6,50	22	6,5	6		0.008
R.9	9,0	13,2	13,2	6,50	22	6,5	6		0.010

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	[G]	[KG]
R.10	10,0	14,7	14,7	7,80	22	7,8	6		0.014
R.11	11,0	15,8	15,8	9	22	9,0	6		0.016
R.12	12,0	17,0	17,0	9,50	22	9.5	6		0.018
R.13	13,0	17,7	17,7	10	22	10	6		0.020
R.14	14,0	18,7	18,7	10	22	10	6		0.024