


## TYT Gasket for TYT Pipes and Fittings DN80-300

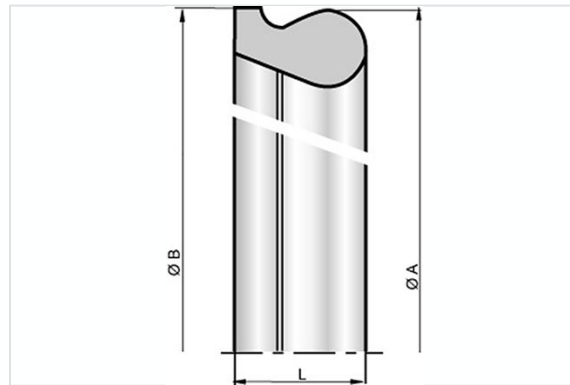

The TYTON gasket is a push-on joint. The watertightness is made by the compression of the elastomer gasket which operates during the assembling by the introduction of the spigot end inside the socket.

DN	L	Ø A	Ø B	Mass	SAP code
80 mm	26 mm	124 mm	126 mm	0.12 kg	JCA80BA
100 mm	26 mm	144 mm	146 mm	0.141 kg	JCB10BA
125 mm	26 mm	171 mm	173 mm	0.171 kg	JCB12BA
150 mm	26 mm	198 mm	200 mm	0.201 kg	JCB15BA
200 mm	30 mm	254 mm	256 mm	0.336 kg	JCB20BA
250 mm	32 mm	308 mm	310 mm	0.435 kg	JCB25BA
300 mm	34 mm	364 mm	366 mm	0.613 kg	JCB30BA

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- Elastomer quality : EPDM
- Quick and easy installation
- Possible axial play
- High coefficient security beyond the PFA
- High angular deflection possible

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*