





HD 8/23 G Classic

Self-sufficient, mobile, powerful: HD 8/23 G Classic cold water high-pressure cleaner with robust crankshaft pump and petrol engine. For demanding applications in construction and municipalities.



1 Independence

- Allows independence of external power sources.
- Complies with the requirements of exhaust emissions standard EU STAGE V.

2 Outstanding mobility

- Puncture-proof wheels guarantee permanently high mobility.
- The compact and slim machine is also very easy to manoeuvre in confined areas.

3 Durable and robust

- A robust tubular steel frame reliably protects the machine against damage.
- Proven safety technology such as thermo and safety valve and water filter.

4 Storage possibility for accessories

- Hose hook and accessory storage for simple storage and carrying.
- Ergonomic handle and hose storage.



HD 8/23 G Classic

- Independent high-pressure cleaning irrespective of external power sources
- Robust crankshaft pump with ceramic pistons
- Compact, light and very mobile

Technical data

Order no.	1.187-012.0	
EAN code	4054278731827	
Working pressure	bar / MPa	230 / 23
Max. pressure	bar / MPa	280 / 28
Flow rate	l/h	800
Drive type	Petrol	
Motor type	G300FA	
Engine rating	kW / hp	6.8 / 9.1
Number of simultaneous users	1	
Portability	High	
Weight	kg	50.92
Dimensions (L x W x H)	mm	878 × 538 × 702

Equipment


Spray gun	Standard	
High-pressure hose	m	10
Spray lance	mm	850
Cage protective frame	■	
Anti-twist system	-	
Electro start	-	
Crankshaft pump with ceramic pistons	■	
Water filter	■	
Servo control	-	

■ Included in the scope of supply.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER

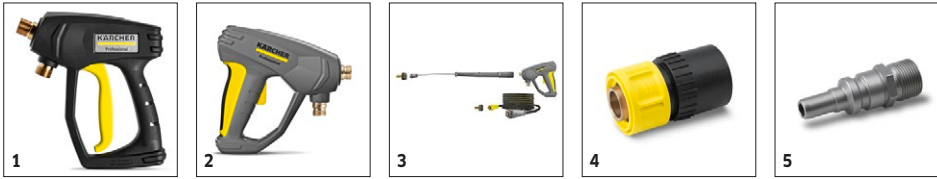

		Order no.	Flow rate				Price	Description	
Spray guns									
Standard trigger gun	1	9.751-139.0						High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 x 1.5.	■
EASY!Force Advanced	2	4.118-005.0						Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
EASY!Force conversion kit 2 - from machine	3	4.111-051.0						Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	□
Quick connect									
Quick coupling	4	6.401-458.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Male coupling	5	6.401-459.0						Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.	□

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER



		Order no.	Max. working pressure	Length		Price	Description	
Spray lance								
Spray lance 850 mm	1	9.751-146.0					Galvanised spray lance with manual screw fitting for high-pressure cleaners in the Classic range from Kärcher. Not rotatable. Length: 850 mm.	■
250 mm lance, non-rotatable	2	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
600 mm spray lance	3	9.751-140.0					600 mm long, zinc coated spray lance with hand screw connection. Not rotatable.	□
Rotating spray lances								
Spray lance	4	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	5	4.760-663.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	6	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	7	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	8	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Angular spray lance								
Spray lance for toilets and rain gutters	9	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance								
Flexible lance	10	6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
High pressure articulated joint	11	4.481-039.0	300 bar				High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	□
Undercarriage spray lance								
Underbody lance	12	4.760-245.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle	1	2.883-805.0	38					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
Power nozzle spray angle 15°									
Power nozzle	2	2.883-388.0	40					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□
Power nozzle spray angle 40°									
Power nozzle	3	2.884-522.0	40					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	□

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER



		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose	1	9.751-420.0	DN 8	315 bar	10 m		Up to 155 °C heat-resistant high-pressure hose (DN 8) with 10 m length. Perfect for all high-pressure cleaners in the Classic range from Kärcher.	■
	2	6.391-342.0	DN 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
	3	6.390-010.0	DN 8	315 bar	15 m		With screw connections on both sides, M 22 x 1.5 with bend protection.	□
	4	6.390-031.0	DN 8	315 bar	20 m		Screw connections at both ends, M 22 x 1.5, with kink protection.	□
	5	6.390-293.0	DN 8	315 bar	30 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
Longlife 400 with unions on both sides								
High-pressure hose Longlife	6	6.390-178.0	DN 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
	7	6.388-083.0	DN 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	□
	8	6.391-354.0	DN 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
	9	6.389-709.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	□
	10	6.390-027.0	DN 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	□
	11	6.390-294.0	DN 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	□

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Dirt blaster, large									
Dirt blaster	1	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>

Included in the scope of supply.
 Available accessories.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER



		Order no.	Max. working pressure	Nozzle size	Diameter		Price	Description	
Pipe cleaning hose, ID 6									
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	1	6.110-046.0	250 bar					The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	2	6.390-028.0	120 bar					The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	3	6.110-008.0	250 bar						<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	4	6.390-029.0	120 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	5	6.110-047.0	250 bar					The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	6	6.390-030.0	250 bar					The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Drum and tank cleaning									
Add-on kit mud sucker	7	2.641-798.0						For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER



		Order no.	Flow rate	Nozzle size	Diame- ter	Price	Description	
Hard Surface Cleaner FRV 30								
FRV 30 surface cleaner	1	2.642-999.0					With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
Rubber lip for FRV 30	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Hose fastening attachment kit	4	2.642-528.0					Suction cup for fixing the suction hose to smooth surfaces.	<input type="checkbox"/>
Dirt trap attachment kit	5	2.642-532.0					Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	<input type="checkbox"/>
FR 30 Me surface cleaner								
Hard surface cleaner FR 30 Me	6	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard Surface Cleaner FR 50								
Hard surface cleaner FR 50	7	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kits for FR								
Nozzle kit for FR	8	2.639-187.0	650 - 850 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit for FRV	9	2.642-431.0		40			Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
FRV 30 Me surface cleaner								
FRV 30 Me	10	2.642-911.0					Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	<input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	11	4.441-040.0					5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Flow rate					Price	Description	
Cup foam lance										
Cup foam lance Advanced	1	6.394-969.0							Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
Inno Foam Kit										
Inno Foam Set with detergent injector	2	2.640-151.0							High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set										
Easy Foam Set with RM injector	3	2.640-691.0							HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set										
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	4	2.640-688.0	700 - 1000 l/h						Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
Foam nozzle mounting kit										
Foam nozzle attachment kit	5	2.637-926.0							Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0

KÄRCHER



		Order no.					Price	Description	
Rotary coupling									
Rotary coupling	1	4.401-091.0						Reliably prevents twisting of HP hoses. Connection M 22 x 1.5 m. Handle protection	<input type="checkbox"/>
Cleaning agent injector									
Cleaning agent injector for high pressure (without nozzle)	2	3.637-170.0						Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Cleaning agent injector for high and low pressure (without nozzles)	3	3.637-001.0						Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 4.637-033.0									
Nozzle kit 750-1000 l/h	4	4.769-011.0						For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Nozzle kit 750-1000 l/h	5	4.769-047.0							<input type="checkbox"/>
Nozzle insert with order no. 4.637-032.0									
Nozzle insert up to 1,100 l/h - high pressure	6	4.769-003.0						Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Nozzle insert up to 1,100 l/h - low pressure	7	4.769-001.0						For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Coupling									
Coupler -2 x M22 x 1.5	8	4.403-002.0						For connecting and extending high-pressure hoses. Connection 2 x M 22 x 1.5.	<input type="checkbox"/>
Connector									
Nozzle screws / screw socket	9	4.402-022.0						Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapters									
Sealing cone complete	10	4.424-004.0						In order to install high-pressure hose with male coupling on thread with M22 x 1.5 Alternative:4.111-032.0 Adapter 4 - Device new / Hose old Swivel	<input type="checkbox"/>
EASY!Lock adapter									
Adapter 1 M22AG-TR22AG	11	4.111-029.0						Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	12	4.111-030.0						Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	13	4.111-031.0						Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	14	4.111-033.0						Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	15	4.111-034.0						Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	16	4.111-035.0						Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	17	4.111-036.0						Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Length				Price	Description	
Automatic, self-winding hose reels for wall mounting									
Automatic stainless steel hose reel	1	6.392-442.0	40 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>

Included in the scope of supply.
 Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Flow rate	Length of the product	Length	Price	Description
Hoses							
iSolar HP hose 7	1	6.392-978.0			8.5 m		□
iSolar HP hose 10	2	6.392-977.0			11.5 m		
iSolar HP hose 14	3	6.392-976.0			15 m		

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle kits for wet jet unit									
Nozzle kit for wet jet unit 040	3	2.637-900.0	40					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HD 8/23 G CLASSIC

1.187-012.0



		Order no.	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush	1	4.762-016.0						For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 x 1.5	<input type="checkbox"/>
	2	4.113-001.0							<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for > 800 l/h machines	3	4.762-559.0	900 - 1300 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>
	4	4.762-562.0	900 - 1300 l/h						<input type="checkbox"/>

Included in the scope of supply.
 Available accessories.