

Kulventil 2017K | Ball valve 2017K | Palloventtiili 2017K

2017K



Ball valve 2017K

- 1-piece ball valve PN40
- Thread ends, BSP straight
- PTFE seat, 15% glassfiber reinforce
- Reduced bore

- Blow out proof stem
- T max 200°C
- Handle locking

Kulventil 2017K


- 1-del. kulventil PN40
- Gånganslutning, BSP rak
- PTFE/15% kolfibertätning
- Reducerat genomlopp

- Utblåsningssäkrad spindel
- T max 200°C
- Låsbart handtag

Palloventtiili 2017K

- 1-os. palloventtiili PN40
- Kierrelitöntä, BSP suora
- PTFE/15% lasikuitutiiviste
- Supistettu aukko

- Uloslentämätön kara
- T max 200°C
- Lukittava kahva

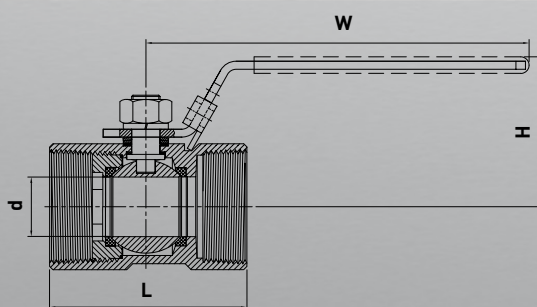

Osa Del Part	Materiaali Material
Runko Ventilhus Body	ASTM A351-CF8M HST
Pallo Kula Ball	AISI 316 HST
Kara Spindel Stem	AISI 316 HST
Pallon tiiviste Sätöstätning Ball seat	15% RTFE
Käsikahva Handtag Handle	AISI 304 RST
Holkki Handtagsskydd Handle sleeve	PVC

Mitat | Dimensioner | Dimensions (mm)

	8	10	15	20	25	32	40	50
	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
d	5	7	9	12	15	20	25	32
L	40	45	56	59	71	76	84	99
H	32	33	42	45	48	58	67	74
W	68	68	95	95	95	106	128	130
Kg	0,07	0,10	0,15	0,22	0,36	0,55	0,85	1,29
Koodi Kod Code	3798001	3798002	3798003	3798004	3798005	3798006	3798007	3798008
SAP	AAM685	AAM686	AAM687	AAM688	AAM689	AAM690	AAM691	AAM692