




ENERG
енергия · ενεργεια



NIBE

AMS 10-12



55 °C

35 °C



A++

A++



dB



58 dB

■ 11
■ **10**
■ 12
kW

■ 11
■ **9**
■ 12
kW



2019

811/2013





ENERG
енергия · ενέργεια


Y IJA
IE IA

NIBE



AMS10-12 + ACVM270

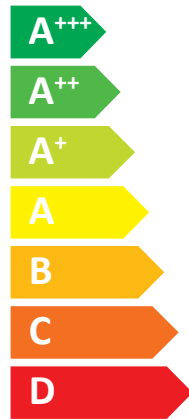

A++

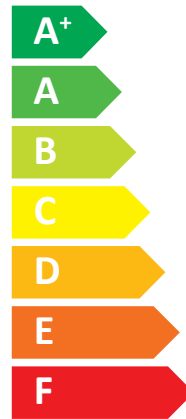

A



2019

811/2013



ENERG

енергия · ενέργεια

Y






IJA


IE


IA


NIBE


AMS10-12 + ACVM270













+ 

+ 

+ 


+ 

Supplier's name:	NIBE		
Model:	AMS10-12 + ACVM270		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	8,5	10,0	kW
Annual energy consumption for space heating, average climate	4132	6406	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	167	126	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,0	11,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7968	9794	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3424	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	133	108	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	184	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	58		dB

Data for package fiche

Controller class	II		
Controller contribution to efficiency	2,0		%
Seasonal space heating energy efficiency of package, average climate:	169	128	%
Seasonal space heating energy efficiency class for package, average climate:	A++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	135	110	%
Seasonal space heating energy efficiency of package, warm climate:	231	186	%

Model(s):				AMS 10-12 +ACVM270							
Type of heat source/sink:				Air-to-water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				Yes							
Heat pump combination heater:				Yes							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147											
Rated heat output				Prated	10,0	kW		Seasonal space heating energy efficiency			
								η_s	126	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>			
Tj = -7 °C	Pdh	6,7	kW	Tj = -7 °C	COPd	1,96	-				
Tj = +2 °C	Pdh	5,4	kW	Tj = +2 °C	COPd	3,22	-				
Tj = +7 °C	Pdh	3,5	kW	Tj = +7 °C	COPd	4,47	-				
Tj = +12 °C	Pdh	3,9	kW	Tj = +12 °C	COPd	5,45	-				
Tj = biv	Pdh	7,7	kW	Tj = biv	COPd	2,31	-				
Tj = TOL	Pdh	6,7	kW	Tj = TOL	COPd	1,94	-				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-				
Bivalent temperature	T _{biv}	-3,9	°C	Operation limit temperature				TOL	-10	°C	
Cycling interval capacity for heating	P _{cyc}		kW	Cycling interval efficiency				COP _{cyc}		-	
Degradation co-efficient	C _{dh}	0,98	-	Heating water operating limit				WTOL	58	°C	
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>			
Off mode	P _{OFF}	0,002	kW	Rated heat output				P _{sup}	3,3	kW	
Thermostat-off mode	P _{TO}	0,014	kW								
Standby mode	P _{SB}	0,015	kW	Type of energy input				Electric			
Crankcase heater mode	P _{CK}	0,035	kW								
<i>Other items</i>											
Capacity control	variable			Rated air flow rate, outdoors					4380	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	35/58	dB	Rated water flow rate, indoor heat exchanger					0,86	m ³ /h	
Annual energy consumption	Q _{HE}	6406	kWh	Rated brine or water flow rate, outdoor heat exchanger						m ³ /h	
<i>For heat pump combination heater:</i>											
Declared load profile				XL				Water heating energy efficiency			
								η_{wh}			
								98			
								%			
Daily electricity consumption	Q _{elec}	7,75	kWh	Daily fuel consumption				Q _{fuel}		kWh	
Annual electricity consumption	AEC	1702	kWh	Annual fuel consumption				AFC		GJ	
Approved by:											
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							