


## ESKV-L 40

Cable gland, polyamide, M40, RAL 7035 with long thread



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

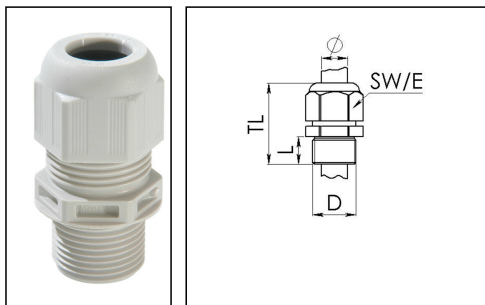

|                          |                                |
|--------------------------|--------------------------------|
| Material cable gland     | Polyamide                      |
| Material sealing gasket  | EPDM                           |
| Protection class         | IP69, IP68 (5 bar 30 min)      |
| Temp. range min          | -40 °C                         |
| Temp. range max          | 100 °C                         |
| Glow wire test           | 750 °C                         |
| Thread type              | M                              |
| Ø Connection thread D    | 40                             |
| Lead                     | 1,5                            |
| Length screw-in thread L | 18 mm                          |
| Ø cable diameter min     | 16 mm                          |
| Ø cable diameter max     | 28 mm                          |
| Ø cable diameter UL      | 17,4 mm - 26,4 mm              |
| Key width SW             | 46 mm                          |
| Collar diameter (E)      | 51 mm                          |
| Total length TL          | 58 mm - 71 mm                  |
| Type of cable anchorage  | A                              |
| Install. torques fitting | 20 N m                         |
| Install. torques cap nut | 20 N m                         |
| Impact category          | 4                              |
| Equipment                | Incl. connection thread gasket |
| Product Color            | RAL 7035                       |
| Type                     | ESKV-L 40                      |
| Order no. RAL 7035       | 10066395                       |
| Packing unit             | 10                             |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

ETIM-Classification

EC000441

## Recommended accessories

|               |          |
|---------------|----------|
| EMUG 40       | 10060775 |
| RDE 40        | 10062187 |
| BS 28         | 10064016 |
| MFD 40/08/060 | 10064346 |
| MFD 40/07/080 | 10064347 |
| MFD 40/07/070 | 10064348 |
| MFD 40/04/100 | 10101017 |
| MFD 40/09/069 | 10101427 |
| MFD 40/03/125 | 10102054 |
| MFD 40/06/065 | 10102171 |
| MFD 40/06/090 | 10102172 |

17.12.2020

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice