

Kulventil 2500 K | Ball valve 2500 K | Palloventtiili 2500 K

2500 K



Ball valve 2500K, PN63/40

- EN 10204-3.1 Material certification
- Handle locking

- Full bore
- CE-marking
- Antistatic construction

Kulventil 2500K, PN63/40


- EN 10204-3.1 Materialintyg
- Låsbart handtag

- Fullt genomlopp
- CE-märkt
- Antistatisk

Palloventtiili 2500K, PN63/40

- EN 10204-3.1 materiaalitodistus
- Lukittava kahva

- Täysiaukkoinen
- CE-merkinnällä
- Maadoitettu rakenne

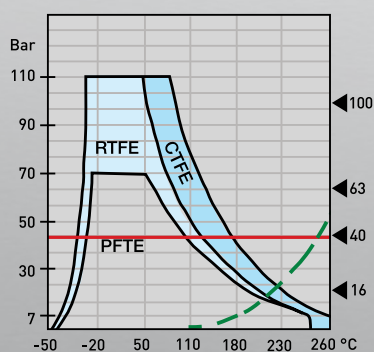


CTFE = Vakio/Standard/Standard

RTFE: PTFE+15% lasikuitu
PTFE+15 % glasfiber
PTFE+15% glassfiber
CTFE PTFE+25% hiilikuitu*)
PTFE+25% kolfiber*)
PTFE+25% carbon*)
----- Kyllästetty höyry
Mättad ånga
Saturated Steam Curve

Paine/lämpötilakäyrästä
Tryck- och temperaturkurvor
Pressure & Temperature Rating

Kulventil 2500 K | Ball valve 2500 K | Palloventtiili 2500 K

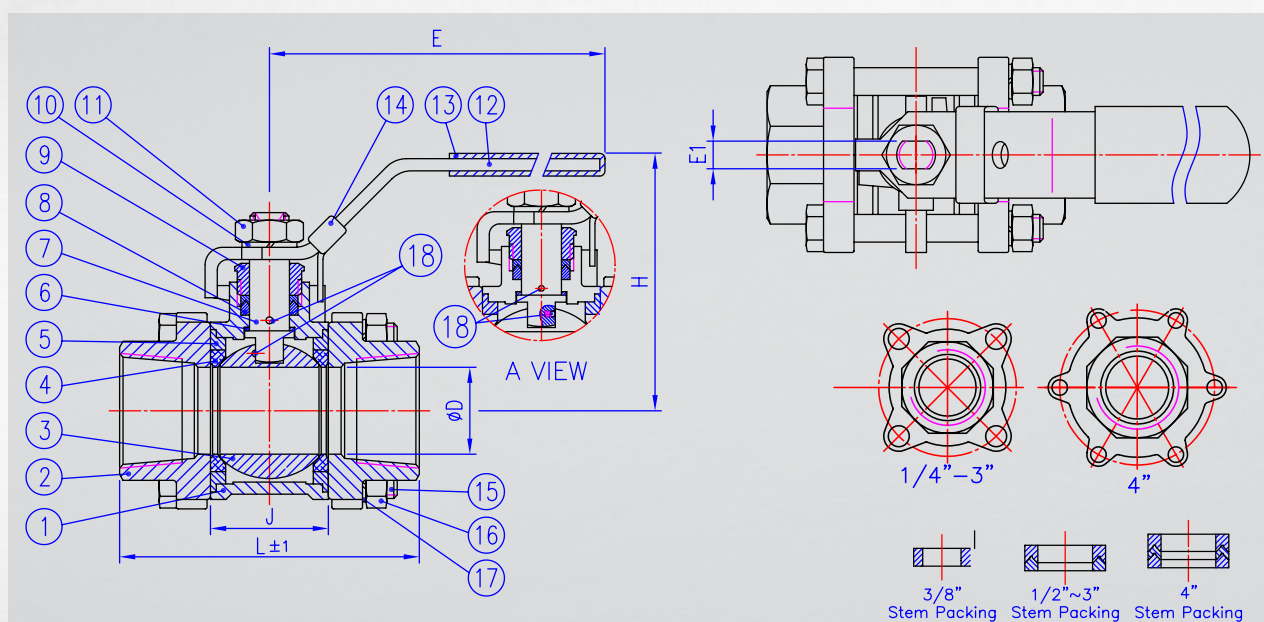

NO.	Osa	Del	Part	lkm st qty	Materiaali Material Material
1	Runko	Hus	Body	1	CF8M
2	Päädýt	Ändstycke	End cap	2	CF8M
3	Pallo	Kula	Ball	1	AISI 316
4	Pallotiiviste	Kultätning	Ball seat	2	25% CTFE
5	Runkotiiviste	Hustätning	Body seat	2	25% CTFE
6	Karatiiviste	Spindeltätning	Stem seal	1	25% CTFE
7	Kara	Spindel	Stem	1	AISI 316
8	V-rengastiiviste	Glandpackning	Stem packing	1	25% CTFE
9	Karaholkki	Spindelbussning	Gland bush	1	AISI 304
10	Aluslevy	Spindelbricka	Stem washer	1	AISI 304
11	Karan mutteri	Spindelmutter	Stem nut	1	AISI 304
12	Kahva	Handtag	Handle	1	AISI 304
13	Holkki	Plastöverdrag	Handle sleeve	1	VINYL
14	Kahvan lukko	Lås	Locking devise	1	AISI 304
15	Runkopultit	Bultar	Bolt	4 - 6	AISI 304
16	Mutterit	Muttrar	Bolt nut	4 - 6	AISI 304
17	Aluslevyt	Brickor	Bolt washer	4 - 6	AISI 304
18	Maadoitus	Anti-static	Anti-static device	2	AISI 316

Mitat Dimensioner Dimensions (mm)			E, H, L ± 1mm								
Koodi Kod Code	SAP	Koko Storlek Size	DN	ØD	L	H	E	E1	J	KG	PN
3761003	ABW358	3/8"	10	12,7	56,6	54	102	5	18,6	0,34	63
3761004	ABW359	1/2"	15	15	65,7	64	132	6,5	23,6	0,53	63
3761005	ABW360	3/4"	20	20	76,2	67	132	6,5	28	0,70	63
3761006	ABW361	1"	25	25	86,2	75	167	8	33,9	1,02	63
3761007	ABW362	1 1/4"	32	32	102,8	80	167	8	42,5	1,62	63
3761008	ABW363	1 1/2"	40	38	119,4	90	192	9,7	53,2	2,41	63
3761009	ABW364	2"	50	50	131,4	98	192	9,7	64,6	3,66	63
3761010	ABW365	2 1/2"	65	65	164	137	252	12	87	7,35	40
3761011	ABW366	3"	80	80	182,7	147	252	12	99	10,21	40
3761012	ABW367	4"	100	100	235,6	175	282	15	127	20,76	40