


Freedom Series BS Self-Lubricating Chains

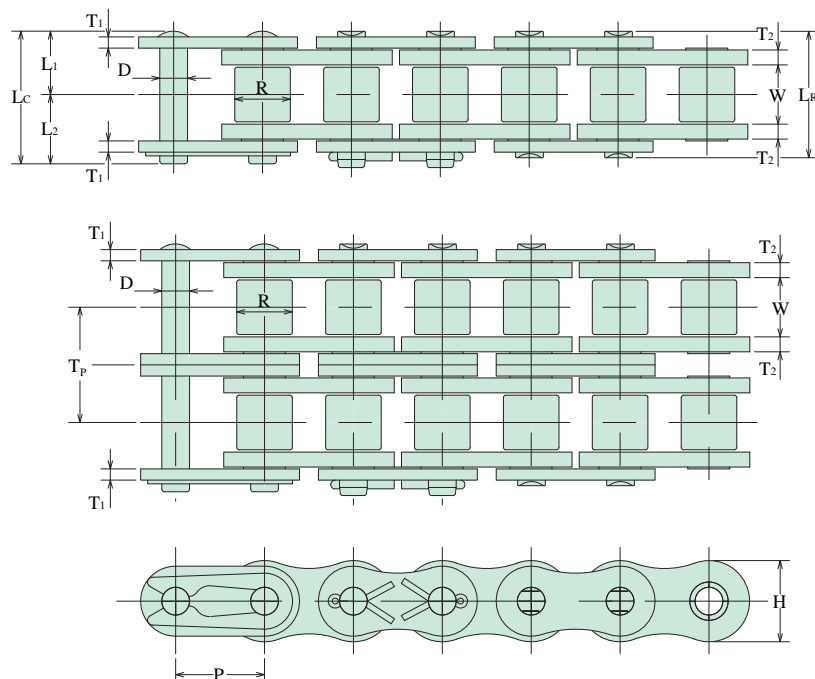

Chain No.	Dimensions - mm												Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin					Plate			Trans. Pitch			
		Width	Dia.	Dia.	Length				Height	Thickness					
		P	W	R	D	LR	LC	L1	L2	H	T1				
08B-FS	12.70	7.75	8.51	4.45	16.7	18.6	8.4	10.2	11.8	1.5	1.5	13.92	16.8	2.9	0.6
10B-FS	15.875	9.65	10.16	5.08	19.4	21.0	9.7	11.3	14.5	1.65	1.65	16.59	24.6	4.4	0.9
12B-FS	19.05	11.68	12.07	5.72	22.0	24.4	11.0	13.4	17.4	1.8	1.8	19.46	32.4	6.3	1.1
16B-FS	25.40	17.02	15.87	8.26	35.1	38.2	17.6	20.6	21.0	3.1	3.9	31.88	74.6	12.2	2.6
20B-FS	31.75	19.56	19.05	10.16	40.2	44.0	20.1	23.9	29.3	3.5	4.7	36.45	128.3	19.1	3.8
24B-FS	38.10	25.40	25.40	14.63	53.4	58.1	26.7	31.4	35.1	4.7	5.9	48.36	195.6	25.5	7.3
28B-FS	44.45	31.00	27.94	15.88	65.1	70.5	32.6	37.9	37.0	6.3	7.4	59.56	215.7	34.8	9.3
32B-FS	50.80	31.00	29.21	15.88	64.2	69.6	32.1	37.5	42.2	6.3	6.9	58.55	274.6	44.1	9.9

*Standard sprocket is available.

*Attachment can be installed.